EKLECMATIC
Elevator | Door Control | Automation

+1 905-531-6417
www.eklecmatic.ca
info@eklecmatic.ca

DOOR CONTACT - EDL SERIES


Enclosure Material	Cast Aluminum Alloy/Stainless Steel/Plastic
Contact Material	Cu-rivets with silver coating
Contact Type	1NC, 2NC
Switching Frequency	30 ops/min
Voltage Ratings	230VDC/240VAC
Current Ratings	2A
Ambient Temperature	-54~+121°C(-65~250°F)
Service Life	100,000 cycles
Degree of Protection	IP20 to IEC/EN60529










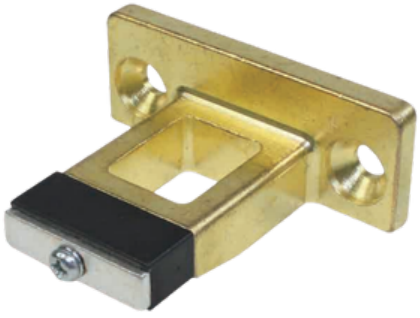

+1 905-531-6417
www.eklecmatic.ca
info@eklecmatic.ca


EDL-1



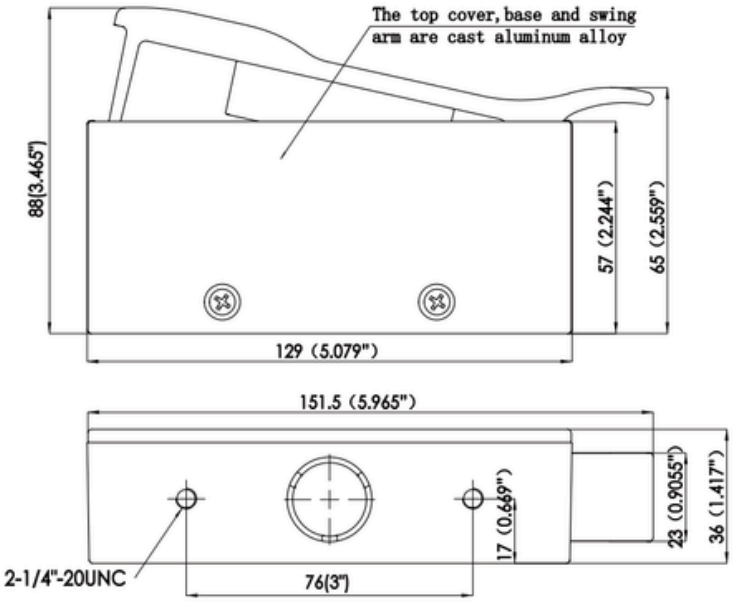

EDLP-1




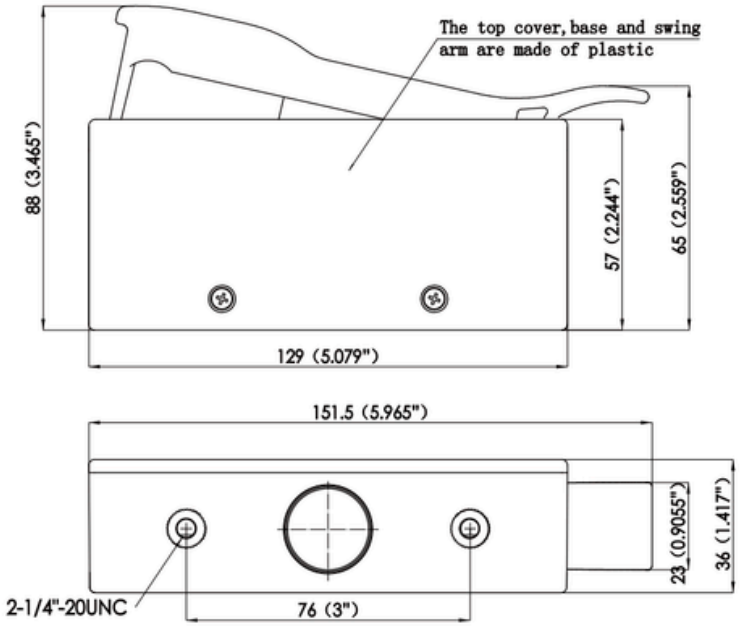

+1 905-531-6417
www.eklecmatic.ca
info@eklecmatic.ca


EDL-2LB



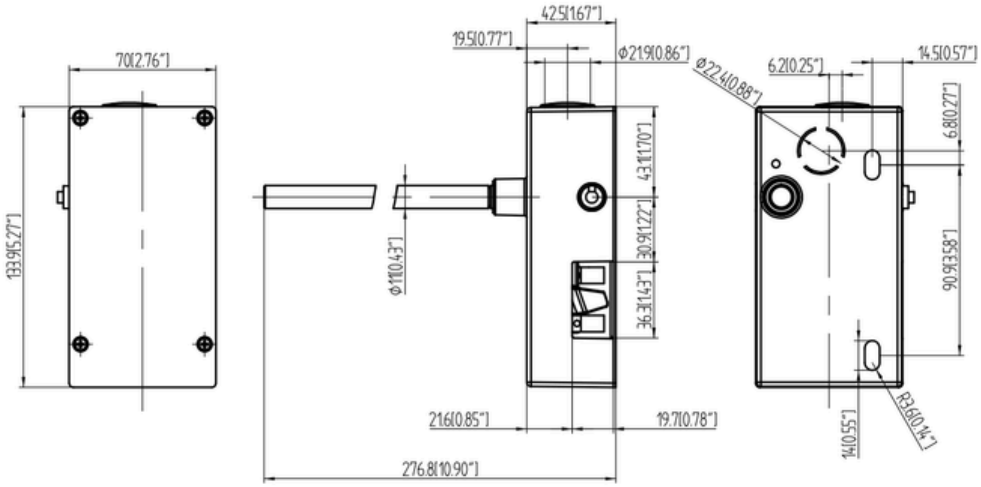


EDL-2L



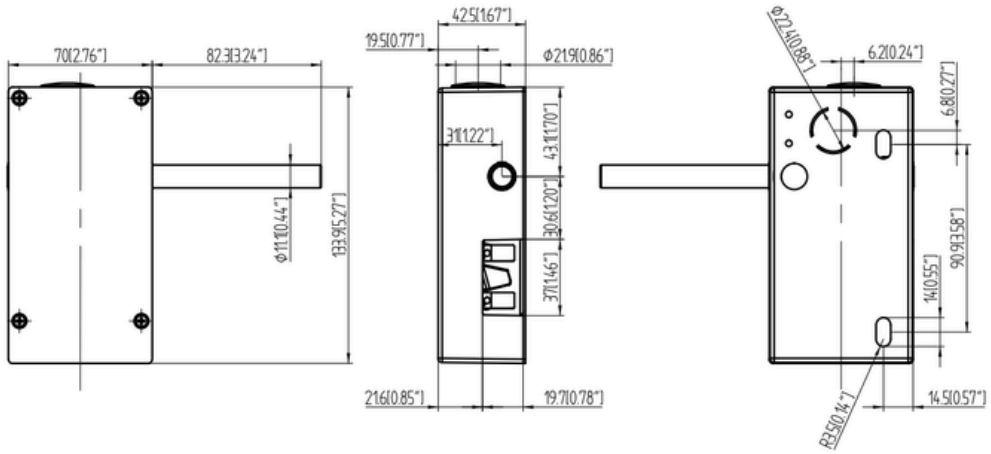

EDL-3LB




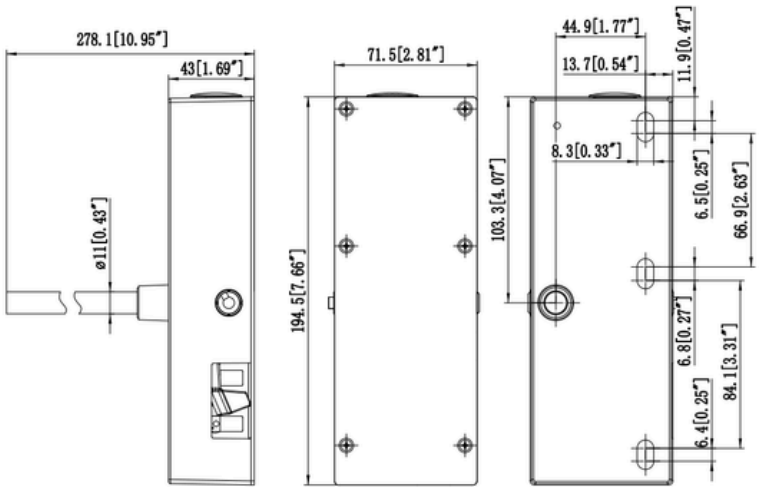

+1 905-531-6417
www.eklecmatic.ca
info@eklecmatic.ca


EDL-3RB



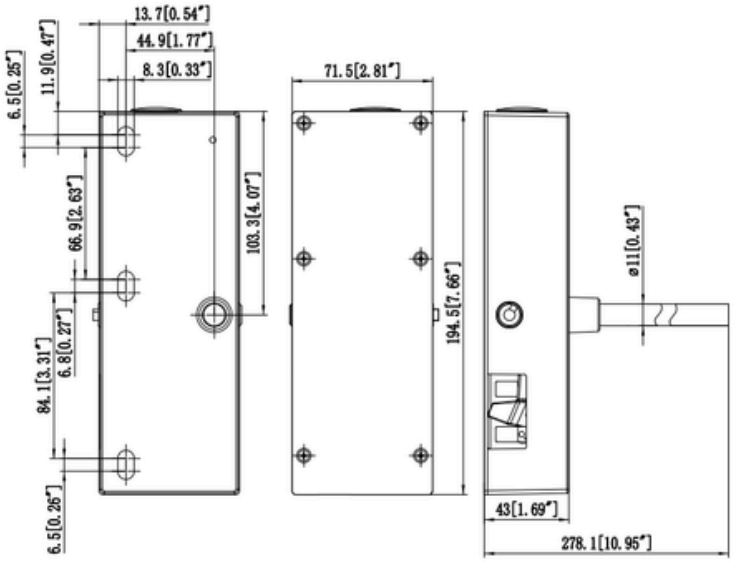

Lever Options




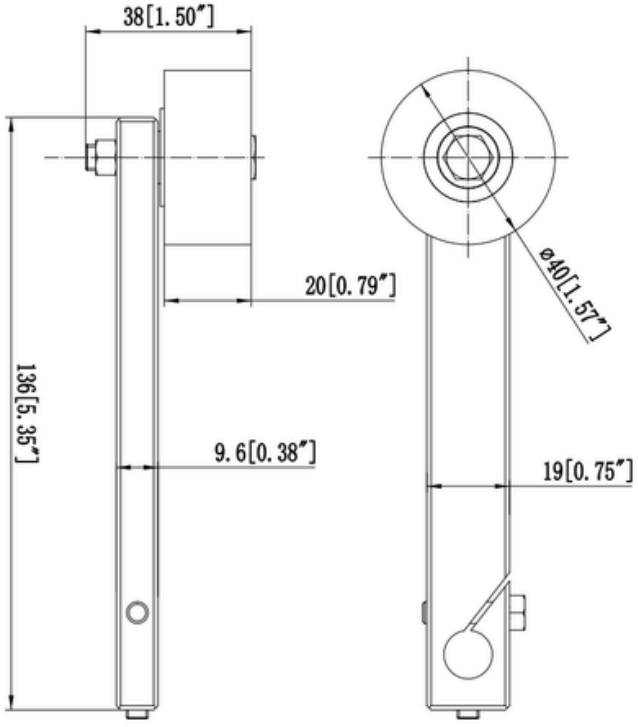

+1 905-531-6417
www.eklecmatic.ca
info@eklecmatic.ca

EDL-3-K1



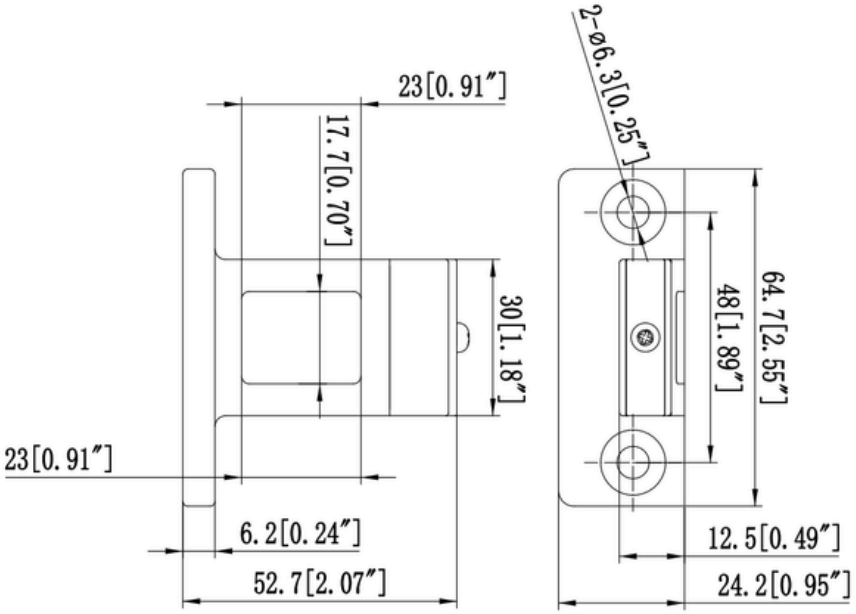

EDL-3-K3



