# CH - CA - CF and MH - MA - MF C-TYPE standard version

| inserts | | page: |
|---|---|---|
| **CDD** | 42 poles + ⏚ | **78** |
| **CDS** | 18 poles + ⏚ | **-** |
| **CDSH** | 18 poles + ⏚ | **87** |
| **CNE** | 10 poles + ⏚ | **111** |
| **CSE** | 10 poles + ⏚ | **-** |
| **CSH** | 10 poles + ⏚ | **111** |
| **CSH S** | 10 poles + ⏚ | **123** |
| **CCE** | 10 poles + ⏚ | **131** |
| **CMSH** | 3+2 (aux) poles + ⏚ | **136** |
| **CMCE** | 3+2 (aux) poles + ⏚ | **137** |
| **CSS** | 10 poles + ⏚ | **149** |
| **CQE** | 18 poles + ⏚ | **169** |
| **CX** | 8/24 poles + ⏚ | **194** |
| **MIXO** | 3 modules | **262 - 317** |

**hoods with 4 pegs**



**hoods with 4 pegs**
**M40 cable entry with 20 mm thread length**




| description | part No. | entry Pg | part No. | entry M | part No. | entry Pg | part No. | entry M |
|---|---|---|---|---|---|---|---|---|
| with pegs, side entry | **CHO 10** | 16 | **MHO 10.20** | 20 | | | | |
| with pegs, side entry | | | **MHO 10.25** | 25 | | | | |
| with pegs, side entry, high construction | **CAO 10.21** | 21 | **MAO 10.32** | 32 | | | | |
| with pegs, side entry, high construction | **CAO 10.29** | 29 | **MAO 10.40** | 40 | | | | |
| with pegs, side entry, high construction, without adapter [1] | | | | | **CFO 10.21** | 21 | **MFO 10.32** | 32 |
| with pegs, side entry, high construction, without adapter [1] | | | | | **CFO 10.29** | 29 | **MFO 10.40** | 40 |
| with pegs, top entry | **CHV 10** | 16 | | | | | | |
| with pegs, top entry [2] | | | **MHV 10.20** | 20 | | | | |
| with pegs, top entry | | | **MHV 10.25** | 25 | | | | |
| with pegs, top entry, high construction | **CAV 10.21** | 21 | **MAV 10.32** | 32 | | | | |
| with pegs, top entry, high construction | **CAV 10.29** | 29 | **MAV 10.40** | 40 | | | | |
| with pegs, top entry, high construction, without adapter [1] | | | | | **CFV 10.21** | 21 | **MFV 10.32** | 32 |
| with pegs, top entry, high construction, without adapter [1] | | | | | **CFV 10.29** | 29 | **MFV 10.40** | 40 |
| with pegs, frontal entry, high construction | **CAF 10** | 16 | **MAF 10.20** | 20 | | | | |
| with pegs, frontal entry, high construction, without adapter [1] | **CFF 10** | 16 | **MFF 10.20** | 20 | | | | |

[1] enclosure without adapter, threaded on the body, to be used only with a complete cable gland.


[2] can only be used with a complete cable gland (to be purchased separately).

IP degrees are according to the type of lever of the counterpart enclosures.
Alternatively, hoods with pegs may be coupled with fixed enclosures:
- C-TYPE, IP65 or IP66/IP69 stainless steel lever, from page 393 to page 400
- C7, IP66/**IP67**/IP69 stainless steel lever, page 438
- CV, IP65 or IP66/IP69 stainless steel lever, page 448 and 449


**CHO (CAO)** and **MHO (MAO)**

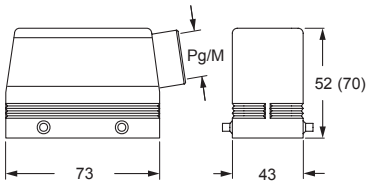



**CFO** and **MFO**

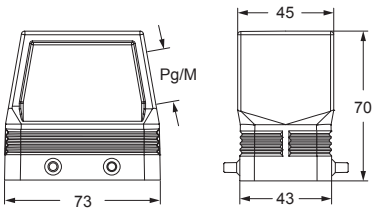



**CHV (CAV)** and **MHV (MAV)**

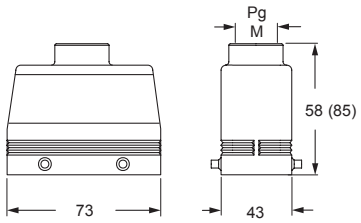


**CFV** and **MFV**

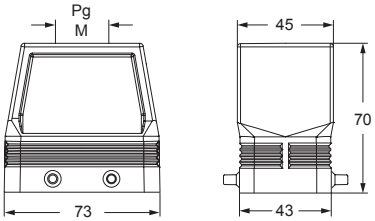


**CAF/CFF** and **MAF/MFF**

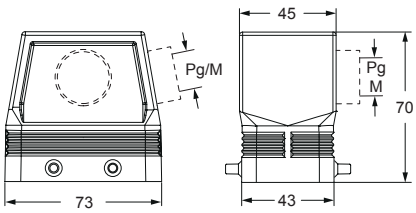


Type 4/4X/12

IP65 — insulating cable gland or fittings without gasket

IP66 IP67 IP69 — cable gland with O-Ring gasket
IP67 if hoods without adapters coupled with IP67 housings


# CH - CA - CF and MH - MA - MF C-TYPE standard version

| inserts | | page: |
|---|---|---|
| **CD** | 64 poles + ⏚ | **72** |
| **CDD** | 108 poles + ⏚ | **81** |
| **CDS** | 42 poles + ⏚ | **-** |
| **CDSH** | 42 poles + ⏚ | **89** |
| **CNE** | 24 poles + ⏚ | **113** |
| **CSE** | 24 poles + ⏚ | **-** |
| **CSH** | 24 poles + ⏚ | **113** |
| **CSH S** | 24 poles + ⏚ | **125** |
| **CCE** | 24 poles + ⏚ | **133** |
| **CMSH** | 10+2 (aux) poles + ⏚ | **140** |
| **CMCE** | 10+2 (aux) poles + ⏚ | **141** |
| **CSS** | 24 poles + ⏚ | **151** |
| **CQE** | 46 poles + ⏚ | **171** |
| **CQEE** | 64 poles + ⏚ | **177** |
| **CX** | 4/8 and 6/6 poles + ⏚ | **204 and 206** |
| **MIXO** | 6 modules | **262 - 317** |

**hoods with 4 pegs**



**hoods with 4 pegs**
**M40 cable entry with 20 mm thread length**

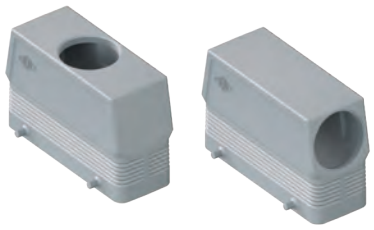


| description | part No. | entry Pg | part No. | entry M | part No. | entry Pg | part No. | entry M |
|---|---|---|---|---|---|---|---|---|
| with pegs, side entry | **CHO 24** | 21 | **MHO 24.25** | 25 | | | | |
| with pegs, side entry | | | **MHO 24.32** | 32 | | | | |
| with pegs, side entry, high construction | **CAO 24.21** | 21 | **MAO 24.32** | 32 | | | | |
| with pegs, side entry, high construction | **CAO 24.29** | 29 | **MAO 24.40** | 40 | | | | |
| with pegs, side entry, high construction, without adapter [1] | | | | | **CFO 24.21** | 21 | **MFO 24.32** | 32 |
| with pegs, side entry, high construction, without adapter [1] | | | | | **CFO 24.29** | 29 | **MFO 24.40** | 40 |
| with pegs, top entry | **CHV 24** | 21 | | | | | | |
| with pegs, top entry [2] | | | **MHV 24.25** | 25 | | | | |
| with pegs, top entry | | | **MHV 24.32** | 32 | | | | |
| with pegs, top entry | **CHV 24.29** | 29 | **MHV 24.40** | 40 | | | | |
| with pegs, top entry, high construction | **CAV 24.21** | 21 | **MAV 24.32** | 32 | | | | |
| with pegs, top entry, high construction | **CAV 24.29** | 29 | **MAV 24.40** | 40 | | | | |
| with pegs, top entry, high construction, without adapter [1] | | | | | **CFV 24.21** | 21 | **MFV 24.32** | 32 |
| with pegs, top entry, high construction, without adapter [1] | | | | | **CFV 24.29** | 29 | **MFV 24.40** | 40 |
| with pegs, frontal entry, high construction | **CAF 24.21** | 21 | **MAF 24.25** | 25 | | | | |
| with pegs, frontal entry, high construction | **CAF 24.29** | 29 | **MAF 24.32** | 32 | | | | |
| with pegs, frontal entry, high construction, without adapter [1] | **CFF 24.21** | 21 | **MFF 24.25** | 25 | | | | |
| with pegs, frontal entry, high construction, without adapter [1] | **CFF 24.29** | 29 | **MFF 24.32** | 32 | | | | |

[1] enclosure without adapter, threaded on the body, to be used only with a complete cable gland.


[2] can only be used with a complete cable gland (to be purchased separately).

IP degrees are according to the type of lever of the counterpart enclosures.
Alternatively, hoods with pegs may be coupled with fixed enclosures:
- C-TYPE, IP65 or IP66/IP69 stainless steel lever, from page 412 to page 422
- C7, IP66/**IP67**/IP69 stainless steel lever, page 441
- CV, IP65 or IP66/IP69 stainless steel lever, page 460 and 461


**CHO (CAO)** and **MHO (MAO)**

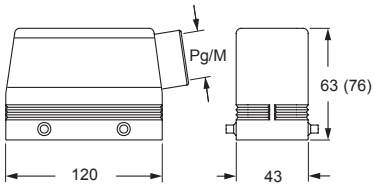


**CFO** and **MFO**

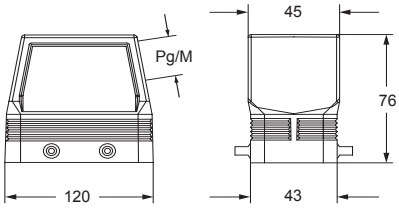



**CHV (CAV)** and **MHV (MAV)**

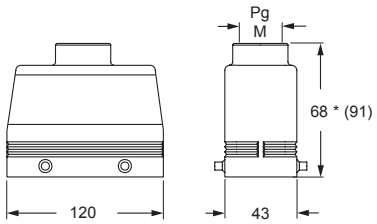



* 69,5 for Pg 29 - M40 versions

**CFV** and **MFV**

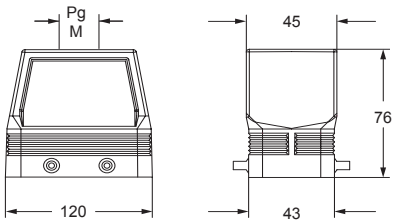


**CAF/CFF** and **MAF/MFF**

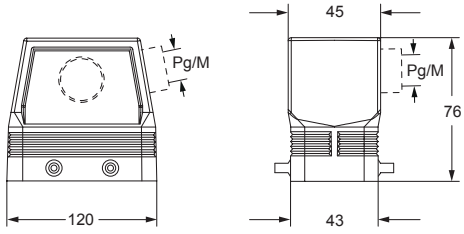


c UL us Type 4/4X/12

EN 60529 IP65 IEC 60529 — insulating cable gland or fittings without gasket

EN 60529 IP66 IP67 IP69 IEC 60529 — cable gland with O-Ring gasket
IP67 if hoods without adapters coupled with IP67 housings



dimensions shown in mm are not binding and may be changed without notice

# CH - CF and MH - MF C-TYPE standard version

| inserts | | page: |
|---|---|---|
| CD | 80 poles + ⏚ | 73 |
| CDD | 144 poles + ⏚ | 82 |
| CDS | 54 poles + ⏚ | - |
| CDSH | 54 poles + ⏚ | 90 |
| CNE | 32 poles + ⏚ | 114 |
| CSE | 32 poles + ⏚ | - |
| CSH | 32 poles + ⏚ | 114 |
| CSH S | 32 poles + ⏚ | 126 |
| CCE | 32 poles + ⏚ | 134 |
| CSS | 32 poles + ⏚ | 152 |
| CQE | 64 poles + ⏚ | 172 |
| CME | 12+4 (aux) poles + ⏚ | 142 |
| CMSH | 12+4 (aux) poles + ⏚ | 142 |
| CMCE | 12+4 (aux) poles + ⏚ | 143 |
| CP | 12 poles + ⏚ | 179 |
| MIXO | 4 + 4 modules | 262 - 317 |

insert dimensions:
**2 x (77,5 x 27) mm**

**hoods with 4 pegs and 2 levers**




**hoods with 2 pegs and 1 lever**




| description | part No. | entry Pg | part No. | entry M | part No. | entry Pg | part No. | entry M |
|---|---|---|---|---|---|---|---|---|
| with pegs, side entry | **CHO 32.29** | 29 | **MHO 32.32** | 32 | | | | |
| with pegs, side entry | **CHO 32** | 36 | **MHO 32.40** | 40 | **CHO 32 L** | 36 | **MHO 32 L40** | 40 |
| with pegs, side entry | **CHO 32.42** | 42 | **MHO 32.50** | 50 | | | | |
| with pegs, side entry, without adapter [1] | **CFO 32.29** | 29 | **MFO 32.32** | 32 | | | | |
| with pegs, side entry, without adapter [1] | **CFO 32** | 36 | **MFO 32.40** | 40 | **CFO 32 L** | 36 | **MFO 32 L40** | 40 |
| with pegs, side entry, without adapter [1] | **CFO 32.42** | 42 | **MFO 32.50** | 50 | | | | |
| with pegs, top entry | **CHV 32.29** | 29 | **MHV 32.32** | 32 | | | | |
| with pegs, top entry | **CHV 32** | 36 | **MHV 32.40** | 40 | **CHV 32 L** | 36 | **MHV 32 L40** | 40 |
| with pegs, top entry | **CHV 32.42** | 42 | **MHV 32.50** | 50 | | | | |
| with pegs, top entry, without adapter [1] | **CFV 32.29** | 29 | **MFV 32.32** | 32 | | | | |
| with pegs, top entry, without adapter [1] | **CFV 32** | 36 | **MFV 32.40** | 40 | **CFV 32 L** | 36 | **MFV 32 L40** | 40 |
| with pegs, top entry, without adapter [1] | **CFV 32.42** | 42 | **MFV 32.50** | 50 | | | | |
| with levers and gasket, top entry | **CHV 32 G29** | 29 | **MHV 32 G32** | 32 | | | | |
| with one or two levers and gasket, top entry | **CHV 32 G** | 36 | **MHV 32 G40** | 40 | **CHV 32 LG** | 36 | **MHV 32 LG40** | 40 |
| with levers and gasket, top entry | **CHV 32 G42** | 42 | **MHV 32 G50** | 50 | | | | |
| with levers and gasket, top entry, without adapter [1] | **CFV 32 G29** | 29 | **MFV 32 G32** | 32 | | | | |
| with lever/s and gasket, top entry, without adapter [1] | **CFV 32 G** | 36 | **MFV 32 G40** | 40 | **CFV 32 LG** | 36 | **MFV 32 LG40** | 40 |
| with levers and gasket, top entry, without adapter [1] | **CFV 32 G42** | 42 | **MFV 32 G50** | 50 | | | | |

[1] enclosure without adapter, threaded on the body, to be used only with a complete cable gland.


**CHO/CFO** and **MHO/MFO**





**CHO/CFO L** and **MHO/MFO L**

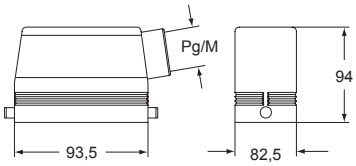



**CHV/CFV** and **MHV/MFV**

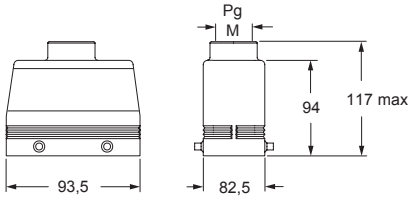



**CHV/CFV L** and **MHV/MFV L**

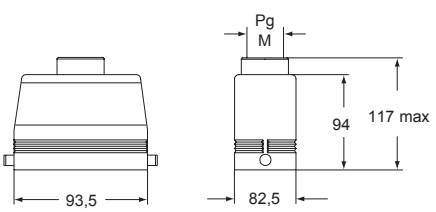


**CHV/CFV G** and **MHV/MFV G**

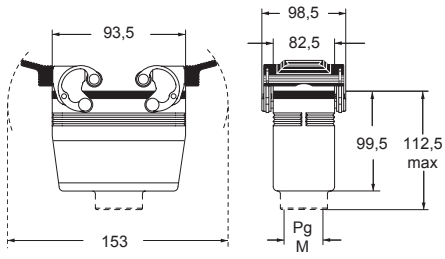


**CHV/CFV LG** and **MHV/MFV LG**

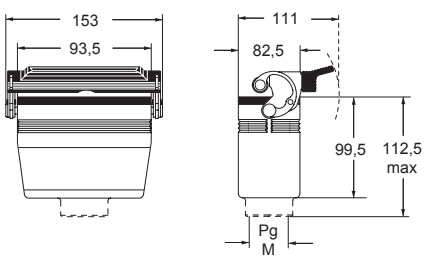


Type 4/4X/12

IP65 insulating cable gland or fittings without gasket

IP66 IP69 cable gland with O-Ring gasket





dimensions shown in mm are not binding and may be changed without notice