


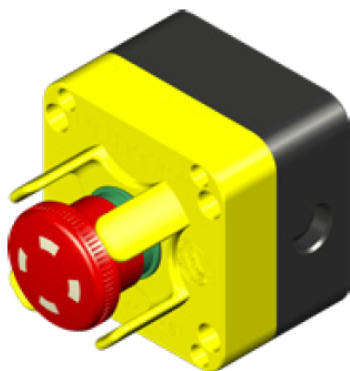

These emergency stations may be equipped with:

- NO screw contacts
- NC screw contacts
- NO-NC-NO contacts

NO contact / NC contact

Contact operation	slow action double breaking
Contact terminal type	M3.5 screw
Contact tightening torque	1.2 N·m (EN60947-1) 12 lb·in (UL508)
Connectable section	1 ... 2.5 mm ²
Wire peeling length	8 mm
Marking	CE, IMQ, RINA, EAC, CCC, UL

Rated insulation voltage	Ui	690 V
Rated impulse withstand voltage	Uimp	4 kV
Rated thermal current	Ith	16 A
Rated enclosed thermal current	Ithe	10 A
Frequency		50/60 Hz

UL 508 characteristics

Rated insulation voltage	Ui	10 A	600 V AC
		2.5 A	125 V DC
Rated impulse withstand voltage	Uimp	A600	Q600

SLA11NPNC...

EMERGENCY STATIONS WITH PUSH-PULL TO RELEASE MUSHROOM PUSH BUTTON WITH Ø40 CAP

Material	ABS V0
IP rating	IP65
Knockout	M16 / M20


NO-NC-NO contact

Contact operation	slow action double breaking
Contact terminal type	spring
Connectable section	0.5 ... 2.5 mm ² 18 ... 12 AWG
Wire peeling length	8 mm
Marking	CE, IMQ, RINA, EAC, CCC, UL

Rated insulation voltage	Ui	690 V
Rated impulse withstand voltage	Uimp	4 kV
Rated thermal current	Ith	16 A
Rated enclosed thermal current	Ithe	10 A
Frequency		50/60 Hz

UL 508 characteristics

Rated insulation voltage	Ui	10 A	600 V AC
		2.5 A	125 V DC
Rated impulse withstand voltage	Uimp	A600	Q600

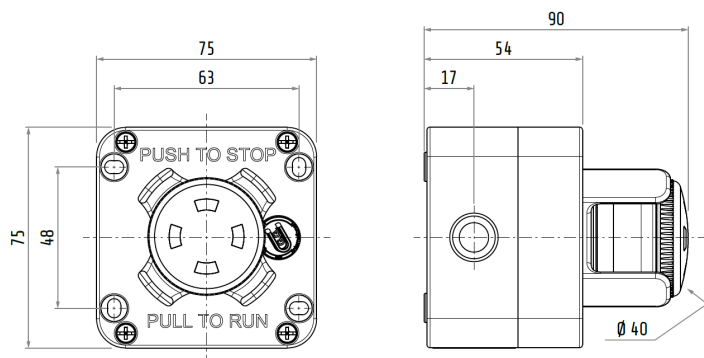

Dimensions in mm
Illustrations NOT in scale