

## MVS SERIES VENTILATION FANS

Our MVS-12 and MVS-14 complete fan assemblies are UL Listed and engineered for high-performance ventilation in commercial and industrial applications. These fans deliver powerful airflow—up to 300 CFM—with efficient, quiet operation and durable construction.

### KEY FEATURES

#### Enclosure:

- Material: 16 GA Steel with black powder-coated finish
- Wiring: Handy box included for convenient electrical connection

#### Motor:

- Two-speed, UL-Listed
- Input: 115 VAC, 60 Hz, 0.33A
- Sealed ball bearing design for extended life
- Quiet and efficient performance

#### Airflow:

- High Speed: Up to 300 CFM (Free Air)
- Low Speed: Up to 250 CFM (Free Air)


#### Blade:

- 5-paddle aluminum construction
- Optimized for maximum airflow and low noise

### MODELS & DIMENSIONS


#### MVS-12

- Overall Dimensions: 12" Diameter × 5.70" Height
- Cutout Hole Diameter: 9.75"
- Mounting Pattern: Supports both 3-hole and 4-hole mounting
- Compatible Grille: FG-12-W (See Accessories)

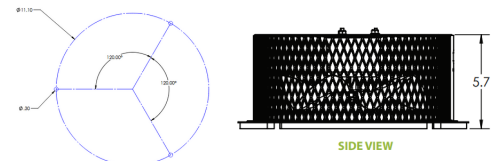

#### MVS-14

- Overall Dimensions: 14" Diameter × 5.70" Height
- Cutout Hole Diameter: 11.75"
- Mounting Pattern: 4-hole only
- Compatible Grille: FG-14-W (See Accessories)

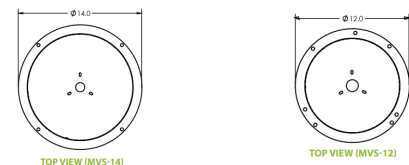

### CERTIFICATIONS

- UL Listed (Entire unit, not just components)
- Tested to:
  - ASME A17.1
  - UL 508
  - CAN/CSA B44.1

