



PENDANT AND WALL-MOUNTED CONTROL STATIONS

Pages 6 .. 65

Ergonomic, resistant and flexible solutions for applications on cranes, hoists and other industrial lifting machinery. Available complete devices, custom kits, spare parts and accessories.

P02  COMPLETE DEVICE with two push buttons - single row for small hoist Pages 8 .. 11	P03  COMPLETE DEVICE with three push buttons - single row for small hoist Pages 12 .. 15	HP03  COMPLETE DEVICE with three push buttons for hoist ergonomic shape Pages 16 .. 19	HP05  COMPLETE DEVICE with five push buttons for hoist ergonomic shape Pages 20 .. 23	
HP07  COMPLETE DEVICE with seven push buttons for crane ergonomic shape Pages 24 .. 29	HP08  COMPLETE DEVICE with eight push buttons for crane ergonomic shape Pages 30 .. 35	PLN  COMPLETE DEVICE from 5 to 12 push buttons - single row for crane Pages 36 .. 47	TLP  COMPLETE DEVICE from 1 to 4 push buttons - single row for truck tail lift Pages 48 .. 53	
P02K  CUSTOM KITS with 2 holes single row	P03K  CUSTOM KITS with 3 holes single row	PL .. K  CUSTOM KITS from 5 to 12 holes single row Pages 54 .. 64	PLB .. K  CUSTOM KITS from 4 to 14 holes double row	TLP .. K  CUSTOM KITS from 1 to 5 holes single row

SPARE PARTS AND ACCESSORIES

Page 65

ROTARY GEAR LIMIT SWITCHES

Pages 66 .. 89

Rotary gear limit switches represent a reliable solution as response to different exigencies of precision and durability, they are used to control specific motions in various industrial lifting machinery.

FGR0  Pages 70 .. 74	FGR1  Pages 75 .. 78	FGR2  Pages 79 .. 82	FGR3  Pages 83 .. 85
---	---	---	---

SPARE PARTS AND ACCESSORIES

Pages 86 .. 89

POSITION LIMIT SWITCHES

Pages 90 .. 101

Position limit switches are used particularly in industrial and construction lifting plants, in the automation industry, in stage technology, in particular for the control of overhead travelling cranes, jib cranes and machine tools.

FFH  Pages 94 .. 95	FCR  Pages 96 .. 97	FFH2C-1  Pages 98 .. 99	FCP245  Pages 100 .. 101
--	--	--	---

SLIP RINGS

Pages 102 .. 103

The slip rings are used in electromechanical devices including rotary tables, carousels for recreational entertainment and in general to feed organs of machinery in circular motion.

SCUDO



Pages 102 .. 103

WARNING HORNS

Pages 104 .. 105

Audible signaling devices.

G




Pages 104 .. 105

PENDANT CONTROL STATIONS


Giovenzana International B.V. has over 65 years of experience in designing and manufacturing pendant control stations and wall-mounted control stations for auxiliary and direct control, used to command and control industrial machinery. They are characterized by an ergonomic user-friendly design, an high protection class degree and high operating reliability and switching capacity. They are suitable in different sizes with a wide range of operating and switching components for various applications.

APPLICATIONS


- **Industrial and construction lifting plants** to control gantry cranes, track cranes, jib cranes, wall-mounted jib cranes, tower cranes and winches for construction sites;
- **Automation industry** to command and control systems to manage machines and processes;
- **Waste disposal industry** to control the movement of machines and equipment.



HOIST

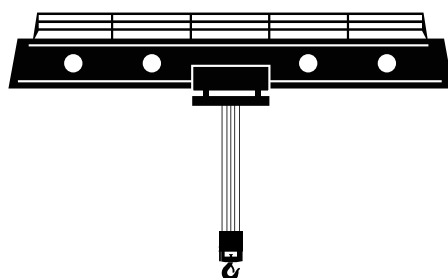

CRANE



TRUCK TAIL LIFT

Safety operating control for handling system

Giovenzana International B.V. pendant control stations and wall-mounted control stations - for universal operation of cranes, hoists and machinery - are available as **complete devices** or in **kit versions** that allows to design a tailor made product, totally customizable for every customers' needs and requirements.

The range includes different configurations (from 2 to 14 push buttons) with spare parts and accessories, such as emergency push buttons, key and lever selector switches, push buttons with laser symbolism, single led lamps. Equipped with contact support, also interlocked, to facilitate wiring.

The components are available with a high degree of protection against weather effects, high mechanical and electrical durability and resistance. All components have to be reliable and safe to ensure good handling control, guarantee maximum operating safety, prevent personal injuries and damage to objects.

The complete range of pendant stations is CE marked. On request our pendant stations - complete devices - could be UL certified for the American market, EAC certified for the Eurasian markets, CCC certified suitable for the Chinese market, to the quality levels required in different countries. All our electrical parts are manufactured in compliance with the Directives and Standards in conformity to global markets' needs.

FEATURES

- Available complete devices (A) or custom kits (B) to be assembled using separated components and common accessories;




- Functions: 1 or 2 speed up, 6 movements, start/alarm push button, emergency stop option available;
- Complies with IEC standards;
- CE, CCC, EAC marked;
- Available with UL/CSA requirements, upon request also in V0 material, UL approved;
- Spring loaded or screw clamp connection.

BENEFITS

- › **High protection**
IP65 Protection class degree
- › **Standard and customized configuration**
Different sizes with wide range of operating and switching components
Tailor made configuration and combination
- › **Easy use, resistance and durability**
Ergonomic user-friendly design in various configurations from 2 to 14 operating elements
- › **Guaranteed safety**
Certified contact elements for auxiliary and direct control
High operating reliability and switching capacity

SERIES





Single row pendant control station with two push buttons for small hoist

Features

- Bi-directionality is mechanically interlocked;
- IP65 Double insulation (IEC / EN 60529);
- Laser engraved symbols according to EN 60204-1, FEM 9.941;
- Shock proof and heat resistant;
- Available versions: for single or double speed engines and direct control 1 kW - 1 speed;
- Available with UL/CSA requirements;
- Available upon request also in V0 material, UL approved;
- Available in kit version.

Available codes

Available codes						
P02.RM Single speed						
P02.1 Single speed						
P02.2 Single speed						
P02.4 Single speed						
P02.CD Direct control / Single speed						
P02.D2 Double speed						

Compliance and certifications

- EN 60947-1 (2007/A1 : 2011/A2 : 2014)
- EN 60947-5-1 (2004/A1 : 2009/AC : 2004/AC : 2005)
- EN ISO 13850 (2015)
- EN 60204-1 (2006/A1 : 2009)
- EN-ISO 13849-1 (2015)
- EN ISO 13849-2 (2012)
- EN 60529 (1991/A1 : 2000/A2 : 2013)
- EN 50581 (2012)
- IEC 63000 (2016)
- 2014/35/UE
- 2011/65/UE
- 2015/863/UE

General characteristics		
Compliant to standards		IEC / EN60947-5-1
Material		PP
Material Group		II
Pollution class		3
Temperature	operating storage	-25°C ... +70°C -30°C ... +70°C
Cable entry		rubber cable sleeve Ø 7 ... 18 mm

Electrical characteristics - Contact blocks


Marking		 (For contacts by direct control only CE certification is valid)	
Rated insulation voltage [Ui]		690 V *	
Rated impulse withstand voltage [Uimp]		4 kV *	
Frequency		50/60 Hz *	
Rated thermal current [Ith]		16 A *	
Rated thermal current in enclosure [Ithe]		10 A	
Rated operational current [Ie]			
AC-15 alternate current	type: PL0040..	24 V	16 A *
		60 V	12 A
		120 V	8 A
		240 V	6 A
		400 V	4.5 A
		440 V	3.5 A
		500 V	3 A *
		690 V	1 A
DC-13 direct current	type: PL0040..	24 V	2 A *
		48 V	1.2 A
		60 V	0.85 A
		110 V	0.4 A
		220 V	0.25 A *
Conditional short circuit withstand current		1000 A *	
Fuses rating gG		10 A * - 500 V	
Contact insulation resistance		≤ 25 mΩ	
Switching mechanism	type: PL0040..	slow break double gap contacts	
Positive operation		NC contact blocks - positive opening	
Operating force		4 N	
Electric durability AC-15		1 A	1.5 millions of cycles
		2 A	0.5 millions of cycles
		3 A	0.25 millions of cycles
Terminal type	type: PL0040..	M3.5 screw terminals	
Terminal capacity	type: PL0040..	N° 1 or 2 flexible and solid conductor 1 ... 2.5 mm²	
Climate resistance	IEC68 part 2-3 IEC68 part 2-30	damp heat, steady state damp heat, cyclic	

UL508 characteristics

Rated insulation voltage [Ui]		10 A - 600 V ac / 2.5 A - 125 V dc
Rated impulse withstand voltage [Uimp]		A600-Q600

* IMQ approved values

Available codes

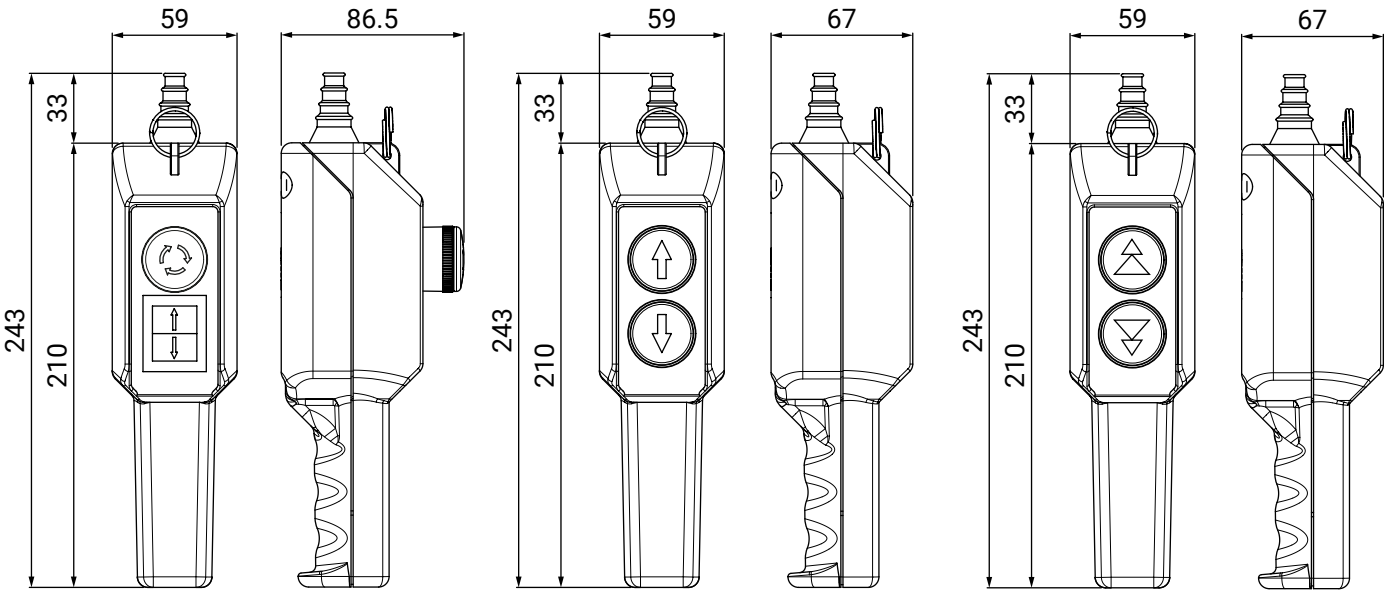


Standard versions

PRODUCT CODE	FUNCTION	LAYOUT	PUSH BUTTON	CONTACT CONFIGURATION	
P02.RM	Single speed				1 NC
					ON - OFF - ON
P02.1	Single speed				1 NO
					1 NO
P02.2	Single speed				2 NO
					2 NO
P02.4	Single speed				1 NC + 1 NO
					1 NC + 1 NO
P02.CD	Direct control Single speed				1 NC + 2 NO
					1 NC + 2 NO
P02.D2	Double speed				NO + NO
					NO + NO

PENDANT
STATIONS

CONTACT CODE	
Single speed	
	1 NC
PL004001	
	1 NO
PL004002	
	ON OFF ON
11708237	
Single speed Direct control	
	1 NC
PL004001CD	
	1 NO
PL004002CD	
Double speed	
	NO + NO
PL004010.S	



Single row pendant control station with three push buttons for small hoist

Features

- Bi-directionality is mechanically interlocked;
- IP65 Double insulation (IEC / EN 60529);
- Laser engraved symbols according to EN 60204-1, FEM 9.941;
- Shock proof and heat resistant;
- Available versions: for single or double speed motors and direct control 1 kW - 1 speed;
- Available with UL/CSA requirements;
- Available upon request also in V0 material, UL approved;
- Available in kit version.

Available codes

P03.1 Single speed					
P03.2 Single speed					
P03.3 Single speed					
P03CD Direct control / Single speed					
P03D2 Double speed					

Compliance and certifications

- EN 60947-1 (2007/A1 : 2011/A2 : 2014)
- EN 60947-5-1 (2004/A1 : 2009/AC : 2004/AC : 2005)
- EN ISO 13850 (2015)
- EN 60204-1 (2006/A1 : 2009)
- EN-ISO 13849-1 (2015)
- EN ISO 13849-2 (2012)
- EN 60529 (1991/A1 : 2000/A2 : 2013)
- EN 50581 (2012)
- IEC 63000 (2016)
- 2014/35/UE
- 2011/65/UE
- 2015/863/UE

General characteristics

Compliant to standards		IEC / EN60947-5-1
Material		ABS
Material Group		II
Pollution class		3
Temperature	operating storage	-25°C ... +70°C -30°C ... +70°C
Cable entry		rubber cable sleeve Ø 7 ... 18 mm

Electrical characteristics - Contact blocks

Marking		       (For contacts by direct control only CE certification is valid)	
Rated insulation voltage [Ui]		690 V *	
Rated impulse withstand voltage [Uimp]		4 kV *	
Frequency		50/60 Hz *	
Rated thermal current [Ith]		16 A *	
Rated thermal current in enclosure [Ithe]		10 A	
Rated operational current [Ie]			
AC-15 alternate current	type: PL0040..	24 V 16 A * 60 V 12 A 120 V 8 A 240 V 6 A 400 V 4.5 A 440 V 3.5 A 500 V 3 A * 690 V 1 A	
DC-13 direct current	type: PL0040..	24 V 2 A * 48 V 1.2 A 60 V 0.85 A 110 V 0.4 A 220 V 0.25 A *	
Conditional short circuit withstand current		1000 A *	
Fuses rating gC		10 A * - 500 V	
Contact insulation resistance		≤ 25 mΩ	
Switching mechanism	type: PL0040..	slow break double gap contacts	
Positive operation		NC contact blocks - positive opening	
Operating force		4 N	
Electric durability AC-15		1 A 1.5 millions of cycles 2 A 0.5 millions of cycles 3 A 0.25 millions of cycles	
Terminal type	type: PL0040..	M3.5 screw terminals	
Terminal capacity	type: PL0040..	N° 1 or 2 flexible and solid conductor 1 ... 2.5 mm²	
Climate resistance	IEC68 part 2-3 IEC68 part 2-30	damp heat, steady state damp heat, cyclic	

UL508 characteristics

Rated insulation voltage [Ui]		10 A - 600 V ac / 2.5 A - 125 V dc
Rated impulse withstand voltage [Uimp]		A600-Q600



* IMQ approved values

Available codes



P03.1 (P03.1N - black version)
P03.2
P03.3
P03CD

P03D2

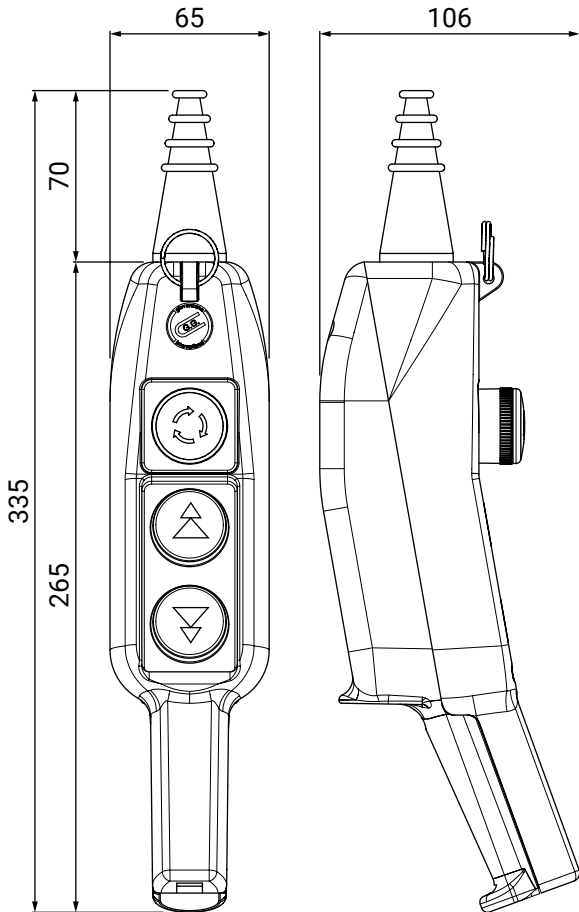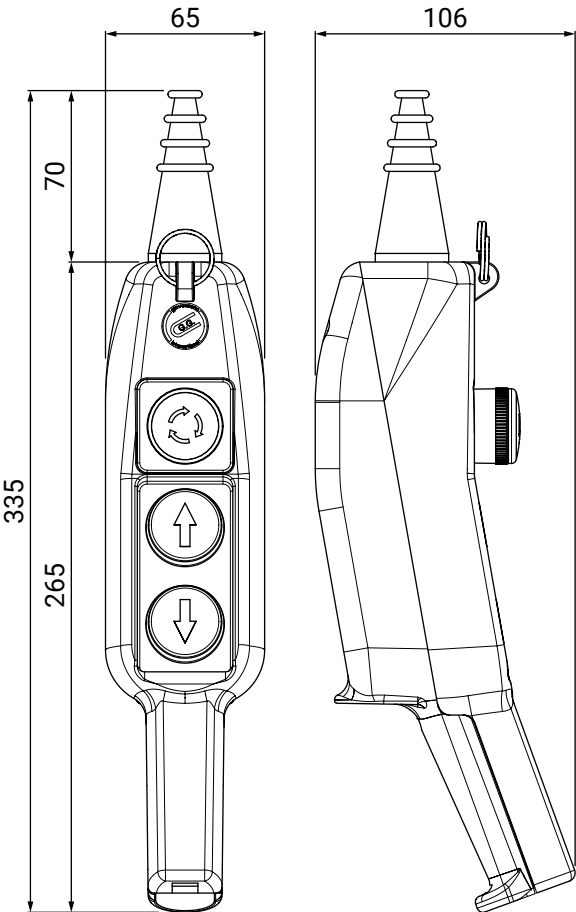

P03.1 P03.1N	Single speed		 	 	1 NC 1 NO 1 NO
P03.2	Single speed		 	 	1 NC 2 NO 2 NO
P03.3	Single speed		 	 	1 NC 3 NO 3 NO
P03CD	Direct control Single speed		 	 	2 NC + 1 NO 1 NC + 2 NO 1 NC + 2 NO
P03D2	Double speed		 	 	1 NC NO + NO NO + NO

CONTACT CODE

Single speed



1 NC

PL004001



1 NO

PL004002

Single speed
Direct control



1 NC

PL004001CD



1 NO


PL004002CD

Double speed



NO + NO

PL004010.S




Ergonomic pendant control station with three push buttons for hoist

Features

- Bi-directionality is mechanically interlocked;
- IP65 Double insulation (IEC / EN 60529);
- Laser engraved symbols according to EN 60204-1, FEM 9.941;
- Shock proof and heat resistant;
- Available versions: for single or double speed motors;
- Available with UL/CSA requirements.

Available codes

HP03 Single speed



Compliance and certifications

- EN 60947-1 (2007/A1 : 2011/A2 : 2014)
- EN 60947-5-1 (2004/A1 : 2009/AC : 2004/AC : 2005)
- EN ISO 13850 (2015)
- EN 60204-1 (2006/A1 : 2009)
- EN-ISO 13849-1 (2015)
- EN ISO 13849-2 (2012)
- EN 60529 (1991/A1 : 2000/A2 : 2013)
- EN 50581 (2012)
- IEC 63000 (2016)
- 2014/35/UE
- 2011/65/UE
- 2015/863/UE



General characteristics

Compliant to standards		IEC / EN60947-5-1
Material		ABS V0
Material Group		II
Pollution class		3
Temperature	operating storage	-25°C ... +70°C -30°C ... +70°C
Cable entry		Spiral cable gland M20

Electrical characteristics - Contact blocks

Marking			
Rated insulation voltage [Ui]		690 V *	
Rated impulse withstand voltage [Uimp]		4 kV *	
Frequency		50/60 Hz *	
Rated thermal current [Ith]		16 A *	
Rated thermal current in enclosure [Ithe]		10 A	
Rated operational current [Ie]			
AC-15 alternate current	type: PCW..	24 V	16 A *
		60 V	12 A
		110 V	5 A
		240 V	5 A *
		400 V	4 A
		440 V	4 A
		500 V	4 A *
		690 V	2 A
DC-13 direct current	type: PCW..	24 V	2 A
		48 V	2 A *
		60 V	1 A *
		110 V	0.4 A
		250 V	0.4 A *
Minimum constant current		1 mA@5Vdc, 1 mA@24Vdc	
Conditional short circuit withstand current		1000 A *	
Fuses rating gC		10 A * - 500 V	
Contact insulation resistance		≤ 25 mΩ	
Switching mechanism	type: PCW..	slow break double gap contacts	
Positive operation		NC contact blocks - positive opening	
Operating force		4 N	
Electric durability AC-15		1 A	1.5 millions of cycles
		2 A	0.5 millions of cycles
		3 A	0.25 millions of cycles
Terminal type	type: PCW..	M3.5 screw terminals	
Terminal capacity	type: PCW..	N° 1 or 2 flexible and solid conductor 1 ... 2.5 mm²	
Climate resistance	IEC68 part 2-3 IEC68 part 2-30	damp heat, steady state	
		damp heat, cyclic	

UL508 characteristics

Rated insulation voltage [Ui]		10 A - 600 V ac / 2.5 A - 125 V dc
Rated impulse withstand voltage [Uimp]		A600-Q600

* IMQ approved values



Available codes



HP03



HP03.D2

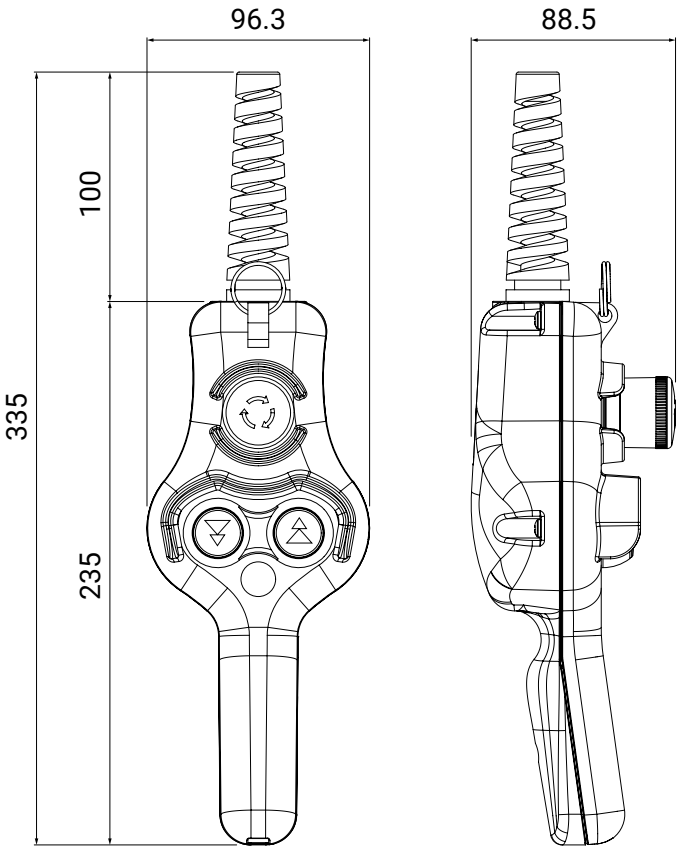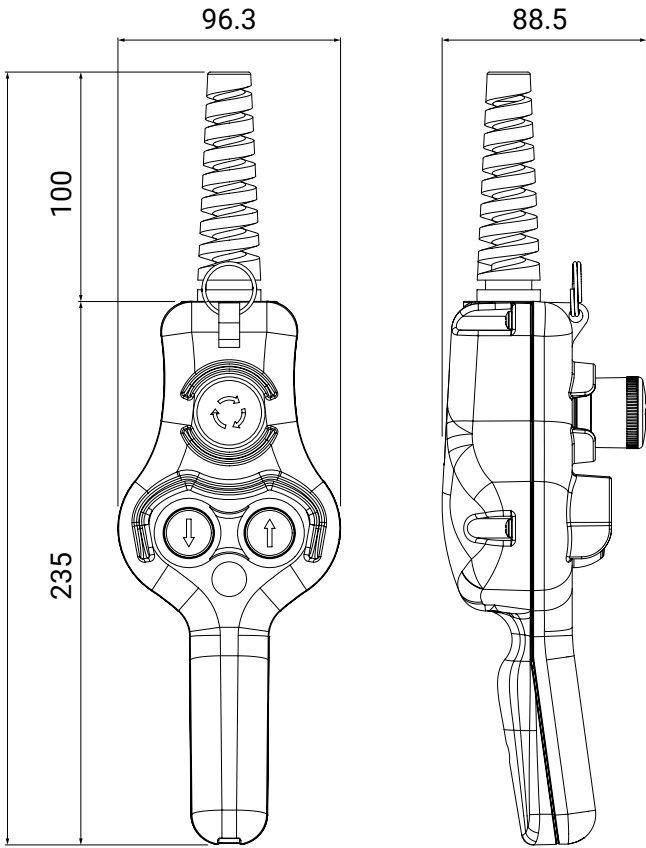

Standard versions

PRODUCT CODE	FUNCTION	LAYOUT	PUSH BUTTON	CONTACT CONFIGURATION	
HP03	Single speed				1 NC
					1 NO
					1 NO
HP03.D2	Double speed				1 NC
					NO + NO
					NO + NO

PENDANT
STATIONS

CONTACT CODE

Single speed



1 NC

PCW01



1 NO


PCW10

Double speed



NO + NO

PCWDS



HOIST

Ergonomic pendant control station with five push buttons for hoist

Features

- Bi-directionality is mechanically interlocked;
- IP65 Double insulation (IEC / EN 60529);
- Laser engraved symbols according to EN 60204-1, FEM 9.941;
- Shock proof and heat resistant;
- Available versions: for single or double speed motors;
- Available with UL/CSA requirements.

Available codes

HP05 Single speed	NC	NO	NO	NO	NO				
HP05.D2 Single/Double speed	NC			NO	NO	NO+NO	NO+NO		
HP05.D4 Double speed	NC					NO+NO	NO+NO	NO+NO	NO+NO

Compliance and certifications

- EN 60947-1 (2007/A1 : 2011/A2 : 2014)
- EN 60947-5-1 (2004/A1 : 2009/AC : 2004/AC : 2005)
- EN ISO 13850 (2015)
- EN 60204-1 (2006/A1 : 2009)
- EN-ISO 13849-1 (2015)
- EN ISO 13849-2 (2012)
- EN 60529 (1991/A1 : 2000/A2 : 2013)
- EN 50581 (2012)
- IEC 63000 (2016)
- 2014/35/UE
- 2011/65/UE
- 2015/863/UE



General characteristics

Compliant to standards		IEC / EN60947-5-1
Material		ABS V0
Material Group		II
Pollution class		3
Temperature	operating storage	-25°C ... +70°C -30°C ... +70°C
Cable entry		Cable gland M25

Electrical characteristics - Contact blocks

Marking			
Rated insulation voltage [Ui]		690 V *	
Rated impulse withstand voltage [Uimp]		4 kV *	
Frequency		50/60 Hz *	
Rated thermal current [Ith]		16 A *	
Rated thermal current in enclosure [Ithe]		10 A	
Rated operational current [Ie]			
AC-15 alternate current	type: PCW..	24 V	16 A *
		60 V	12 A
		110 V	5 A
		240 V	5 A *
		400 V	4 A
		440 V	4 A
		500 V	4 A *
		690 V	2 A
DC-13 direct current	type: PCW..	24 V	2 A
		48 V	2 A *
		60 V	1 A *
		110 V	0.4 A
		250 V	0.4 A *
Minimum constant current		1 mA@5Vdc, 1 mA@24Vdc	
Conditional short circuit withstand current		1000 A *	
Fuses rating gC		10 A * - 500 V	
Contact insulation resistance		≤ 25 mΩ	
Switching mechanism	type: PCW..	slow break double gap contacts	
Positive operation		NC contact blocks - positive opening	
Operating force		4 N	
Electric durability AC-15		1 A 1.5 millions of cycles 2 A 0.5 millions of cycles 3 A 0.25 millions of cycles	
Terminal type	type: PCW..	M3.5 screw terminals	
Terminal capacity	type: PCW..	N° 1 or 2 flexible and solid conductor 1 ... 2.5 mm²	
Climate resistance	IEC68 part 2-3 IEC68 part 2-30	damp heat, steady state damp heat, cyclic	

UL508 characteristics

Rated insulation voltage [Ui]		10 A - 600 V ac / 2.5 A - 125 V dc
Rated impulse withstand voltage [Uimp]		A600-Q600

* IMQ approved values


Available codes



HP05

HP05.D2

HP05.D4

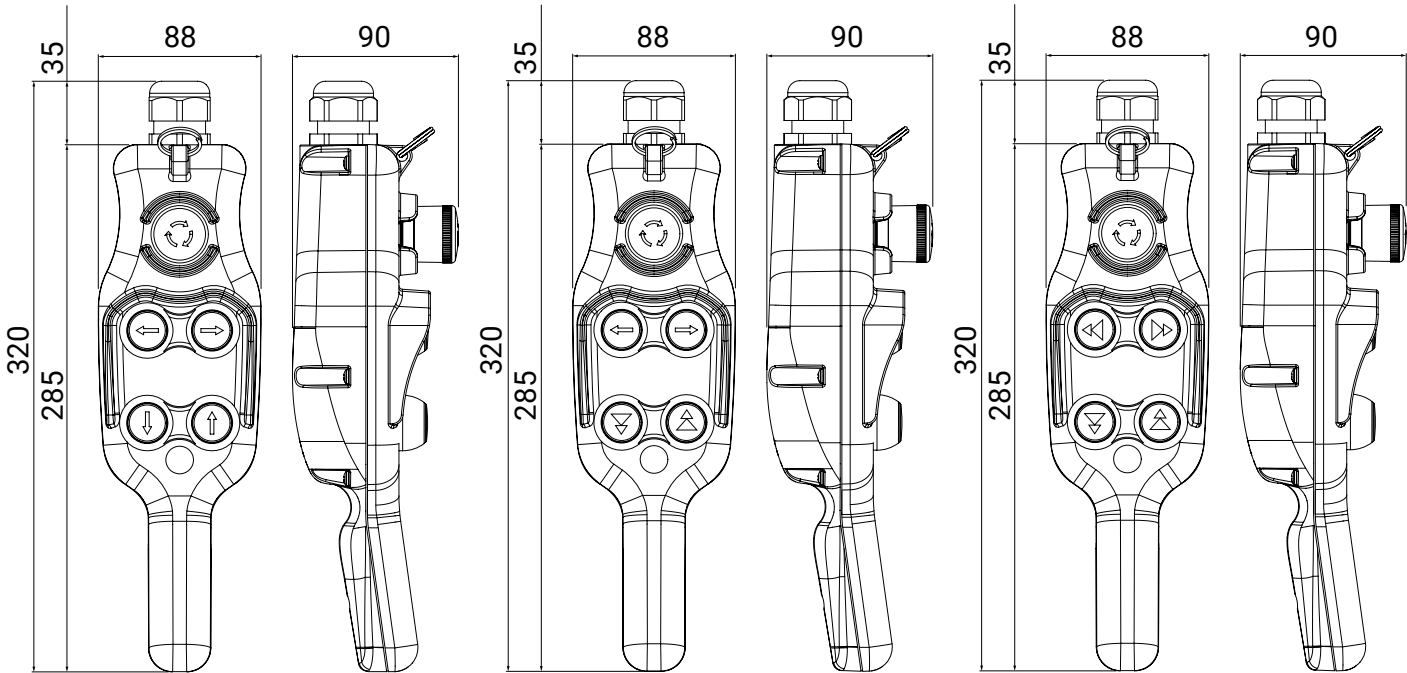

Standard versions

PRODUCT CODE	FUNCTION	LAYOUT	PUSH BUTTON	CONTACT CONFIGURATION	
HP05	Single speed				1 NC
					1 NO
					1 NO
					1 NO
					1 NO
HP05.D2	Single/Double speed				1 NC
					1 NO
					1 NO
					NO + NO
					NO + NO
HP05.D4	Double speed				1 NC
					NO + NO
					NO + NO
					NO + NO
					NO + NO

CONTACT CODE

Single speed



1 NC

PCW01



1 NO


PCW10

Double speed



NO + NO

PCWDS

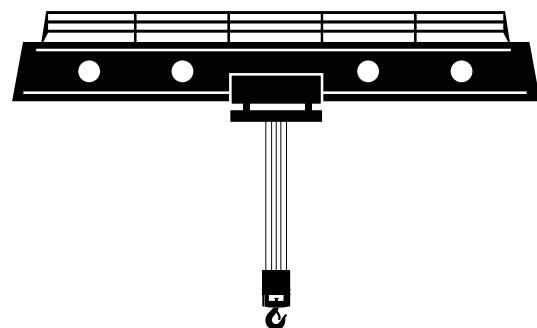

CRANE

Ergonomic pendant control station with seven push buttons for crane

Features

- Bi-directionality is mechanically interlocked;
- IP65 Double insulation (IEC / EN 60529);
- Laser engraved symbols according to EN 60204-1, FEM 9.941;
- Shock proof and heat resistant;
- Available versions: for single or double speed motors;
- Available with UL/CSA requirements.

Available codes

HP07 Single speed	NC	NO	NO	NO	NO	NO	NO						
HP07.D2 Single/ double speed	NC	NO	NO			NO	NO			NO+NO	NO+NO		
HP07.D4 Single/ double speed	NC	NO	NO							NO+NO	NO+NO	NO+NO	NO+NO
HP07.D6 Double speed	NC									NO+NO	NO+NO	NO+NO	NO+NO

Compliance and certifications

- EN 60947-1 (2007/A1 : 2011/A2 : 2014)
- EN 60947-5-1 (2004/A1 : 2009/AC : 2004/AC : 2005)
- EN ISO 13850 (2015)
- EN 60204-1 (2006/A1 : 2009)
- EN-ISO 13849-1 (2015)
- EN ISO 13849-2 (2012)
- EN 60529 (1991/A1 : 2000/A2 : 2013)
- EN 50581 (2012)
- IEC 63000 (2016)
- 2014/35/UE
- 2011/65/UE
- 2015/863/UE

General characteristics

Compliant to standards		IEC / EN60947-5-1
Material		ABS V0
Material Group		II
Pollution class		3
Temperature	operating storage	-25°C ... +70°C -30°C ... +70°C
Cable entry		Cable gland M25

Electrical characteristics - Contact blocks

Marking		     	
Rated insulation voltage [Ui]		690 V *	
Rated impulse withstand voltage [Uimp]		4 kV *	
Frequency		50/60 Hz *	
Rated thermal current [Ith]		16 A *	
Rated thermal current in enclosure [Ithe]		10 A	
Rated operational current [Ie]			
AC-15 alternate current	type: PCW..	24 V 60 V 110 V 240 V 400 V 440 V 500 V 690 V	16 A * 12 A 5 A 5 A * 4 A 4 A 4 A * 2 A
DC-13 direct current	type: PCW..	24 V 48 V 60 V 110 V 250 V	2 A 2 A * 1 A * 0.4 A 0.4 A *
Minimum constant current		1 mA@5Vdc, 1 mA@24Vdc	
Conditional short circuit withstand current		1000 A *	
Fuses rating gC		10 A * - 500 V	
Contact insulation resistance		≤ 25 mΩ	
Switching mechanism	type: PCW..	slow break double gap contacts	
Positive operation		NC contact blocks - positive opening	
Operating force		4 N	
Electric durability AC-15		1 A 1.5 millions of cycles 2 A 0.5 millions of cycles 3 A 0.25 millions of cycles	
Terminal type	type: PCW..	M3.5 screw terminals	
Terminal capacity	type: PCW..	N° 1 or 2 flexible and solid conductor 1 ... 2.5 mm²	
Climate resistance	IEC68 part 2-3 IEC68 part 2-30	damp heat, steady state damp heat, cyclic	

UL508 characteristics

Rated insulation voltage [Ui]		10 A - 600 V ac / 2.5 A - 125 V dc
Rated impulse withstand voltage [Uimp]		A600-Q600

* IMQ approved values



Available codes



HP07



HP07.D2

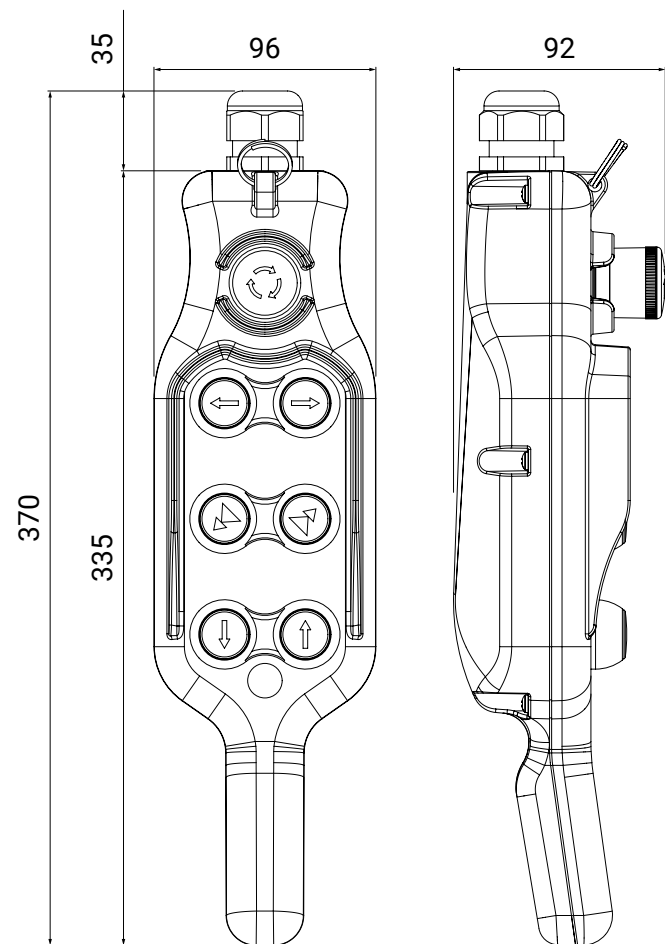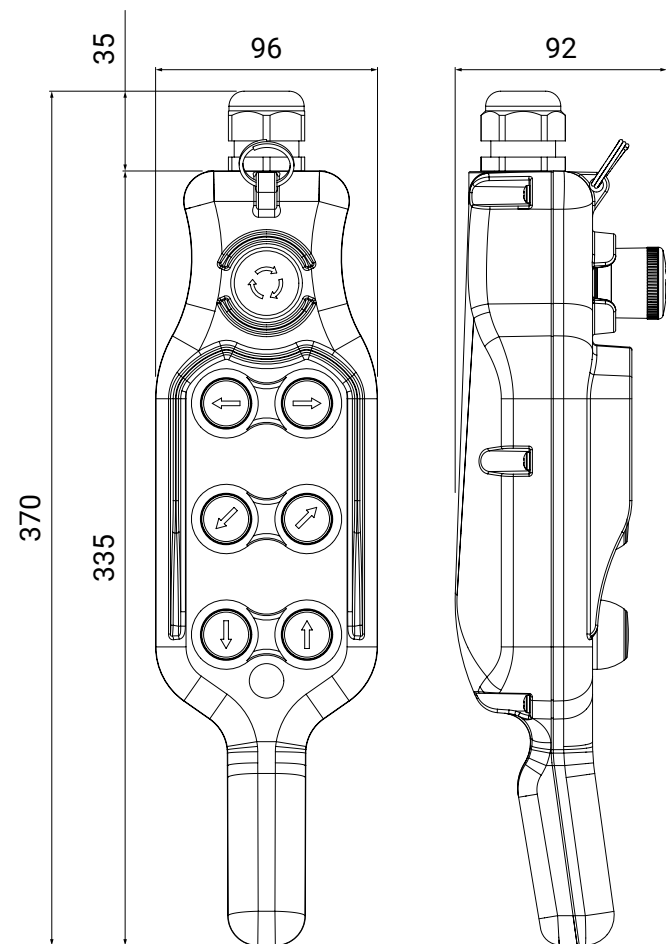



Available codes



HP07.D4



HP07.D6

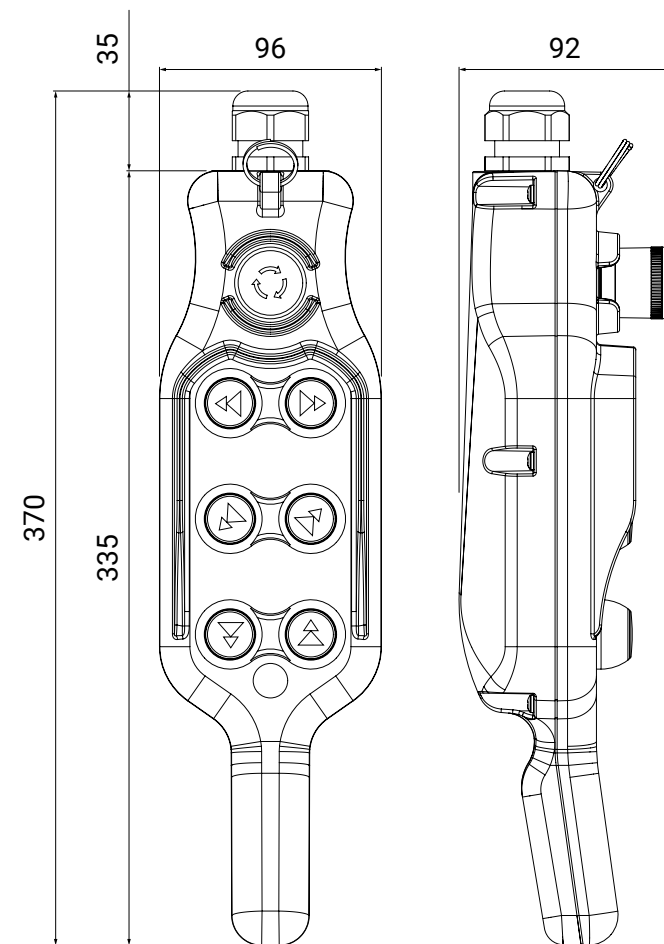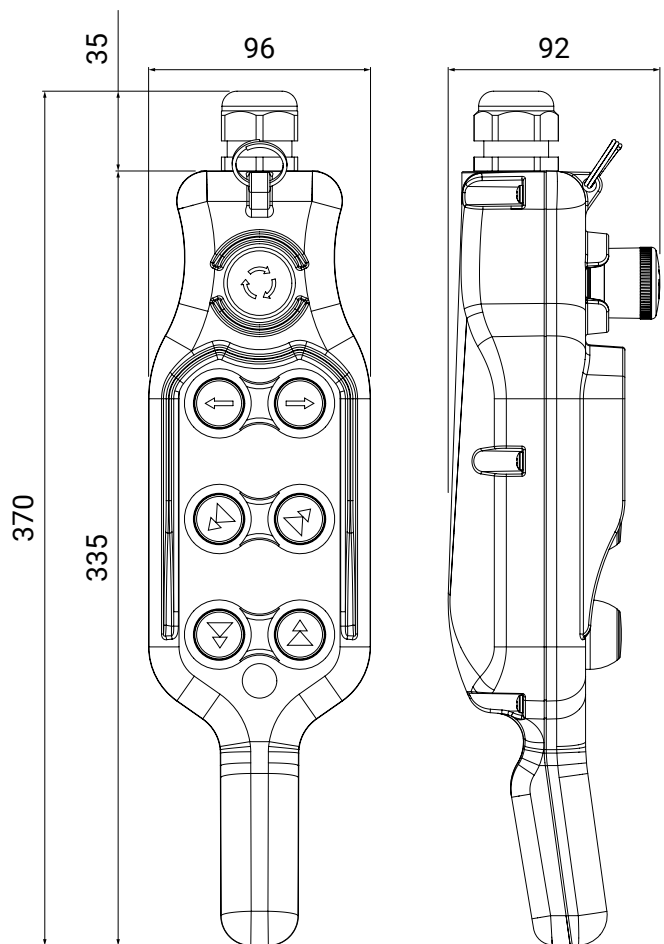


Standard versions

PRODUCT CODE	FUNCTION	LAYOUT	PUSH BUTTON	CONTACT CONFIGURATION		CONTACT CODE
HP07	Single speed				1 NC	Single speed  1 NC PCW01  1 NO PCW10 Double speed  NO + NO PCWDS
					1 NO	
					1 NO	
					1 NO	
					1 NO	
					1 NO	
					1 NO	
HP07.D2	Single/Double speed				1 NC	Single speed  1 NC PCW01  1 NO PCW10 Double speed  NO + NO PCWDS
					1 NO	
					1 NO	
					NO + NO	
					NO + NO	
					1 NO	
					1 NO	

Standard versions

PRODUCT CODE	FUNCTION	LAYOUT	PUSH BUTTON	CONTACT CONFIGURATION		CONTACT CODE
HP07.D4	Single/Double speed				1 NC	Single speed  1 NC PCW01  1 NO PCW10 Double speed  NO + NO PCWDS
					1 NO	
					1 NO	
					NO + NO	
					NO + NO	
					NO + NO	
					NO + NO	
HP07.D6	Double speed				1 NC	Single speed  1 NC PCW01  1 NO PCW10 Double speed  NO + NO PCWDS
					NO + NO	
					NO + NO	
					NO + NO	
					NO + NO	
					NO + NO	
					NO + NO	

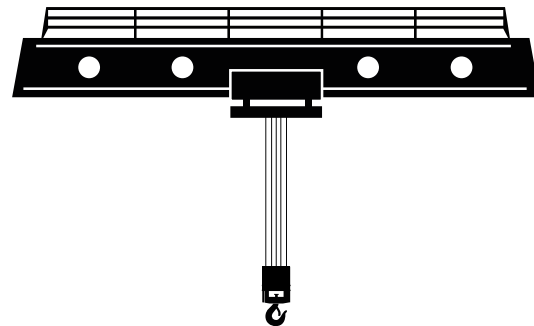

CRANE

Ergonomic pendant control station with eight holes for crane

Features

- Bi-directionality is mechanically interlocked;
- IP65 Double insulation (IEC / EN 60529);
- Laser engraved symbols according to EN 60204-1, FEM 9.941;
- Shock proof and heat resistant;
- Available versions: for single or double speed engines;
- Available with UL/CSA requirements.

Available codes

HP08 Single speed	NC	NO	NO	NO	NO	NO	NO	NO						
HP08.D2 Single/double speed	NC	NO	NO	NO			NO	NO			NO+NO	NO+NO		
HP08.D4 Single/double speed	NC	NO	NO	NO							NO+NO	NO+NO	NO+NO	NO+NO
HP08.D6 Double speed	NC	NO									NO+NO	NO+NO	NO+NO	NO+NO

Compliance and certifications

- EN 60947-1 (2007/A1 : 2011/A2 : 2014)
- EN 60947-5-1 (2004/A1 : 2009/AC : 2004/AC : 2005)
- EN ISO 13850 (2015)
- EN 60204-1 (2006/A1 : 2009)
- EN-ISO 13849-1 (2015)
- EN ISO 13849-2 (2012)
- EN 50581 (2012)
- IEC 63000 (2016)
- 2014/35/UE
- 2011/65/UE
- 2015/863/UE

General characteristics

Compliant to standards		IEC / EN60947-5-1
Material		ABS V0
Material Group		II
Pollution class		3
Temperature	operating storage	-25°C ... +70°C -30°C ... +70°C
Cable entry		Cable gland M32

Electrical characteristics - Contact blocks

Marking			
Rated insulation voltage [Ui]		690 V *	
Rated impulse withstand voltage [Uimp]		4 kV *	
Frequency		50/60 Hz *	
Rated thermal current [Ith]		16 A *	
Rated thermal current in enclosure [Ithe]		10 A	
Rated operational current [Ie]			
AC-15 alternate current	type: PCW..	24 V	16 A *
		60 V	12 A
		110 V	5 A
		240 V	5 A *
		400 V	4 A
		440 V	4 A
		500 V	4 A *
		690 V	2 A
DC-13 direct current	type: PCW..	24 V	2 A
		48 V	2 A *
		60 V	1 A *
		110 V	0.4 A
		250 V	0.4 A *
Minimum constant current		1 mA@5Vdc, 1 mA@24Vdc	
Conditional short circuit withstand current		1000 A *	
Fuses rating gC		10 A * - 500 V	
Contact insulation resistance		≤ 25 mΩ	
Switching mechanism	type: PCW..	slow break double gap contacts	
Positive operation		NC contact blocks - positive opening	
Operating force		4 N	
Electric durability AC-15		1 A 1.5 millions of cycles 2 A 0.5 millions of cycles 3 A 0.25 millions of cycles	
Terminal type	type: PCW..	M3.5 screw terminals	
Terminal capacity	type: PCW..	N° 1 or 2 flexible and solid conductor 1 ... 2.5 mm²	
Climate resistance	IEC68 part 2-3 IEC68 part 2-30	damp heat, steady state damp heat, cyclic	

UL508 characteristics

Rated insulation voltage [Ui]		10 A - 600 V ac / 2.5 A - 125 V dc
Rated impulse withstand voltage [Uimp]		A600-Q600



* IMQ approved values

Available codes



HP08

HP08.D2

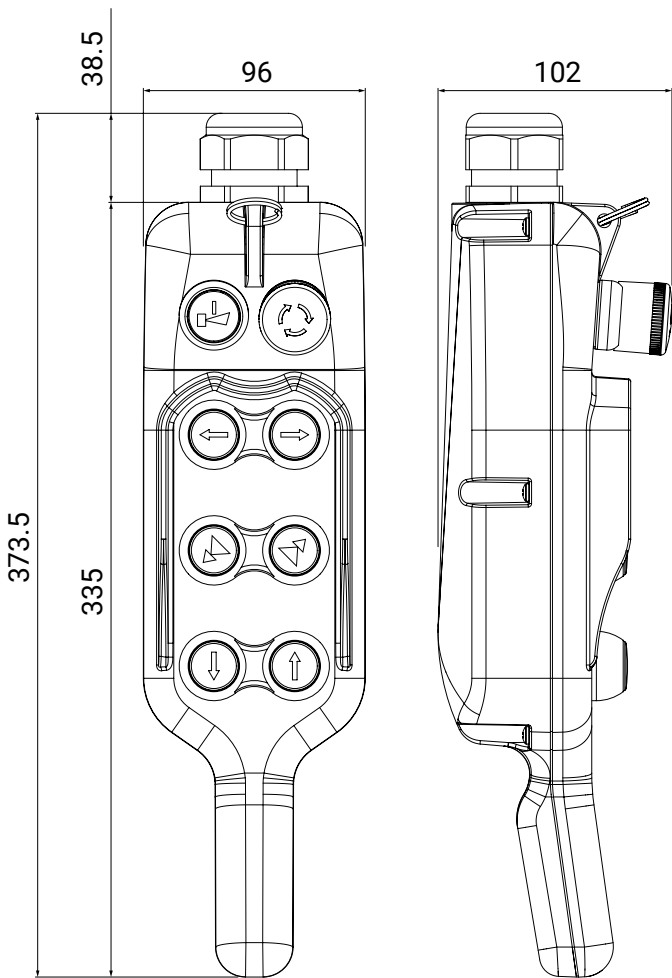
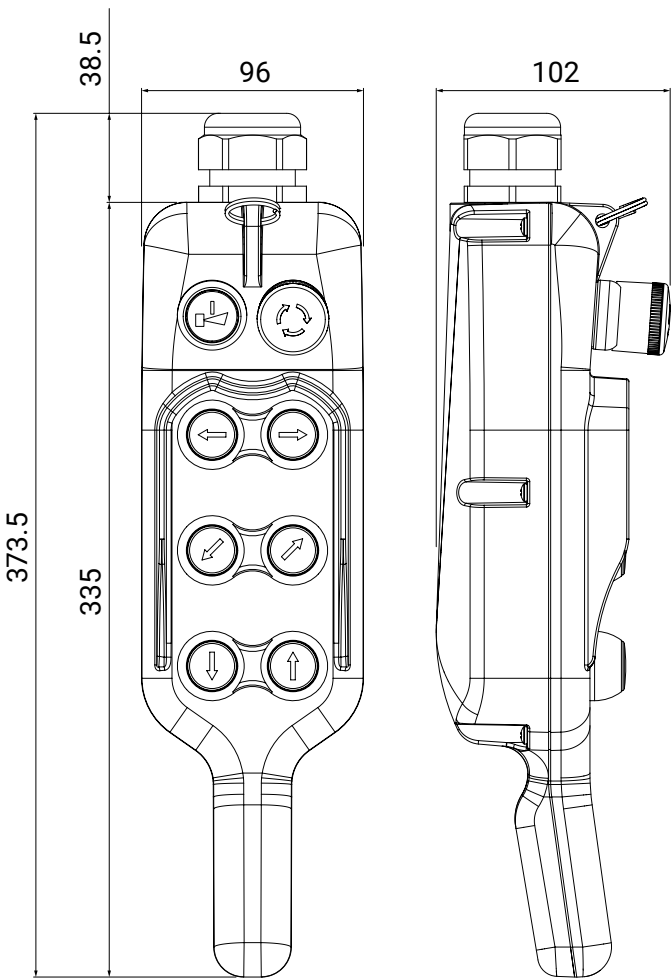


Available codes



HP08.D4

HP08.D6

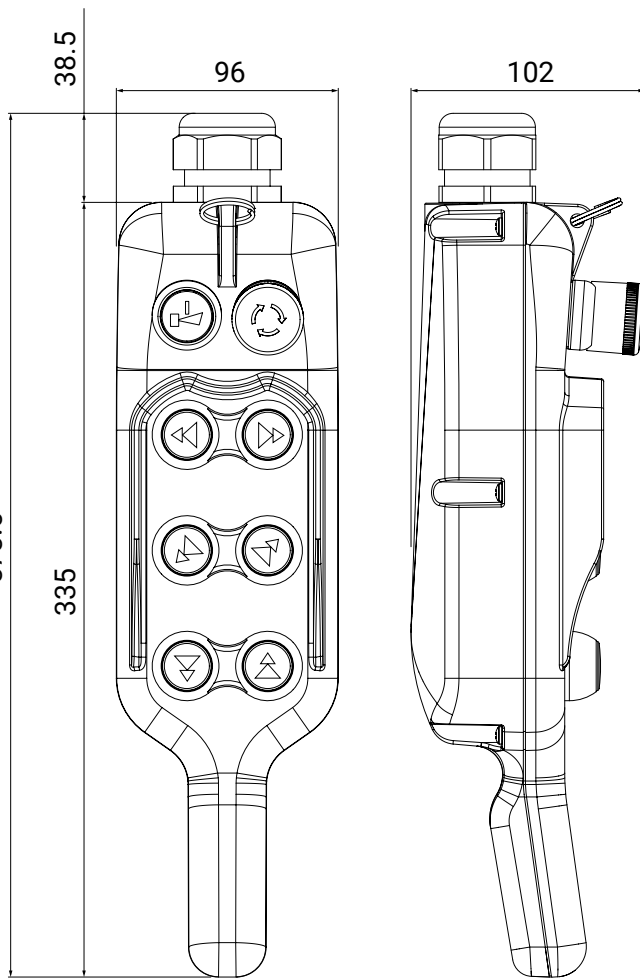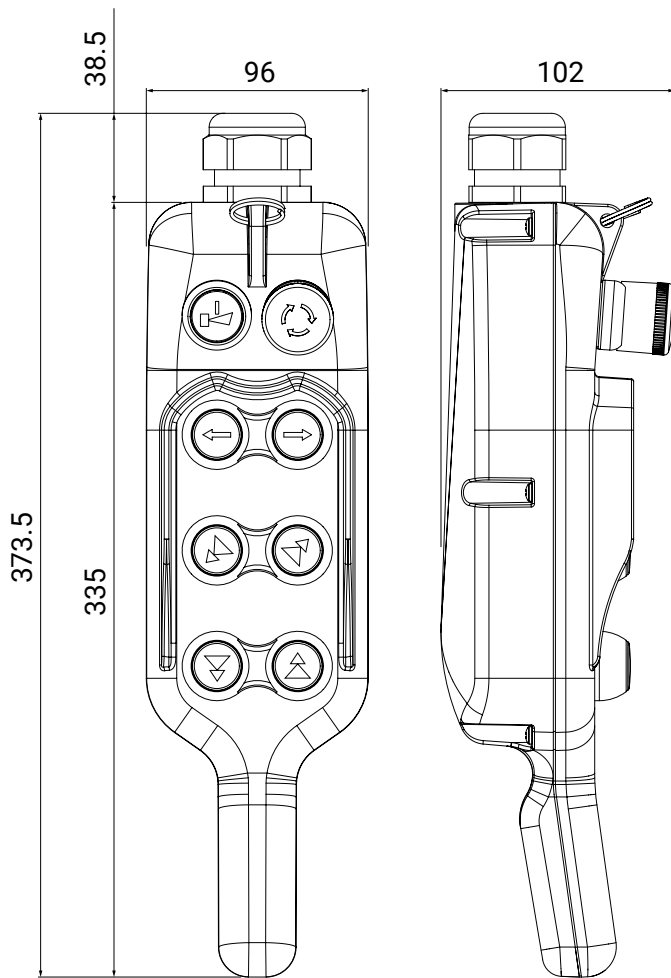


PRODUCT CODE	FUNCTION	LAYOUT	PUSH BUTTON	CONTACT CONFIGURATION	
HP08	Single speed				2 NO
					1 NC
					1 NO
					1 NO
					1 NO
					1 NO
					1 NO
					1 NO
HP08.D2	Single/Double speed				2 NO
					1 NC
					1 NO
					1 NO
					NO + NO
					NO + NO
					1 NO
					1 NO

CONTACT CODE
Single speed
 1 NC
PCW01
 1 NO
PCW10
Double speed
 NO + NO
PCWDS

PRODUCT CODE	FUNCTION	LAYOUT	PUSH BUTTON	CONTACT CONFIGURATION	
HP08.D4	Single/Double speed				2 NO
					1 NC
					1 NO
					1 NO
					NO + NO
					NO + NO
					NO + NO
					NO + NO
HP08.D6	Double speed				2 NO
					1 NC
					NO + NO
					NO + NO
					NO + NO
					NO + NO
					NO + NO
					NO + NO

CONTACT CODE
Single speed
 1 NC
PCW01
 1 NO
PCW10
Double speed
 NO + NO
PCWDS

Single row pendant control station
from 5 to 12 push buttons for crane

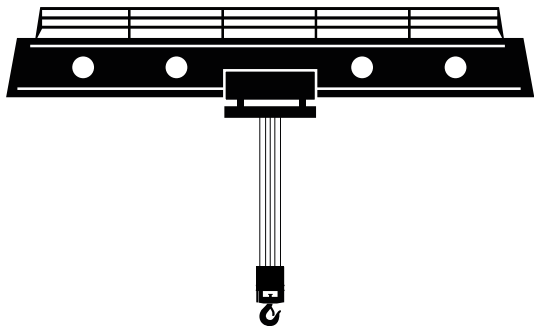

CRANE



5 PUSH BUTTONS

7 PUSH BUTTONS

8 PUSH BUTTONS

10 PUSH BUTTONS

12 PUSH BUTTONS

- Shock proof and heat resistant;
- Available versions: for single or double speed motors;
- Available with UL/CSA requirements, upon request also in V0 material, UL approved;
- Available in kit version (with PLN or PL laser engraved push buttons).

Available codes

PLN05 Single speed																		
PLN05D2 Single/double speed																		
PLN05D4 Double speed																		
PLN07 Single speed																		
PLN07D2 Single/double speed																		
PLN07D4 Single/double speed																		
PLN07D6 Double speed																		
PLN08 Single speed																		
PLN08D2 Single/double speed																		
PLN08D4 Single/double speed																		
PLN08D6 Double speed																		
PLN10 Single/double speed																		
PLN12 Single/double speed																		

Compliance and certifications

- EN 60947-1 (2007/A1 : 2011/A2 : 2014)
- EN 60947-5-1 (2004/A1 : 2009/AC : 2004/AC : 2005)
- EN ISO 13850 (2015)
- EN 60204-1 (2006/A1 : 2009)
- EN-ISO 13849-1 (2015)
- EN ISO 13849-2 (2012)
- EN 60529 (1991/A1 : 2000/A2 : 2013)
- EN 50581 (2012)
- IEC 63000 (2016)
- 2014/35/UE
- 2011/65/UE
- 2015/863/UE

Technical data

General characteristics		
Compliant to standards		IEC / EN60947-5-1
Material		ABS
Material Group		II
Pollution class		3
Temperature	operating storage	-25°C ... +70°C -30°C ... +70°C
Cable entry		rubber cable sleeve Ø 9 ... 24 mm

Electrical characteristics - Contact blocks		
Marking		
Rated insulation voltage [Ui]		690 V *
Rated impulse withstand voltage [Uimp]		4 kV *
Frequency		50/60 Hz *
Rated thermal current [Ith]		16 A *
Rated thermal current in enclosure [Ithe]		10 A
Rated operational current [Ie]		
AC-15 alternate current	type: PL0040..	24 V 16 A * 60 V 12 A 120 V 8 A 240 V 6 A 400 V 4.5 A 440 V 3.5 A 500 V 3 A * 690 V 1 A
DC-13 direct current	type: PL0040..	24 V 2 A * 48 V 1.2 A 60 V 0.85 A 110 V 0.4 A 220 V 0.25 A *
Conditional short circuit withstand current		1000 A *
Fuses rating gC		10 A * - 500 V
Contact insulation resistance		≤ 25 mΩ
Switching mechanism	type: PL0040..	slow break double gap contacts
Positive operation		NC contact blocks - positive opening
Operating force		4 N
Electric durability AC-15		1 A 1.5 millions of cycles 2 A 0.5 millions of cycles 3 A 0.25 millions of cycles
Terminal type	type: PL0040..	M3.5 screw terminals
Terminal capacity	type: PL0040..	N° 1 or 2 flexible and solid conductor 1 ... 2.5 mm²
Climate resistance	IEC68 part 2-3 IEC68 part 2-30	damp heat, steady state damp heat, cyclic

UL508 characteristics		
Rated insulation voltage [Ui]		10 A - 600 V ac / 2.5 A - 125 V dc
Rated impulse withstand voltage [Uimp]		A600-Q600

* IMQ approved values

Available codes






PLN05



PLN05D2



PLN05D4

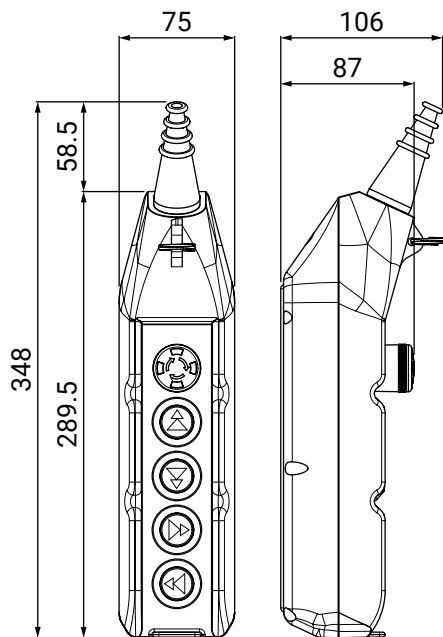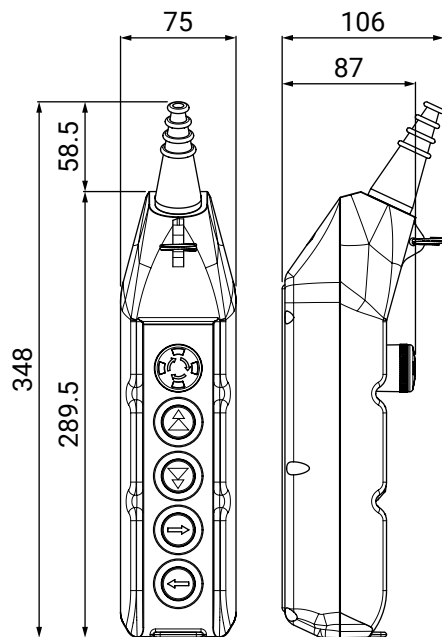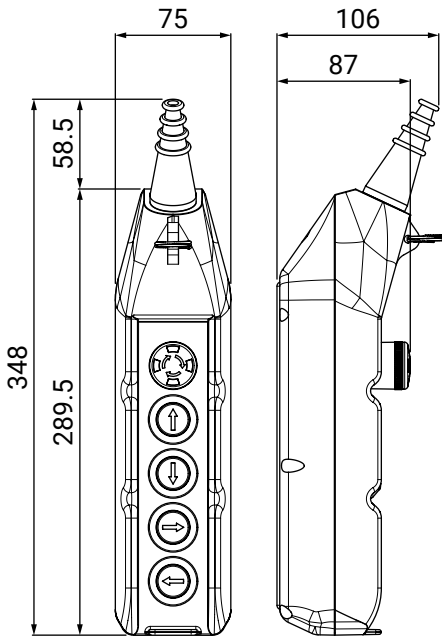

Available codes



PLN07







PLN07D2



PLN07D4



PLN07D6

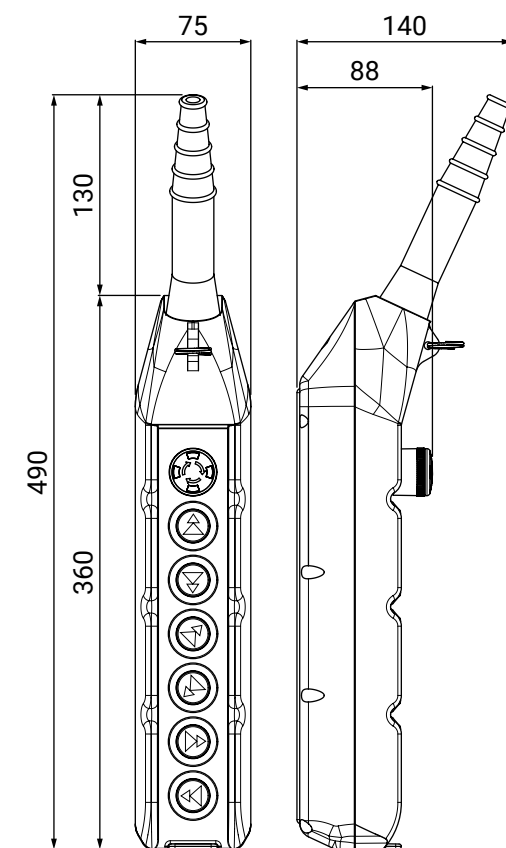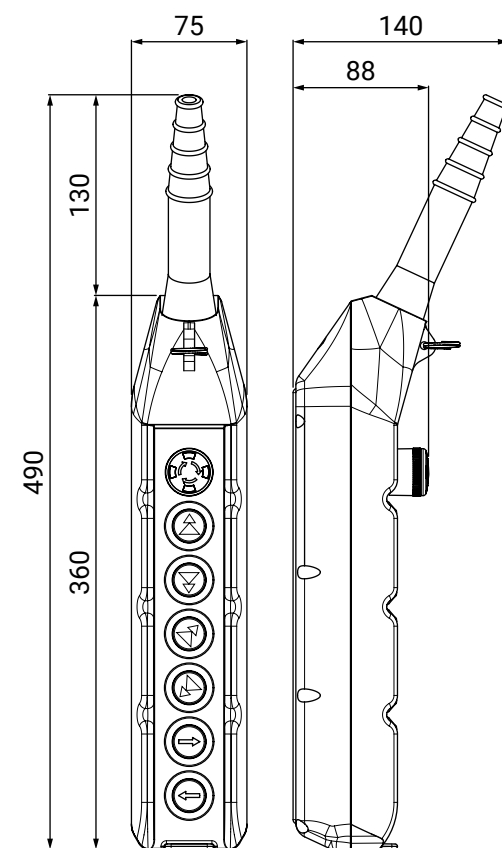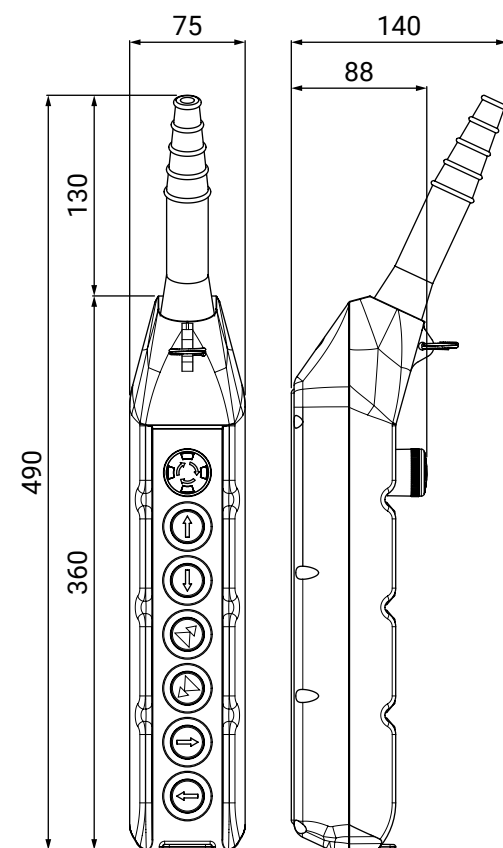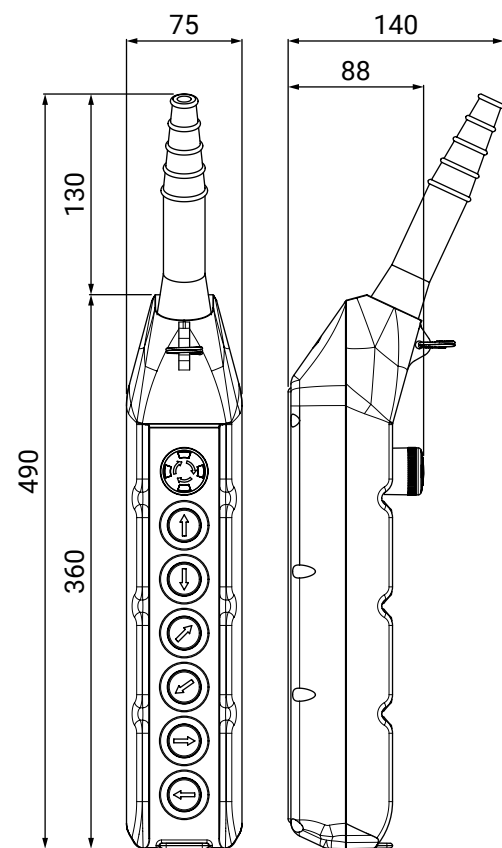

Available codes



PLN08







PLN08D2



PLN08D4



PLN08D6

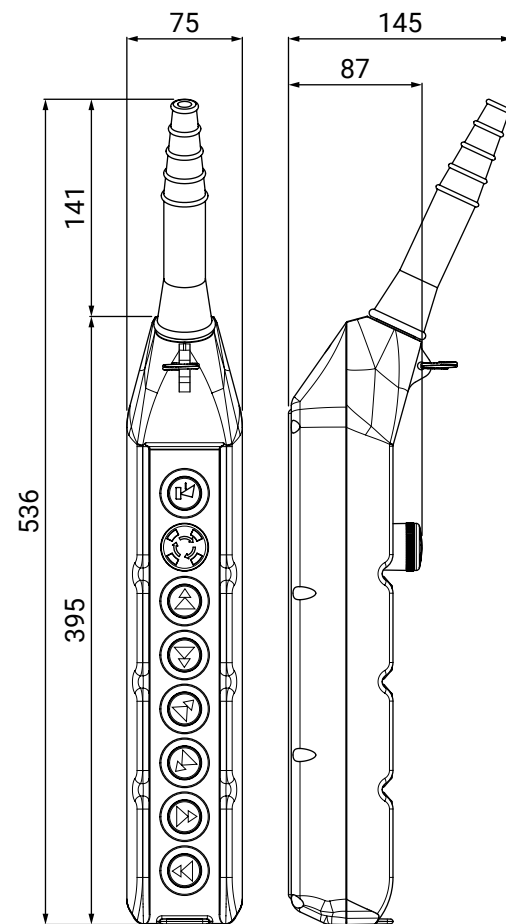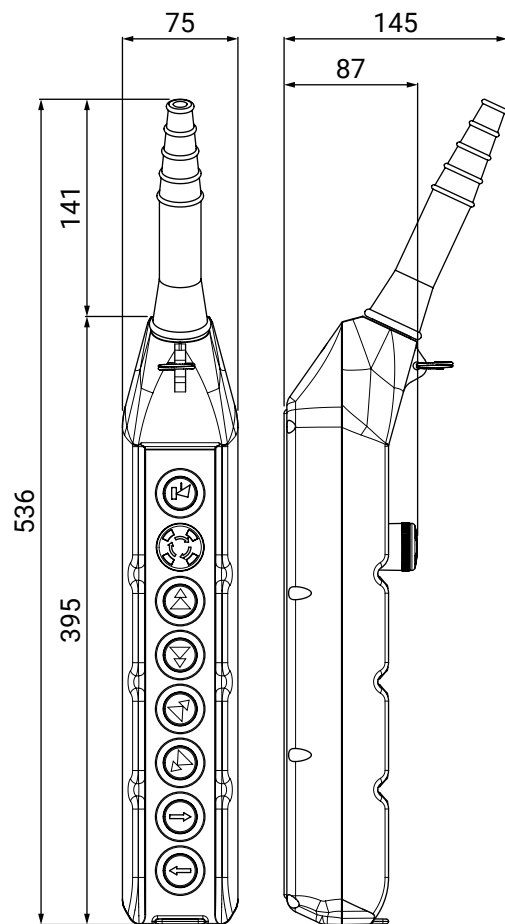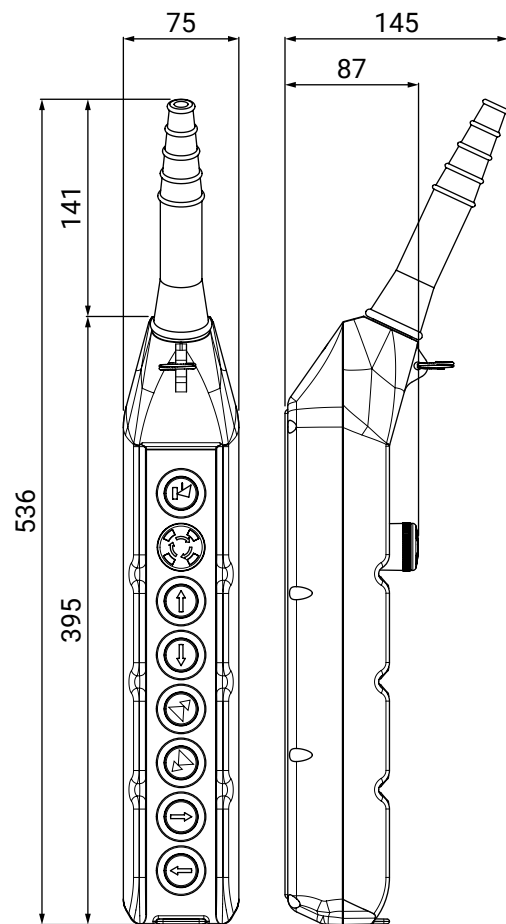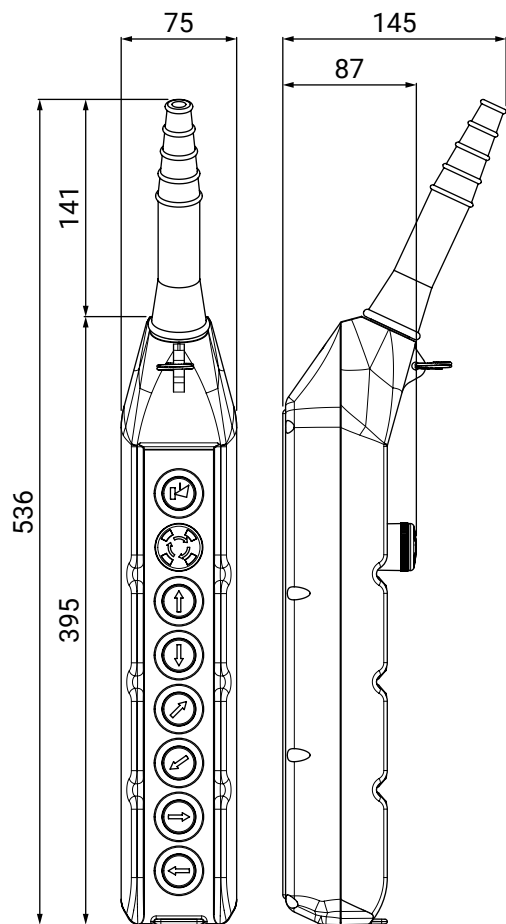


Available codes

Available codes




PLN10


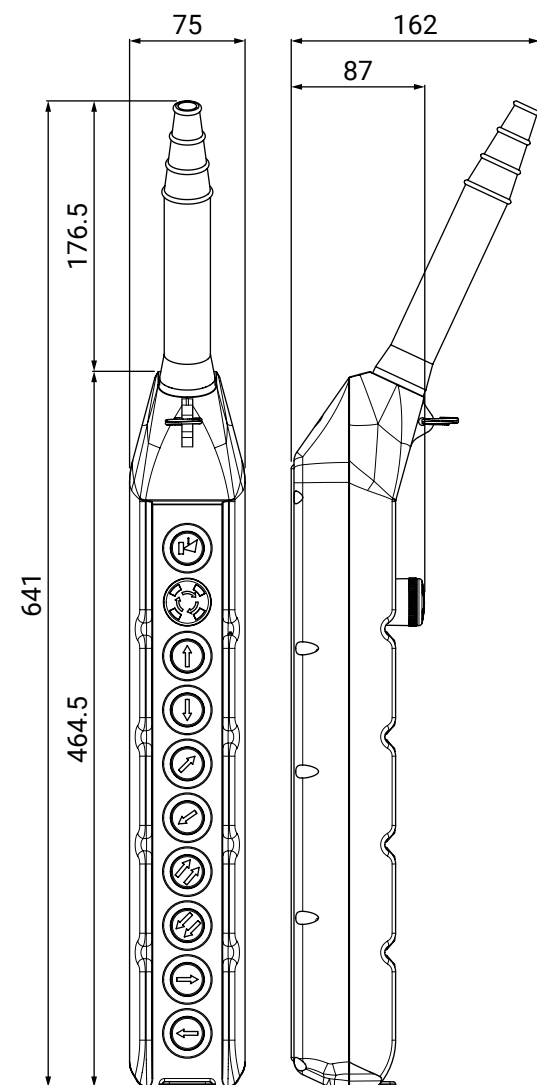


Available codes



PLN12

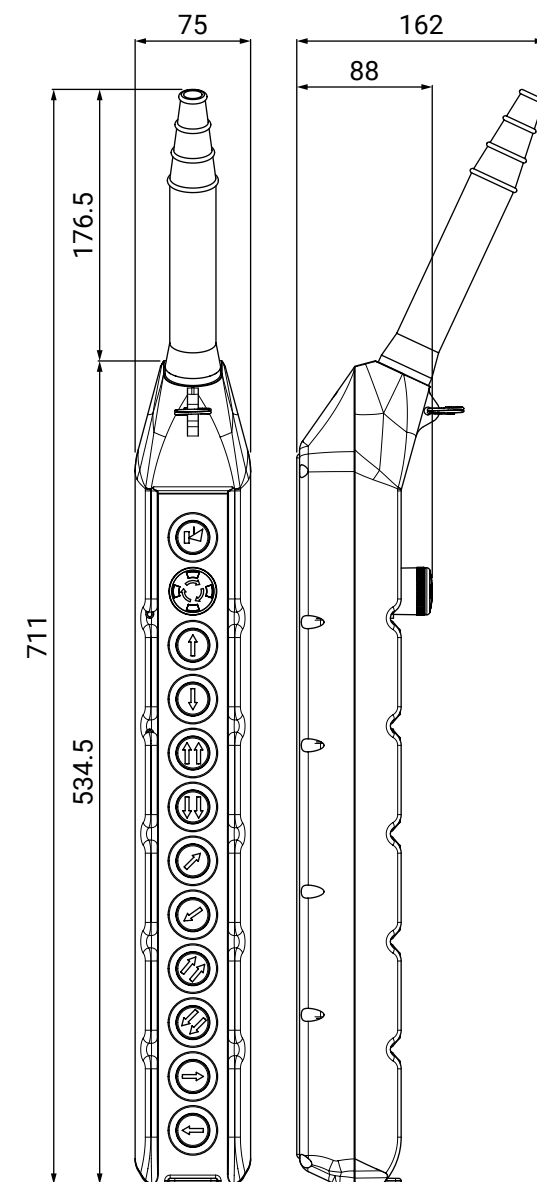

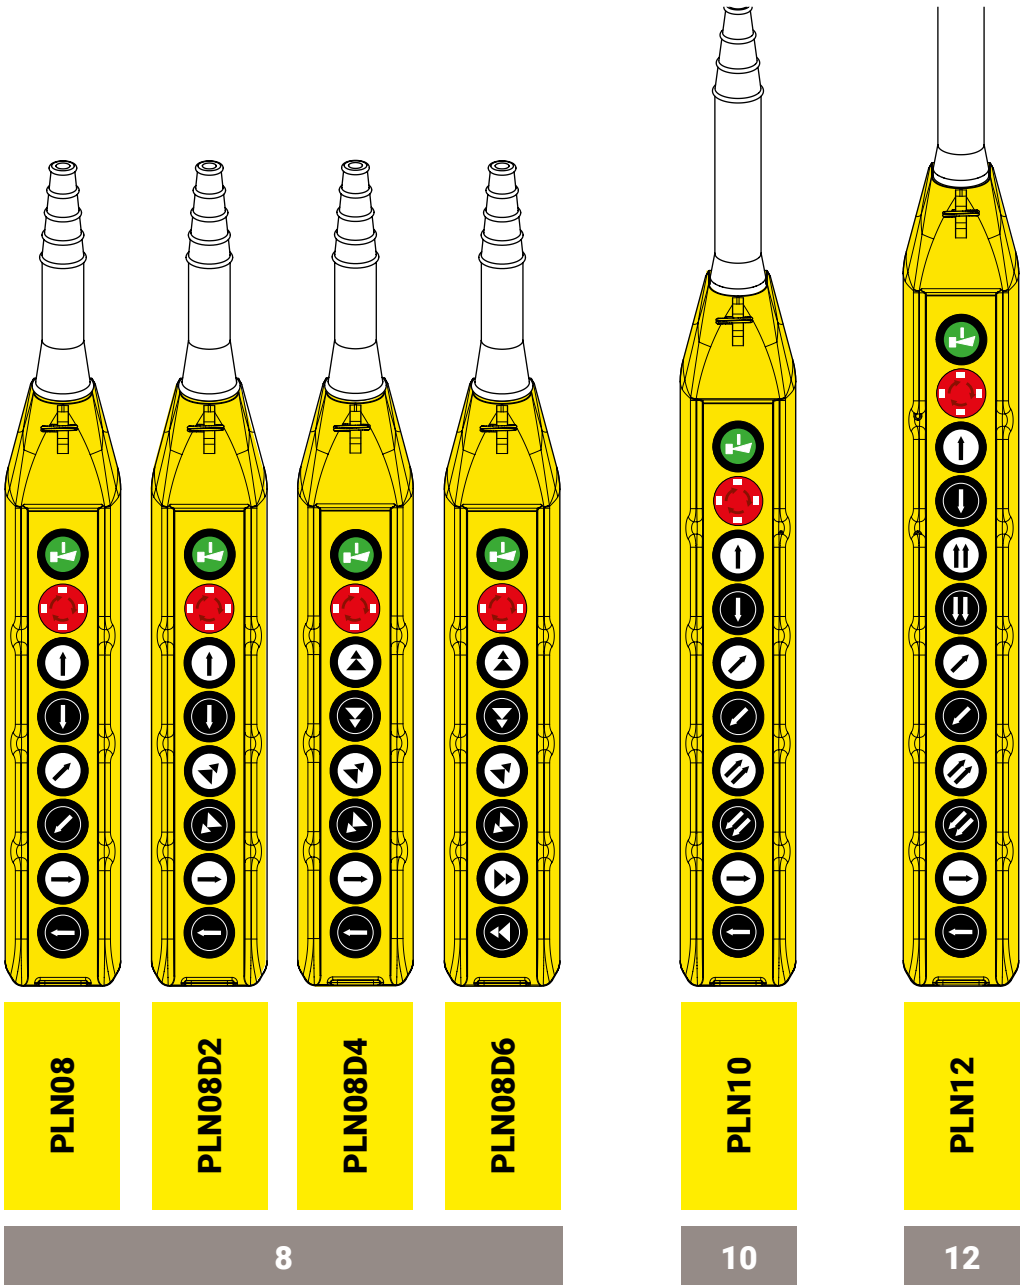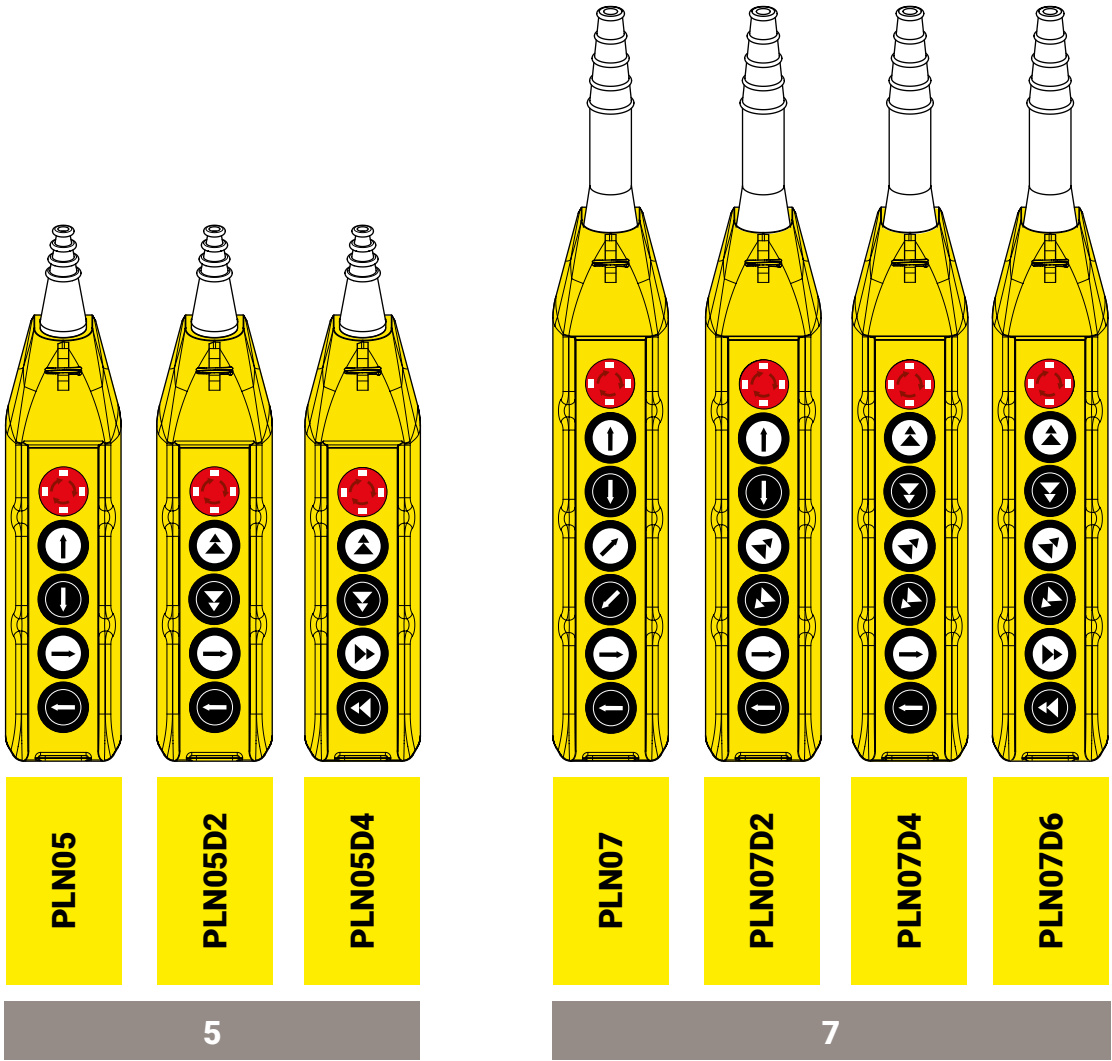

CONTACT CONFIGURATION										CONTACT CONFIGURATION							
1 NC	2 NO	1 NO	1 NO	1 NO	1 NO	1 NO	1 NO	2 NO	2 NO	2 NO	2 NO	NO+NO	NO+NO	NO+NO	NO+NO	NO+NO	NO+NO

CONTACT CODE

Single speed



1 NC

PL004001



1 NO


PL004002

Double speed



NO + NO

PL004010.S



TRUCK TAIL LIFT

Single row wall-mounted control station from 1 to 4 push buttons for truck tail lift

Features

- Bi-directionality is mechanically interlocked;
- IP65 Double insulation (IEC / EN 60529);
- Laser engraved symbols according to EN 60204-1, FEM 9.941;
- Shock proof and heat resistant;
- Available versions: from 1 to 5 holes;
- Available with UL/CSA requirements;
- Available upon request also in V0 material, UL approved.
- Available in kit version.

Available codes

TLP1.EPP		NC				
TLP1.ESR	NC					
TLP2			NO	NO		
TLP3.B	NC		NO	NO		
TLP3.D			NO	NO		NO
TLP4.C			NO	NO	NO	NO
TLP4.E	NC		NO	NO		NO

Compliance and certifications

- EN 60947-1 (2007/A1 : 2011/A2 : 2014)
- EN 60947-5-1 (2004/A1 : 2009/AC : 2004/AC : 2005)
- EN ISO 13850 (2015)
- EN 60204-1 (2006/A1 : 2009)
- EN-ISO 13849-1 (2015)
- EN ISO 13849-2 (2012)
- EN 60529 (1991/A1 : 2000/A2 : 2013)
- EN 50581 (2012)
- IEC 63000 (2016)
- 2014/35/UE
- 2011/65/UE
- 2015/863/UE

General characteristics		
Compliant to standards		IEC / EN60947-5-1
Material		PP (Moplen)
Material Group		II
Pollution class		3
Temperature	operating storage	-25°C ... +70°C -30°C ... +70°C
Cable entry		Cable gland M20

Electrical characteristics - Contact blocks		
Marking		
Rated insulation voltage [Ui]		690 V *
Rated impulse withstand voltage [Uimp]		4 kV *
Frequency		50/60 Hz *
Rated thermal current [Ith]		16 A *
Rated thermal current in enclosure [Ithe]		10 A
Rated operational current [Ie]		
AC-15 alternate current	type: PCW..	24 V 16 A * 60 V 12 A 110 V 5 A 240 V 5 A * 400 V 4 A 440 V 4 A 500 V 4 A * 690 V 2 A
DC-13 direct current	type: PCW..	24 V 2 A 48 V 2 A * 60 V 1 A * 110 V 0.4 A 250 V 0.4 A *
Conditional short circuit withstand current		1000 A *
Fuses rating gC		10 A * - 500 V
Contact insulation resistance		≤ 25 mΩ
Switching mechanism	type: PCW..	slow break double gap contacts
Positive operation		NC contact blocks - positive opening
Operating force		4 N
Electric durability AC-15		1 A 1.5 millions of cycles 2 A 0.5 millions of cycles 3 A 0.25 millions of cycles
Terminal type	type: PCW..	M3.5 screw terminals
Terminal capacity	type: PCW..	N° 1 or 2 flexible and solid conductor 1 ... 2.5 mm²
Climate resistance	IEC68 part 2-3 IEC68 part 2-30	damp heat, steady state damp heat, cyclic

UL508 characteristics		
Rated insulation voltage [Ui]		10 A - 600 V ac / 2.5 A - 125 V dc
Rated impulse withstand voltage [Uimp]		A600-Q600

* IMQ approved values

Available codes



TLP1.EPP



TLP1.ESR






TLP2



TLP3.B



TLP3.D

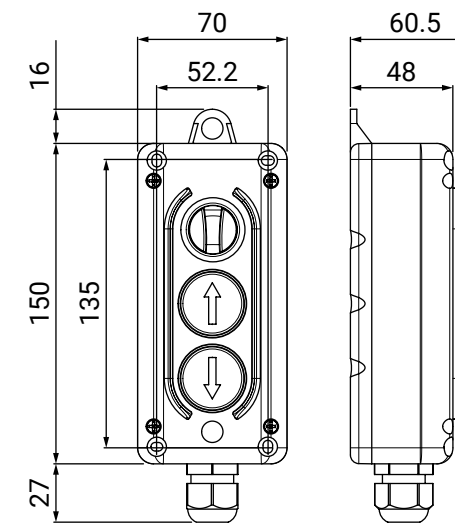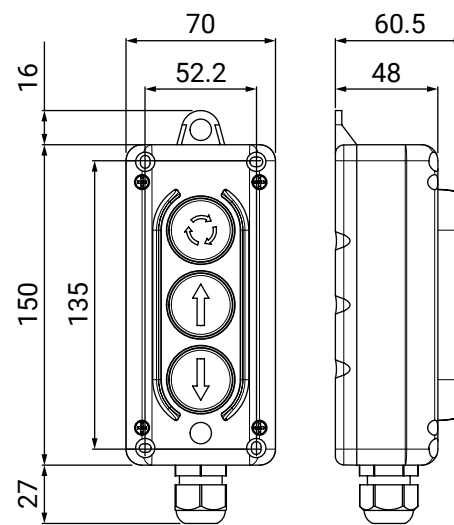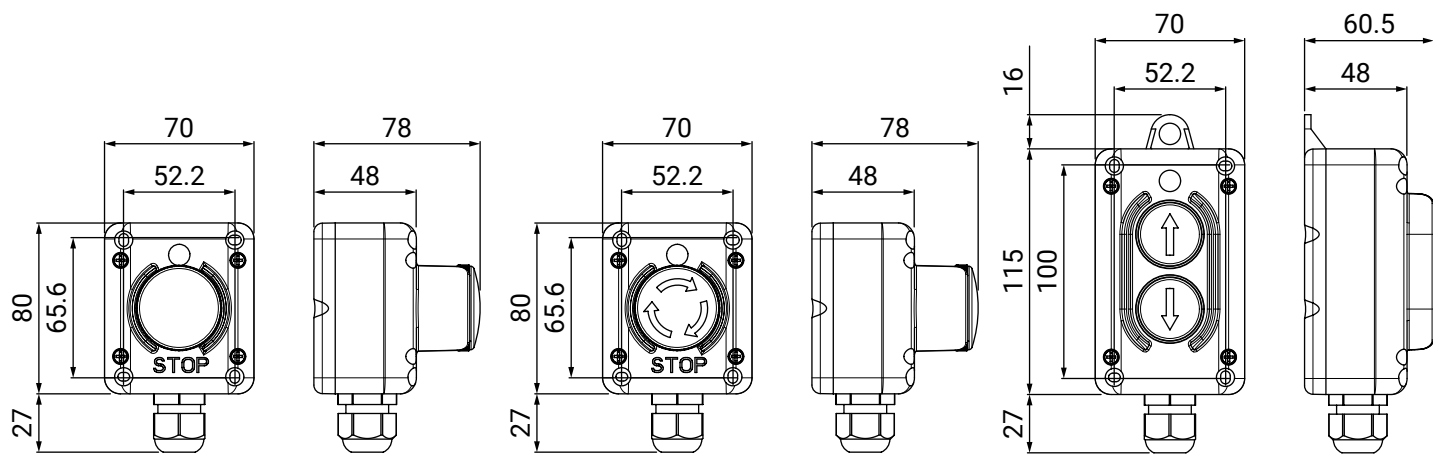

Available codes



Available codes



TLP4.C



TLP4.E

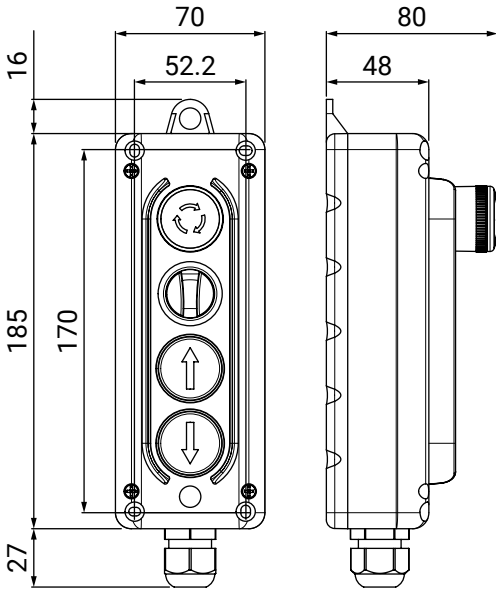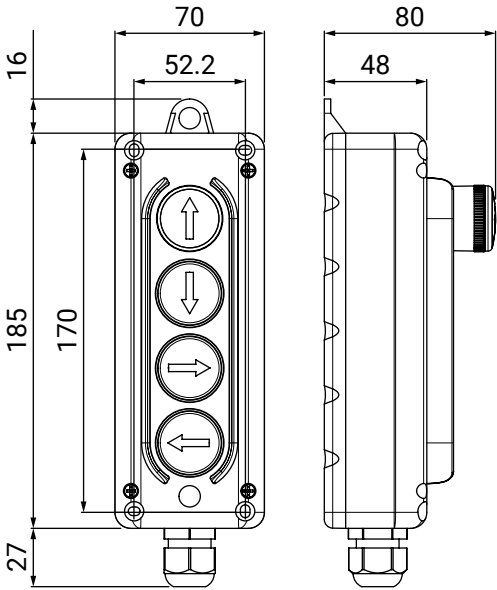

Standard versions

PRODUCT CODE	LAYOUT	PUSH BUTTON	CONTACT CONFIGURATION	
TLP1.EPP				1 NC
TLP1.ESR				1 NC
TLP2				1 NO
				1 NO
TLP3.B				1 NC
				1 NO
				1 NO
TLP3.D				1 NO
				1 NO
				1 NO
TLP4.C				1 NO
				1 NO
				1 NO
				1 NO
TLP4.E				1 NC
				1 NO
				1 NO
				1 NO

PENDANT
STATIONS

CONTACT CODE

Single speed



1 NC

PCW01



1 NO

PCW10

CUSTOM KITS

Pendant station and wall-mounted control stations

Giovenzana International B.V., leader in the field of handling system, produces a wide range of pendant control stations able to satisfy the most varied requirements. This range of products is also available in **fully custom kits**.

COMPOSE YOUR OWN CUSTOM KIT IN 3 EASY STEPS:

STEP 01

Choose the **pendant station type** as to page 56.

01



P02K - Single row pendant station with two holes for small hoist + assembly components

P03K - Single row pendant station with three holes for small hoist + assembly components

PL05K - Single row pendant station with five holes for crane + assembly components

PL07K - Single row pendant station with seven holes for crane + assembly components

PL08K - Single row pendant station with eight holes for crane + assembly components

PL10K - Single row pendant station with ten holes for crane + assembly components

PL12K - Single row pendant station with twelve holes for crane + assembly components

PLB04K - Double row pendant station with four holes for crane + assembly components

PLB06K - Double row pendant station with six holes for crane + assembly components

PLB08K - Double row pendant station with eight holes for crane + assembly components

PLB10K - Double row pendant station with ten holes for crane + assembly components

PLB12K - Double row pendant station with twelve holes for crane + assembly components

PLB14K - Double row pendant station with fourteen holes for crane + assembly components

TLP1K - Single row wall-mounted control station with one hole for truck tail lift + assembly components

TLP2K - Single row wall-mounted control station with two holes for truck tail lift + assembly components

TLP3K - Single row wall-mounted control station with three holes for truck tail lift + assembly components

TLP4K - Single row wall-mounted control station with four holes for truck tail lift + assembly components

TLP5K - Single row wall-mounted control station with five holes for truck tail lift + assembly components

STEP 02

Choose the **laser engraved push buttons** between our three series and **additional components** as to page 58.

02



PLN SERIES

PL SERIES

PL SERIES - ITALIAN LASER ENGRAVED



ADDITIONAL COMPONENTS

STEP 03

Choose the **contact blocks** as to page 63.

03



CONTACT BLOCKS

LAMP HOLDERS

DOUBLE SPEED CONTACT BLOCKS

THREE EASY STEPS TO COMPOSE YOUR OWN CUSTOMIZED COMPLETE DEVICE!

01



PENDANT STATION TYPE

02



LASER ENGRAVED
PUSH BUTTONS +
ADDITIONAL COMPONENTS

03



CONTACT BLOCKS

STEP 01

CHOOSE THE PENDANT STATION TYPE

The enclosure kit includes: pendant station base and cover, screws, gasket, cable sleeve and cable clamp, suspension ring, push button interlocks and coupling plates.

The list of detailed components for each type of control station is shown in our instruction manuals downloadable on our website www.giovenzana.com in the dedicated section of the technical documentation.



<https://www.giovenzana.com/technical-documentation/>

P02K
2 HOLES

P03K
3 HOLES



PL05K
5 HOLES

PL07K
7 HOLES

PL08K
8 HOLES



PL10K
10 HOLES

PL12K
12 HOLES



PLB04K
4 HOLES

PLB06K
6 HOLES

PLB08K
8 HOLES



PLB10K
10 HOLES

PLB12K
12 HOLES

PLB14K
14 HOLES



TLP1K
1 HOLE

TLP2K
2 HOLES



TLP3K
3 HOLES

TLP4K
4 HOLES

TLP5K
5 HOLES

STEP 02

CHOOSE THE LASER ENGRAVED PUSH BUTTONS

Giovenzana International B.V. offers 3 different laser engraved push buttons lines: **PLN**, **PL** and **PL for italian market** (as example of the possibility to engrave different languages on request).

FEATURES

- Wide selection of 22 mm or 30 mm operators including push buttons, rotary switches with knob or key command, pilot lights, emergency push buttons and additional components.
- Large variety of colors available.
- Laser engraved symbols are strictly according to FEM 9.941.
- Customized engraving and laser engraved push buttons in other languages are available **on minimum quantity request**.



PLN LINE

New series improved in aesthetic form and ergonomic soft touch



PL LINE

Giovenzana historical laser engraved push buttons series



PL LINE - ITALIAN LASER ENGRAVED

Giovenzana historical italian laser engraved push buttons series (for italian market only).
Available the possibility to engrave different languages on minimum quantity request.

PLN LINE

LASER ENGRAVED PUSH BUTTONS

Pair with the contact block with the matching label **A** to page 63.



PLN003



PLN004



PLN014



PLN013



PLN027



PLN026



PLN023



PLN021



PLN025



PLN019



PLN040



PLN039



PLN024



PLN022



PLN028



PLN020



PLN001



PLN002



PLN009



PLN010



PLN007



PLN008



PLN012



PLN011

DOUBLE SPEED LASER ENGRAVED PUSH BUTTONS

Pair with the contact block with the matching label **C** to page 64.



PLN005



PLN006



PLN018



PLN017



PLN016




PLN015

PL LINE

LASER ENGRAVED PUSH BUTTONS

Pair with the contact block with the matching label **A** to page 63.

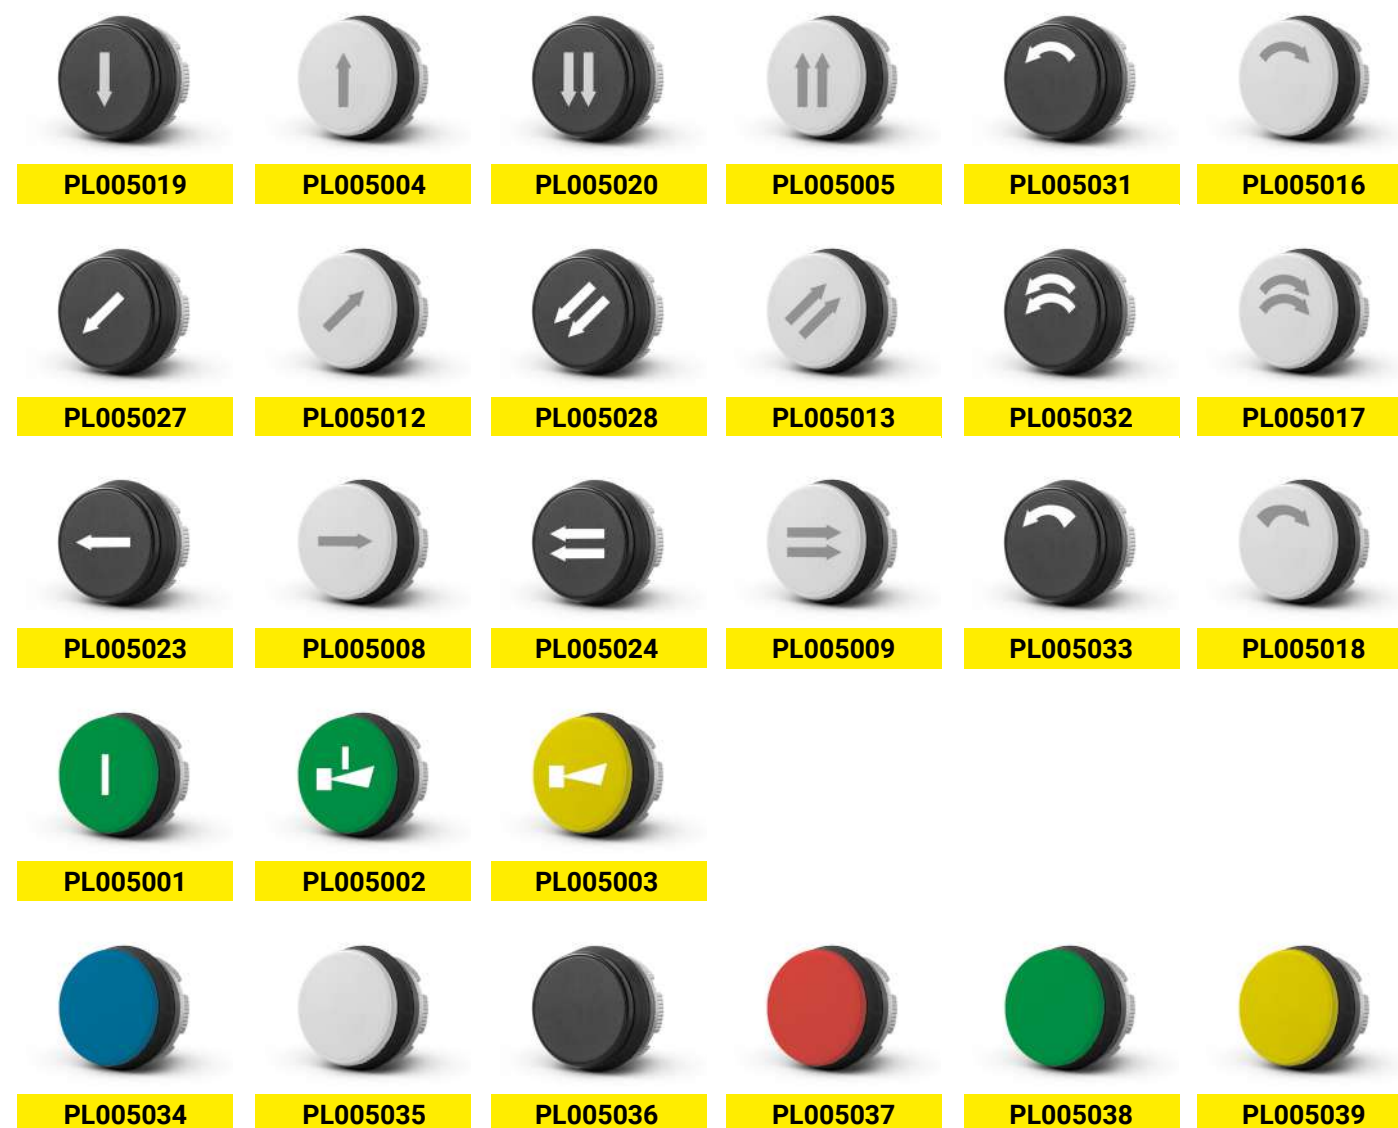


DOUBLE SPEED LASER ENGRAVED PUSH BUTTONS

Pair with the contact block with the matching label **C** to page 64.




Pair with the contact block with the matching label **A** to page 63.

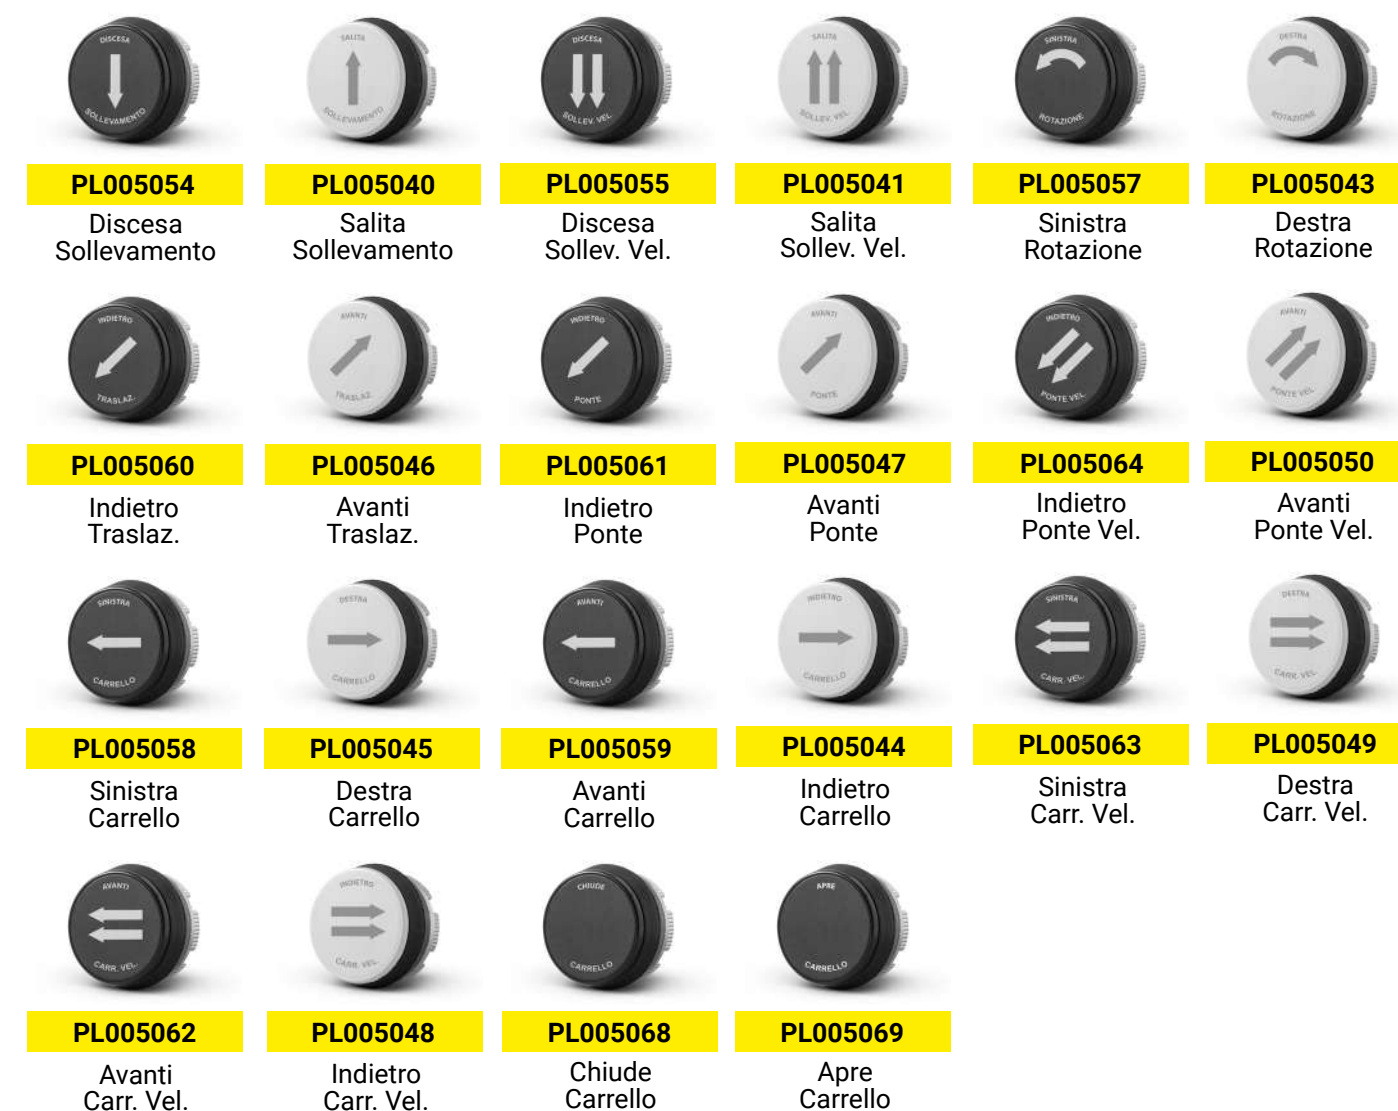

DOUBLE SPEED LASER ENGRAVED PUSH BUTTONS

Pair with the contact block with the matching label **C** to page 64.

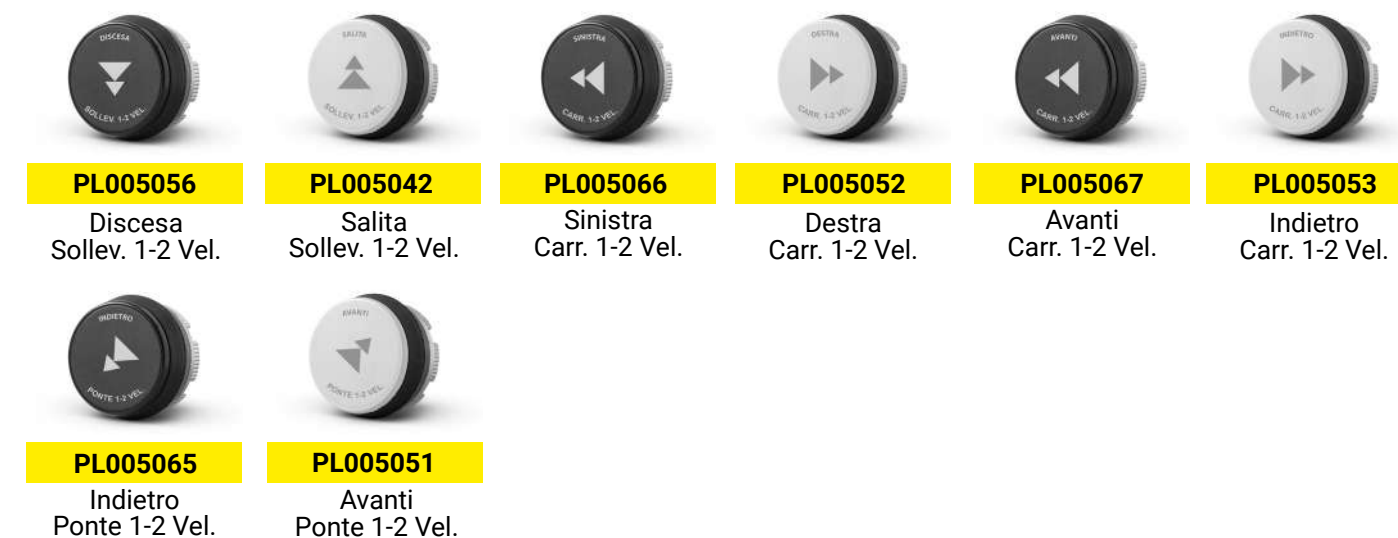

PILOT LIGHTS

Pair with the contact block with the matching label **B** to page 64.



PLSL1NL

PLSL2NL

PLSL3NL

PLSL4NL

PLSL5NL

EMERGENCY PUSH BUTTONS

Pair with the contact block with the matching label **A** to page 63.



PL013003BL

Mushroom
ø40 push-pull
momentary

PPFN1C4NX

Mushroom
ø40 with
key release

PL013001

Mushroom
ø30 twist to release
with vision

PL013002

Mushroom
ø30 twist
to release

ROTARY SWITCHES Ø22

Pair with the contact block with the matching label **A** to page 63.



PL007001BL

Rotary switch
with operator ø22
0-1 / 90°

PL007002BL

Rotary switch
with operator ø22
1-0-2 / 45°

PL007003BL

Rotary switch
with operator ø22
1>0<2 / 45°

PL006001BL

Rotary switch
with removable
key ø22,
0-1 / 90°

PL006002BL

Rotary switch
with removable
key ø22,
1-0-2 / 45°

PL006004BL

Rotary switch
with removable
key ø22,
1>0<2 / 45°

ADDITIONAL COMPONENTS



PL015001

Hole plug



PCF

Operators' fixing
key

CONTACT BLOCKS

- Giovenzana contact blocks offer the flexibility to operate multiple control circuits from a single pilot device.
- They are color coded for instant circuit identification to minimize wiring errors and to expedite the wiring process.
- The customers can combine contact block types to achieve his needed function.

The last step to complete your custom kit is to choose the right contact block.

Identify the type of contact to be associated to the selected operators following the indications.

SINGLE SPEED CONTACT BLOCKS

Pair with the laser engraved push buttons with the matching label **A** from page 59 to 61.



PL004001

For P02 / P03 / PL.. / PLB.. series

PL004002

PL004001CD

For P02 / P03 series

PL004002CD

PCW01

For HP.. / TLP.. series

PCW10

CODE	DESCRIPTION	DESIGNATION	FUNCTION	SIZES
PL004001	NC contact block Screw terminals Single speed	1 — NC — 2	0 1,5 6 mm	35.2 29 40 10
PL004002	NO contact block Screw terminals Single speed	3 — NO — 4	0 3,5 6 mm	35.2 29 40 10
PL004001CD	NC - Screw terminals Single speed Direct Control	1 — NC — 2	0 1,5 6 mm	35.2 29 40 10
PL004002CD	NO - Screw terminals Single speed Direct Control	3 — NO — 4	0 3,5 6 mm	35.2 29 40 10
PCW01	NC - Spring loaded terminals Single speed	1 — NC — 2	0 1,5 6 mm	27 21 38 10
PCW10	NO - Spring loaded terminals Single speed	3 — NO — 4	0 3,5 6 mm	27 21 38 10

DOUBLE SPEED CONTACT BLOCKS

Pair with the laser engraved push buttons with the matching label **C** from page 59 to 61.



PL004010.S

Double step
contact block
NO + NO









PCWDS

Double step
contact block
NO + NO

For P02 / P03 / PL / PLB / PLN / PLBN series

For HP / TLP series

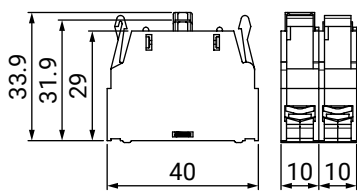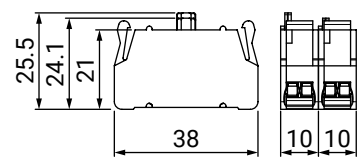
CODE	DESCRIPTION	DESIGNATION	SIZES
PL004010.S	 NO contact block Screw terminals High plunger	 1 st speed	
	 NO contact block Screw terminals Low plunger	 2 nd speed	
PCWDS	 NO contact block Spring loaded terminals High plunger	 1 st speed	
	 NO contact block Spring loaded terminals Low plunger	 2 nd speed	

LAMPHOLDER WITH BUILT-IN LED

Pair with the pilot lights with the matching label **B** to page 62.

For P02 / P03 / PL.. / PLB.. series

For HP.. / TLP.. series

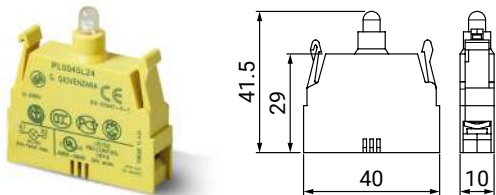

PL0045L12

AC/DC 12 V

PL0045L24

AC/DC 24 V

PL0045L48

AC/DC 48 V

PL0045L110


AC/DC 110 V

PL0045L220

AC/DC 220 V

DESIGNATION

X1—⊗—X2

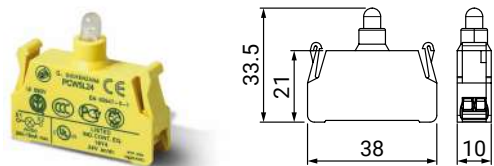

PCW5L12

AC/DC 12 V

PCW5L24

AC/DC 24 V

PCW5L48

AC/DC 48 V

PCW5L110


AC/DC 110 V

PCW5L220

AC/DC 220 V

DESIGNATION

X1—⊗—X2



PL003011

Coupling plate 2 holes
for 6 contact blocks



PL003012

Coupling plate 3 holes
for 9 contact blocks



20100242

Locking support 2 holes
for 6 contact blocks



20100243

Locking support 3 holes
for 9 contact blocks



12906011

P02 series
cable gland Ø 7 .. 14



12906006

P03 / PL .. 05 series
cable gland Ø 7 .. 18



12906004

PL .. 07 > PL .. 12 series
PLB .. 04 > PLB .. 06 series
cable gland Ø 9 .. 21



12906005

PLB .. 08 > PLB .. 14 series
cable gland Ø 12 .. 24



12901054

HP03 / TLP.. series
spiral cable gland M20 x 1.5



PL012001

Cable clamp
lever



16000061

Wall bracket
1 .. 3 holes



16000062

Wall bracket
4 .. 5 holes

ROTARY GEAR LIMIT SWITCHES

For more than 65 years, **Giovenzana International B.V.** has been designing and producing rotary gear limit switches, offering now four different series.

Rotary gear limit switches are used to control the movement of industrial machinery when it's necessary to measure movement based on the rotation angle and/or the number of shaft revolutions, providing upper, lower and/or intermediate limits for moving machinery and mechanisms.

Usually connected to the motor shaft, the rotary gear limit switch uses a series of gears and cams to activate a microswitch when the appropriate number of rotations is reached. This is generally used to stop the motor when a moving load has reached the desired position or final positions.

The device, through a gear transmission, controls a cam system operating on 2, 4 or more microswitches that after a certain number of revolutions predispose the motor or the equipment to the start or stop.

Each cam is equipped with a "micrometric" adjustable register screw that operates in an independent way, so it is possible to calibrate the opening and closing of each microswitch according to the necessary requirements.

The gear transmission system allows to choose different ratios and can be supplied in a bi-protruding shaft version or with linear control (potentiometer or encoder).


Each series of rotary limit switch has specific features which reduce time and costs for installation and maintenance.

Giovenzana International B.V. offers rotary gear limit switches with standard input ratios from 1:12 to 1:400 (custom input ratios are available on request up to 1:3572 - according to the configuration and the typology). They can be configured with maximum 8 contacts and combined with encoders and potentiometers to reach your own needs. We can offer snap action switches and different cam types to meet customers requirements.

The wide range of the input ratios (standards and customized) available in our series, make every customers and applications needs satisfied.

APPLICATIONS

Giovenzana rotary limit switches are suitable for several applications: from lifting machinery to industrial overhead doors and boat lifts, from theatre lighting hoists to renewable energy systems, like wind turbines.

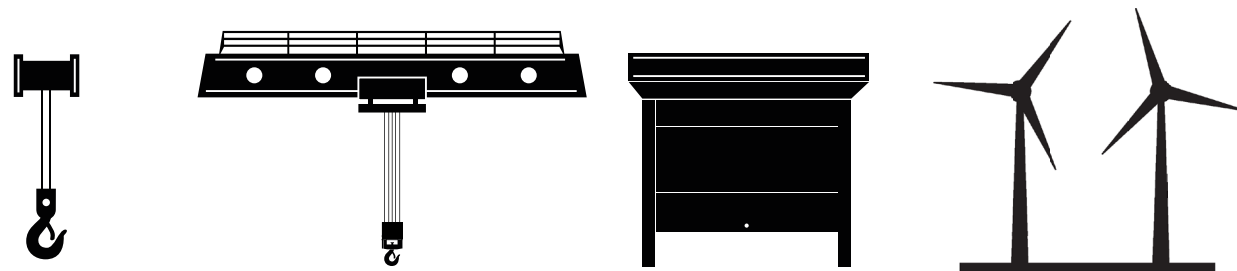

HOIST

CRANE

INDUSTRIAL DOORS

WIND TURBINES

SERIES



FGR0



FGR1



FGR2



FGR3

FEATURES

- The revolutions of the shaft are transmitted to a cam switch mechanism, through which mechanical switching contacts are actuated.
- Different ratios (also direct ratios) are available for the rotary gear limit switches of the FGR series.
- The switch can be equipped with a maximum of 8 switching contacts.
- Positive opening NC contacts for safety functions.
- Each cam can be individually adjusted to the desired position and thus enables flexible definition of end positions and reference points. More accurate adjustment of cams by means of screws.
- To reduce abrasion and rust, the transmission and guide shafts of the gears are made of stainless steel.
- The circumferential rubber gasket provides great protection against dust and water, allowing IP66 protection to be easily achieved for the entire products range.
- The optimised interior allows quick and easy cabling.

BENEFITS

- › High protection class degree
- › Extreme temperature resistance: -30°C to +70°C
- › Easy use, resistance and durability
- › Guaranteed safety



	FGR0	FGR1
GENERAL CHARACTERISTICS		
CASE	Self-extinguishing thermoplastic material	Thermoplastic glass fiber reinforced material
PROTECTION CLASS	IP67 - IEC / EN 60529	IP65 - IEC / EN 60529
RATIO	1:12, 1:25, 1:33, 1:50, 1:75, 1:100, 1:150, 1:200, 1:400	1:12, 1:33, 1:50, 1:75, 1:100, 1:150, 1:200, 1:400
DIRECT RATIO	1:25, 1:50	1:50, 1:75, 1:100
SHAFT TYPE	Stainless steel mounted on self-lubricating bush protected by sealing rings on both sides Double overhang shaft version available on request	Stainless steel Double overhang shaft version available on request
FIXING TYPE	Base fixing Front fixing (flanged)	Base fixing Front fixing (flanged)
MICRO SWITCHES	Nr 4 max - micrometric adjustment of roller lever (long life)	Nr 4 max - micrometric adjustment of roller lever (long life)
CAM BLOCK	Self-lubricating with transparent support for easier cam viewing	Self-lubricating with transparent support for easier cam viewing
CABLE ENTRY	M16 (max 2)	M16 or M20 (max 4)
AMBIENTAL TEMPERATURE	Operating: -25°C ... +70°C Storage: -30°C ... +70°C	Operating: -25°C ... +70°C Storage: -30°C ... +70°C

ELECTRICAL CHARACTERISTICS					
MICRO SWITCHES CONNECTIONS		MFI.3 - 6.3 x 0.8 faston terminal MFI.3STP - Screws M3 for wire 1.5 mm² with plate protection		MFI.7 - 6.3 x 0.8 faston terminal	
STANDARD CONFORMITY		IEC / EN 61058-1, UL 1054, EN 60204-1, EN 60947-1, EN 60947-5-1		IEC / EN 61058-1, UL 1054, EN 60204-1, EN 60947-1, EN 60947-5-1	
MARKING		CE, cRUus, CCC, EAC		CE, cRUus, CCC, EAC	
RATED INSULATION VOLTAGE - Ui		250V		250V	
RATHED THERMAL CURRENT - Ith		8A		8A	
RATHED OPERATING CURRENT	Resistive Load	8A - 250 V AC		8A - 250 V AC	
	Inductive Load	3A - 250 V AC		3A - 250 V AC	
RATHED IMPULSE WITH-STAND VOLTAGE - Uimp		1500 V		1500 V	
POSITIVE OPENING		NC positive opening ➞		NC positive opening ➞	
CONTACT BLOCKS		1NC - 1 NO changeover snap action / silver plated - self cleaning		1NC - 1 NO changeover snap action / silver plated - self cleaning	
PROTECTION CLASS		IP40 (IP00 terminals) in according to EN 60529		IP40 (IP00 terminals) in according to EN 60529	

OPTIONS		
DOUBLE OVERHANG SHAFT	Available	Available
POTENTIOMETER	According to customer request	-
ENCODER	-	-
CAM SHAPES	5 different cam shapes	5 different cam shapes
PINIONS	On request	20 different pinion shapes on request

	FGR2	FGR3
GENERAL CHARACTERISTICS		
CASE	Aluminium housing / self-extinguishing cover V0 UL94	Thermoplastic glass fiber reinforced material
PROTECTION CLASS	IP65 - IEC / EN 60529	IP66
RATIO	-	From 1:8 to 1:3572 (according to the configuration)
DIRECT RATIO	1:12, 1:33, 1:50, 1:100, 1:200	-
SHAFT TYPE	Steel mounted on ball bearings Double overhang shaft version available on request	AISI 304 Stainless steel mounted on ball bearings Double overhang shaft version available on request
FIXING TYPE	Base fixing Front fixing (flanged)	Base fixing Front fixing (flanged)
MICRO SWITCHES	Nr 6 max - micrometric adjustment of roller lever (long life)	Nr 8 max - micrometric adjustment of roller lever (long life)
CAM BLOCK	Self-lubricating	Self-lubricating with transparent support for easier cam viewing
CABLE ENTRY	M20 (max 2)	M20 (max 3)
AMBIENTAL TEMPERATURE	Operating: -25°C ... +70°C Storage: -30°C ... +70°C	Operating: -40°C ... +90°C Storage: -40°C ... +90°C

ELECTRICAL CHARACTERISTICS					
MICRO SWITCHES CONNECTIONS		MFI.7 - 6.3 x 0.8 faston terminal		MFI.7 - 6.3 x 0.8 faston terminal	
STANDARD CONFORMITY		IEC / EN 61058-1, UL 1054, EN 60204-1, EN 60947-1, EN 60947-5-1		IEC / EN 61058-1, UL 1054, EN 60204-1, EN 60947-1, EN 60947-5-1	
MARKING		CE, cRUus, CCC, EAC		CE, cRUus, CCC, EAC	
RATED INSULATION VOLTAGE - Ui		250V		250V	
RATHED THERMAL CURRENT - Ith		8A		8A	
RATHED OPERATING CURRENT	Resistive Load	8A - 250 V AC		8A - 250 V AC	
	Inductive Load	3A - 250 V AC		3A - 250 V AC	
RATHED IMPULSE WITH-STAND VOLTAGE - Uimp		1500 V		1500 V	
POSITIVE OPENING		NC positive opening ➞		NC positive opening ➞	
CONTACT BLOCKS		1NC - 1 NO changeover snap action / silver plated - self cleaning		1NC - 1 NO changeover snap action / silver plated - self cleaning	
PROTECTION CLASS		IP40 (IP00 terminals) in according to EN 60529		IP40 (IP00 terminals) in according to EN 60529	

OPTIONS		
DOUBLE OVERHANG SHAFT	Available	Available
POTENTIOMETER	-	According to customer request
ENCODER	-	According to customer request
CAM SHAPES	3 different cam shapes	5 different cam shapes
PINIONS	20 different pinion shapes on request	20 different pinion shapes on request



Rotary gear limit switch with overall reduced sizes

The **FGRO** is a device for controlling revolutions of rotating components or the angular position of industrial or construction machinery. A typical application is for small cranes. Also suitable for different applications such as automatic doors or automatic roofs in greenhouses. The unit, through a system of gears and cams transmission, controls 2 or 4 microswitches so, after a certain number of revolutions, predispose the motor or the equipment to the start or stop operation.

The microswitches have a calibration screw that works independently on each cam; so you can calibrate the opening and closing of each micro according to the necessary functional requirements.

The system change allows you to choose different ratios from 1:12 to 1:1480.

General features

- Different versions available:
 - base fixing;
 - front fixing (with standard flange);
 - with double overhang shaft (on request).
- Overall size is reduced.
- Two different cover heights depending on whether the device is equipped with 2 or 4 microswitches.
- IP67 protection class (IEC / EN 60529).
- Available in different ratios: 1:12, 1:25, 1:33, 1:50, 1:75, 1:100, 1:150, 1:200, 1:400 (optional on request).
- Available in direct ratio: 1:25, 1:50 (others direct ratio on request).
- Available on request with pinions.
- Micro switches:
 - device available with 2 or 4 microswitches;
 - the working point is adjustable with a calibration screw;
 - each switch has 1NO + 1NC inside;
 - positive opening for NC contacts.

Compliance and certifications

- 2014/35/UE - 2014/33/UE - 2011/65/UE - 2015/863/UE
- EN 60947-1 (2007/A1 : 2011/A2 : 2014)
- EN 60947-5-1 (2004/A1 : 2009/AC : 2004/AC : 2005)
- EN 60204-1 (2006/A1 : 2009)
- EN 60529 (1991/A1 : 2000/A2 : 2013)
- EN 50581 (2012)
- IEC 63000 (2016)

Base Fixing versions

X-ray views



2 microswitches





4 microswitches




2 microswitches
Direct Ratio




4 microswitches
Direct Ratio

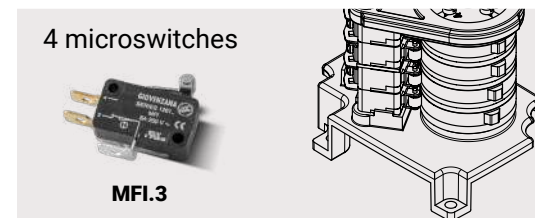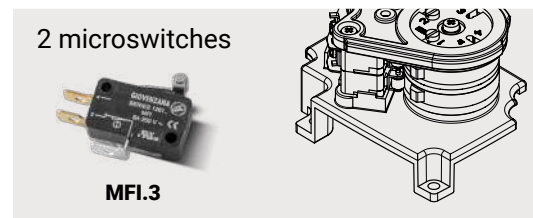

Base fixing
2 microswitches

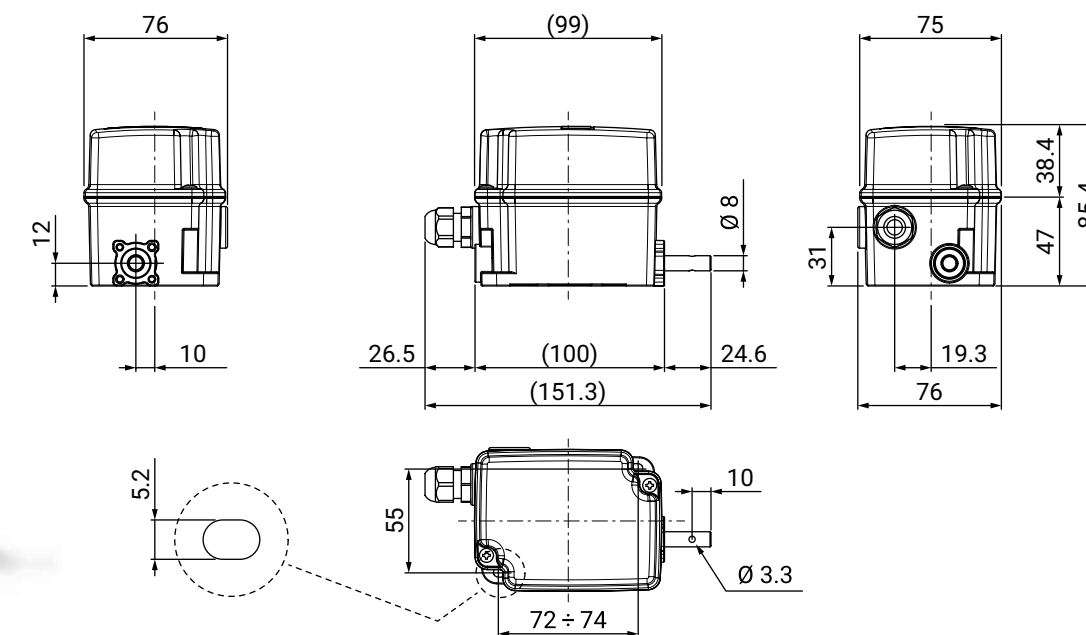


Base fixing
4 microswitches

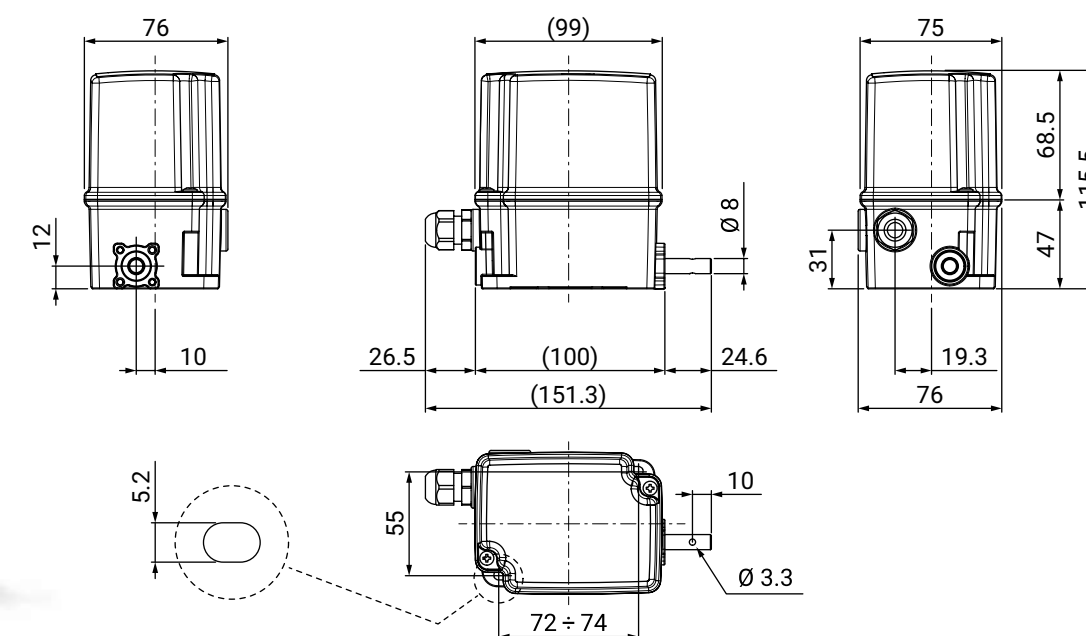

Available codes




Front fixing
2 microswitches

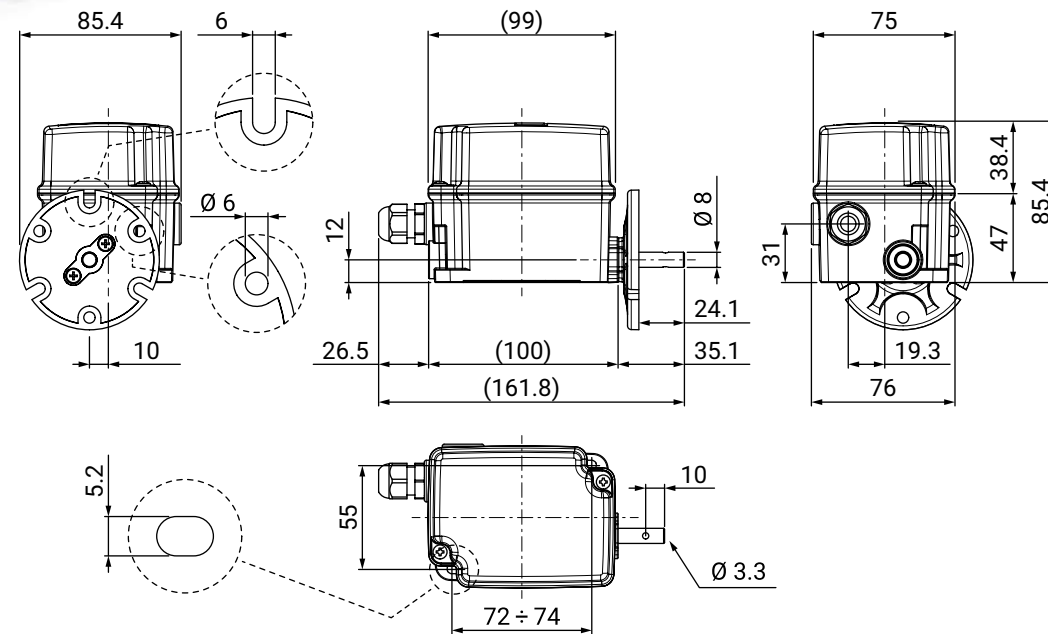


Available codes




Double overhang shaft
2 microswitches

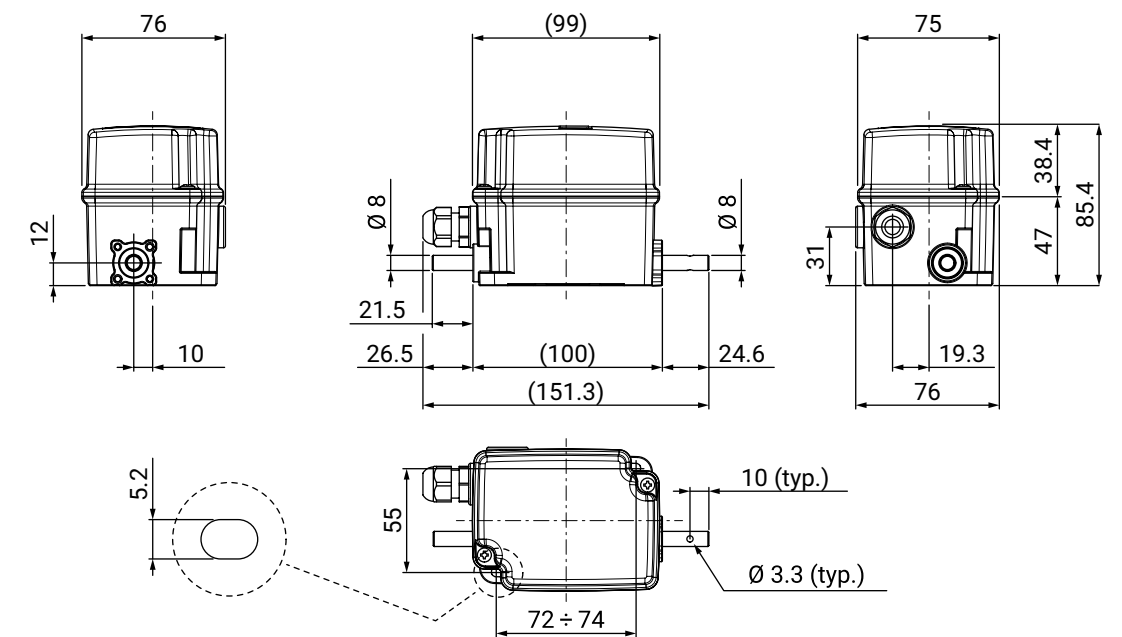

Front fixing
4 microswitches

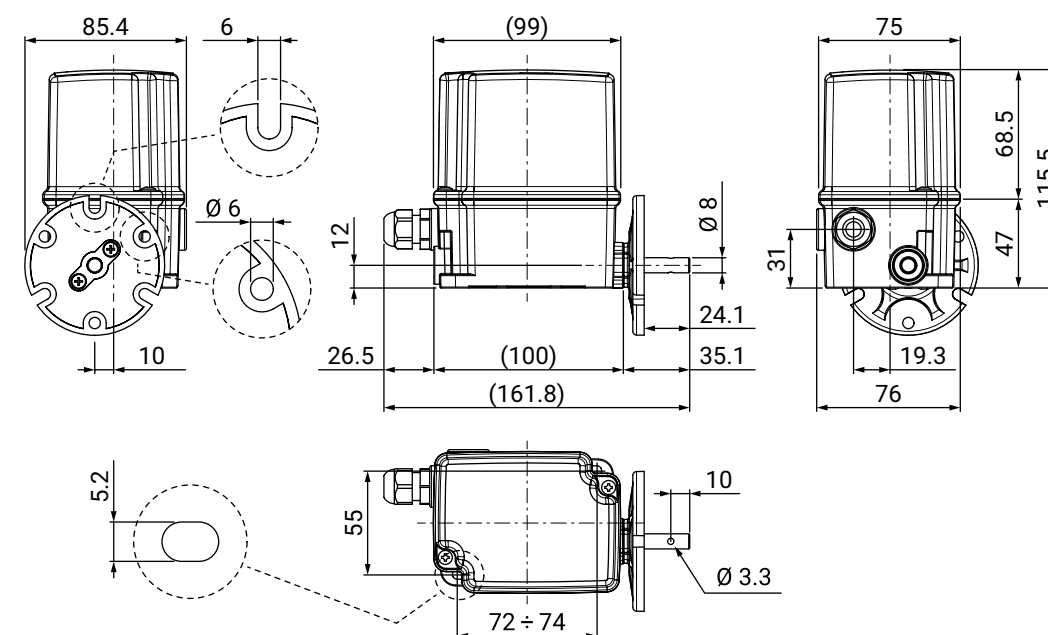

Double overhang shaft
4 microswitches

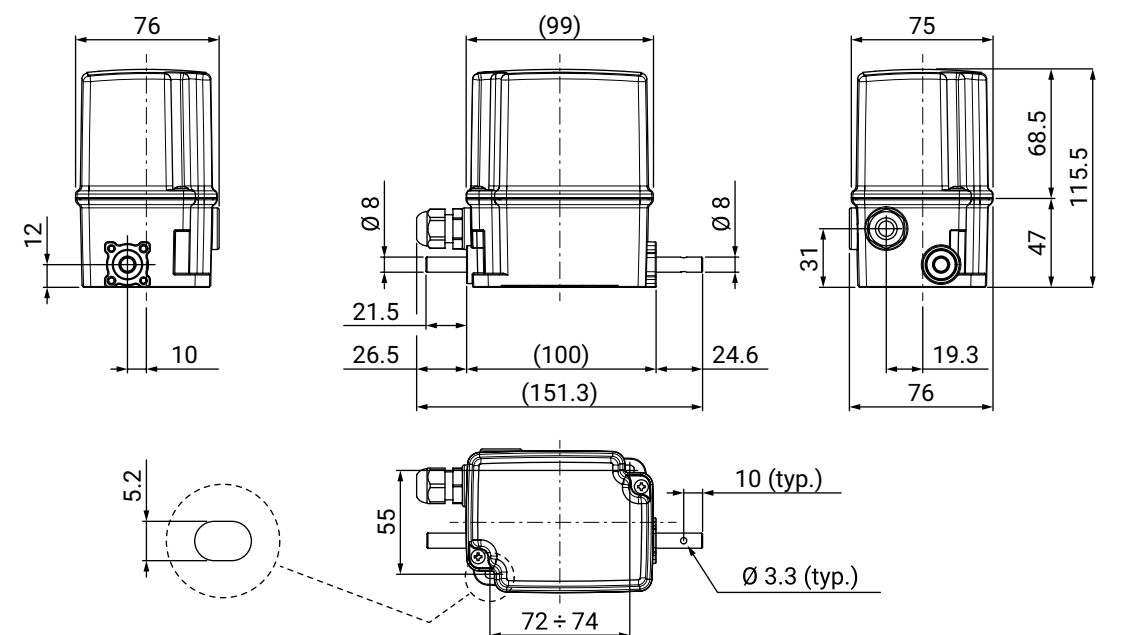

Coding system

The **FGR0** coding system is very clear: each block of digits identifies a specific function. The code provides all the informations that can be used to specify each customization.

FGR0	-	0012	M	F	-	4	A	-	E1	-	01
Series	-	Nr. gear ratio	Shaft type	Flange	-	Nr. contacts	Contacts type	-	Options	-	Progressive versions
			M = single shaft B = double overhang shaft				A = MFI.3 (standard) B = MFI.3STP (on request)		E = Encoder P = Potentiometer		Not standard shaft, cams, pinions, colors, logos, extra accessories, etc...
STANDARD ENCODING								OPTIONAL ENCODING			

Available codes

Base fixing

2 microswitches



FGR0-0012M-2A
FGR0-0025M-2A
FGR0-0033M-2A
FGR0-0050M-2A
FGR0-0075M-2A
FGR0-0100M-2A
FGR0-0150M-2A
FGR0-0200M-2A
FGR0-0400M-2A

Base fixing

4 microswitches



FGR0-0012M-4A
FGR0-0025M-4A
FGR0-0033M-4A
FGR0-0050M-4A
FGR0-0075M-4A
FGR0-0100M-4A
FGR0-0150M-4A
FGR0-0200M-4A
FGR0-0400M-4A

Double overhang shaft

2 microswitches



FGR0-0012B-2A
FGR0-0025B-2A
FGR0-0033B-2A
FGR0-0050B-2A
FGR0-0075B-2A
FGR0-0100B-2A
FGR0-0150B-2A
FGR0-0200B-2A
FGR0-0400B-2A

Double overhang shaft

4 microswitches



FGR0-0012B-4A
FGR0-0025B-4A
FGR0-0033B-4A
FGR0-0050B-4A
FGR0-0075B-4A
FGR0-0100B-4A
FGR0-0150B-4A
FGR0-0200B-4A
FGR0-0400B-4A

Front fixing

2 microswitches



FGR0-0012MF-2A
FGR0-0025MF-2A
FGR0-0033MF-2A
FGR0-0050MF-2A
FGR0-0075MF-2A
FGR0-0100MF-2A
FGR0-0150MF-2A
FGR0-0200MF-2A
FGR0-0400MF-2A

Front fixing

4 microswitches



FGR0-0012MF-4A
FGR0-0025MF-4A
FGR0-0033MF-4A
FGR0-0050MF-4A
FGR0-0075MF-4A
FGR0-0100MF-4A
FGR0-0150MF-4A
FGR0-0200MF-4A
FGR0-0400MF-4A

AVAILABLE CONTACT TYPES

MFI.3

MFI.3STP

AVAILABLE CAM SHAPES

10°

16020081

A (10°) - STANDARD

60°

16020097

B (60°)

175°

16020094

C (180°)

338°

16020095

D (opposite)

10° x10

16020093

E (10 tips)

Rotary gear limit switch


The **FGR1** is a device used to control and measure the movement of industrial machines by measuring the rotation angle and/or counting the number of revolutions of a shaft.

General features

- Different versions available:
 - base fixing;
 - front fixing;
 - with double overhang shaft.
- IP65 Protection class.
- Available in different ratios: 1:12, 1:33, 1:50, 1:75, 1:100, 1:150, 1:200, 1:400 (optional on request).
- Available in direct ratio: 1:50, 1:75, 1:100 (others direct ratio on request).
- Available on request with pinions.
- Micro switches:
 - device available with 4 microswitches;
 - the working point is adjustable with a calibration screw;
 - each switch has 1NO + 1NC inside;
 - positive opening for NC contacts.


Compliance and certifications

- 2014/35/UE - 2014/33/UE - 2011/65/UE - 2015/863/UE
- EN 60947-1 (2007/A1 : 2011/A2 : 2014)
- EN 60947-5-1 (2004/A1 : 2009/AC : 2004/AC : 2005)
- EN 60204-1 (2006/A1 : 2009)
- EN 60529 (1991/A1 : 2000/A2 : 2013)
- EN 50581 (2012)
- IEC 63000 (2016)

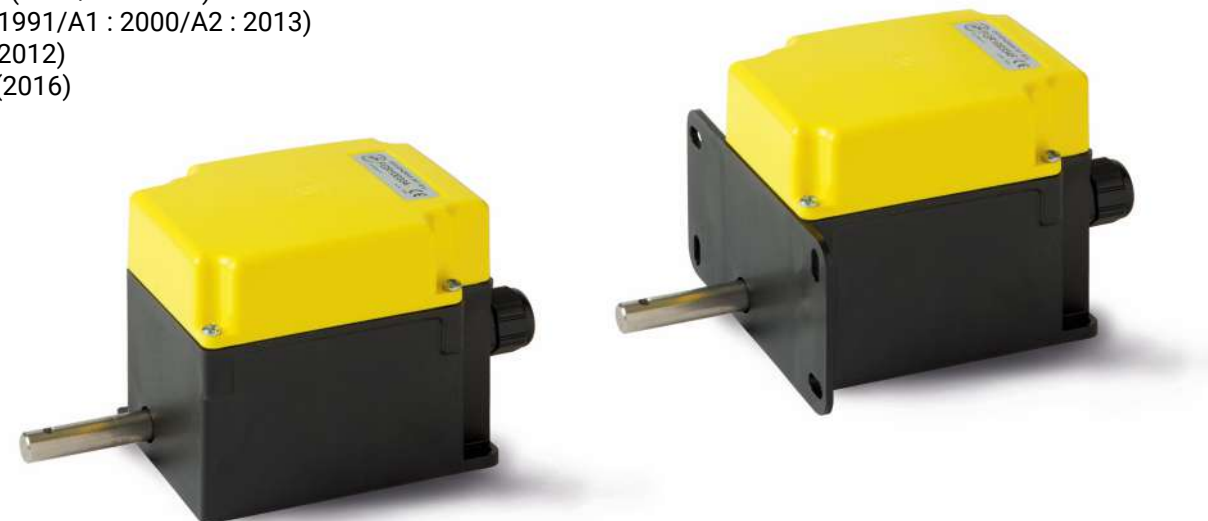


Base Fixing versions

X-ray views



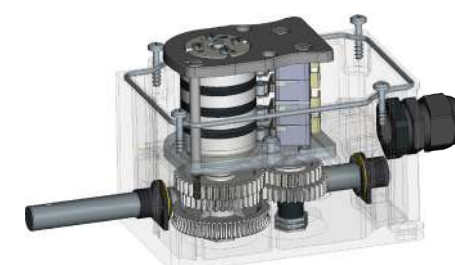


4 microswitches

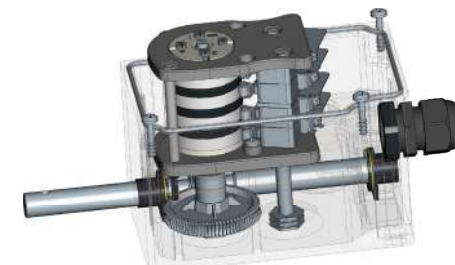




4 microswitches
Direct Ratio

Available codes

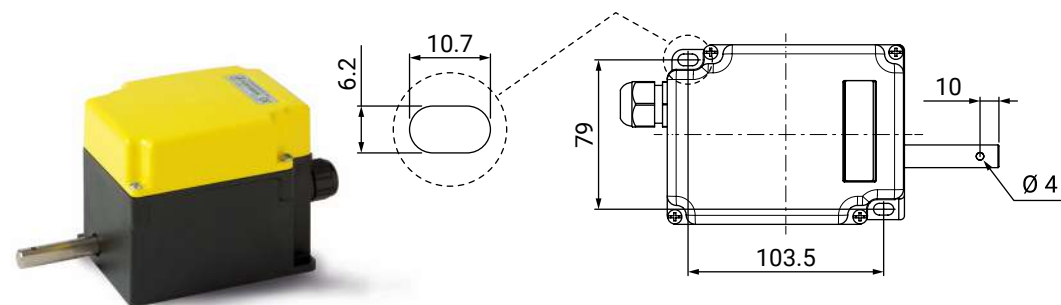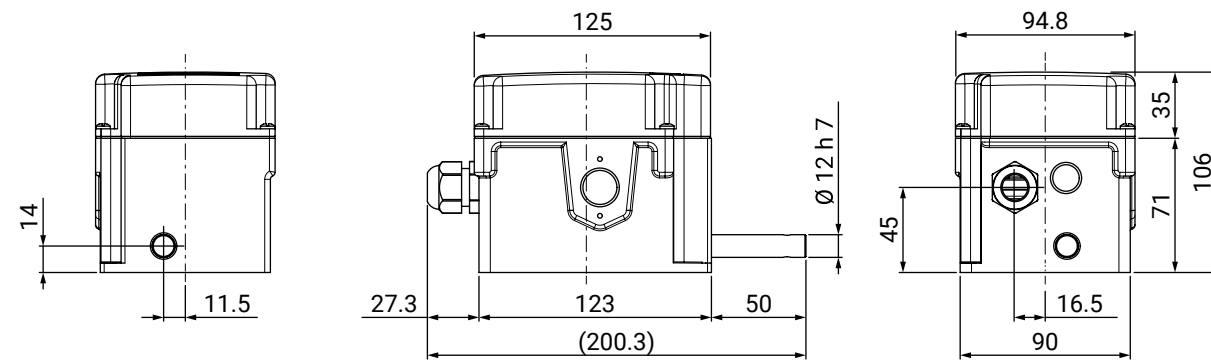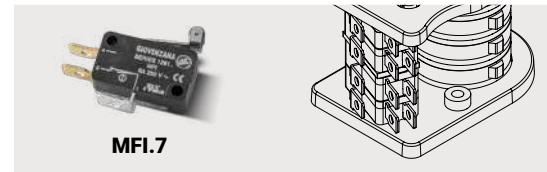



Base fixing
4 microswitches

Available codes

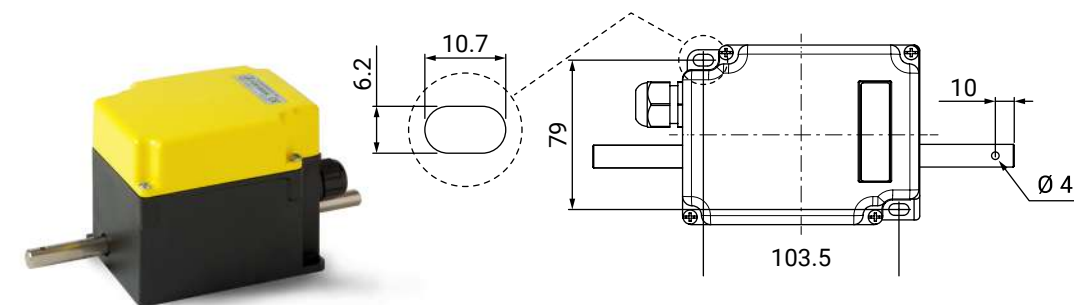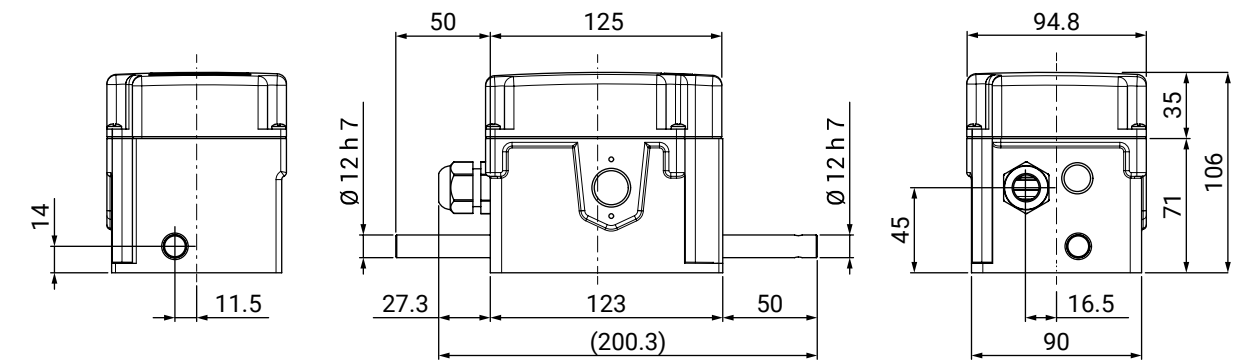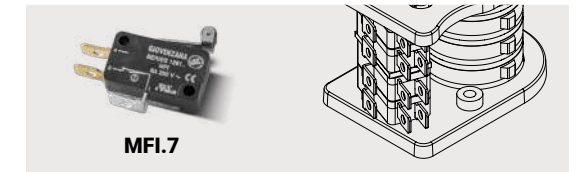

Double overhang shaft
4 microswitches

ROTARY LIMIT
SWITCHES

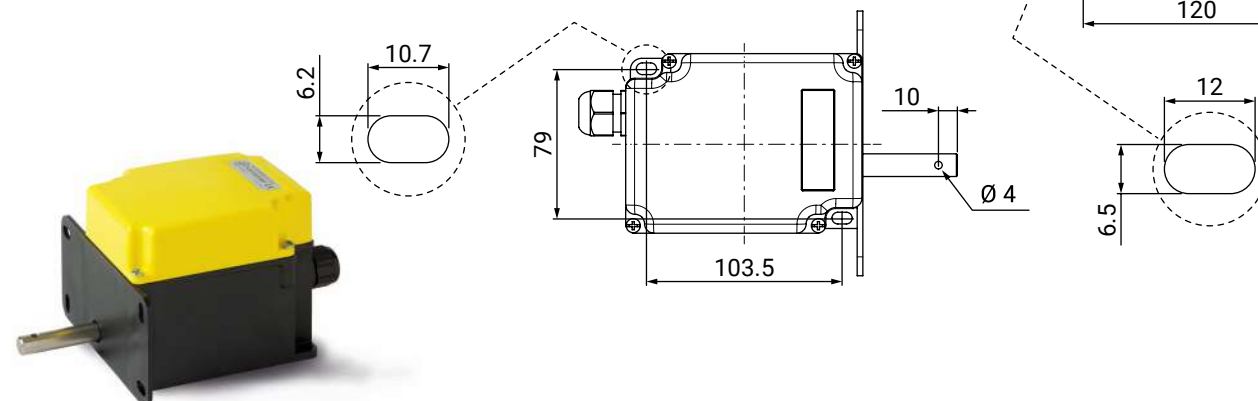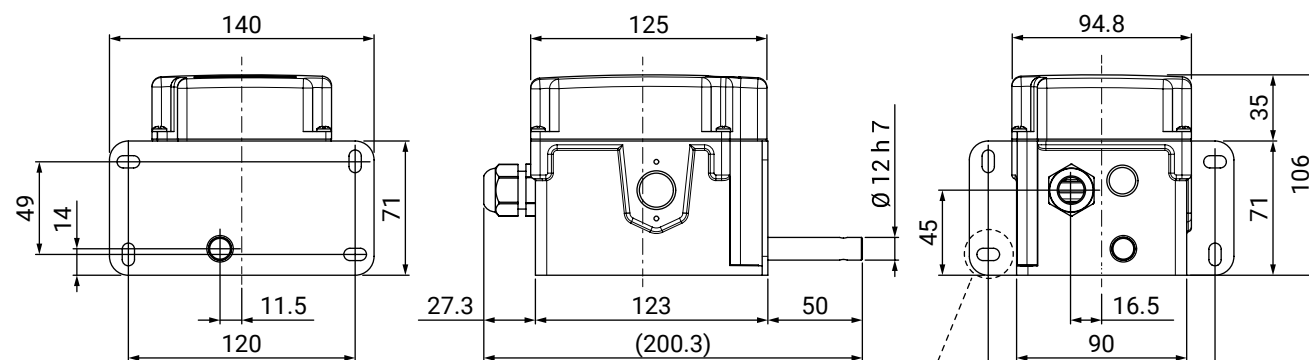

Front fixing
4 microswitches






Coding system

The **FGR1** coding system is very clear: each block of digits identifies a specific function. The code provides all the informations that can be used to specify each customization.

FGR1	0012/0400	0-2-3-4	B	F	-	01
Series	Nr. gear ratio	Micro/cams	Shaft type	Flange	-	Options
	Between shaft and cam pack output.	0 = None 2 = Nr. 2 3 = Nr. 3 4 = Nr. 4	Blank = Single shaft B = Double overhang shaft	Blank = Without F = With flange	-	Progressive versions
STANDARD ENCODING					OPTIONAL ENCODING	

Available codes

Base fixing 4 microswitches	Front fixing 4 microswitches	Double overhang shaft 4 microswitches
		
FGR100124	FGR100124F	FGR100124B
FGR100334	FGR100334F	FGR100334B
FGR100504	FGR100504F	FGR100504B
FGR100754	FGR100754F	FGR100754B
FGR101004	FGR101004F	FGR101004B
FGR101504	FGR101504F	FGR101504B
FGR102004	FGR102004F	FGR102004B
FGR104004	FFGR104004F	FGR104004B

AVAILABLE CONTACT TYPES		AVAILABLE CAM SHAPES		
				
MFI.7	MFI.7STP On request	16020081 A (10°) - STANDARD	16020097 B (60°)	16020094 C (180°)
				
		16020095 D (opposite)	16020093 E (10 tips)	

Rotary gear limit switch


The **FGR2** is suitable for overhead crane winches, the speed control of rotating drums winding cables, machinery, etc... Equipped with adjustable micrometric screw, lives on each of the cams. The operation of the microswitches allows, by means of a screwdriver, the stroke calibration and therefore the opening or closing of the contacts according to the functional requirements.

General features

- Different versions available:
 - base fixing;
 - with double overhang shaft;
 - front fixing (base fixing + FLG accessory). On request.
- IP65 Protection class.
- Available in direct ratios: 1:12, 1:33, 1:50, 1:75, 1:100, 1:200 (optional on request).
- Available on request with pinions.
- Micro switches:
 - device available with 4 or 6 microswitches;
 - the working point is adjustable with a calibration screw;
 - each switch has 1NO + 1NC inside;
 - positive opening for NC contacts.


Compliance and certifications

- 2014/35/UE - 2014/33/UE - 2011/65/UE - 2015/863/UE
- EN 60947-1 (2007/A1 : 2011/A2 : 2014)
- EN 60947-5-1 (2004/A1 : 2009/AC : 2004/AC : 2005)
- EN 60204-1 (2006/A1 : 2009)
- EN 60529 (1991/A1 : 2000/A2 : 2013)
- EN 50581 (2012)
- IEC 63000 (2016)

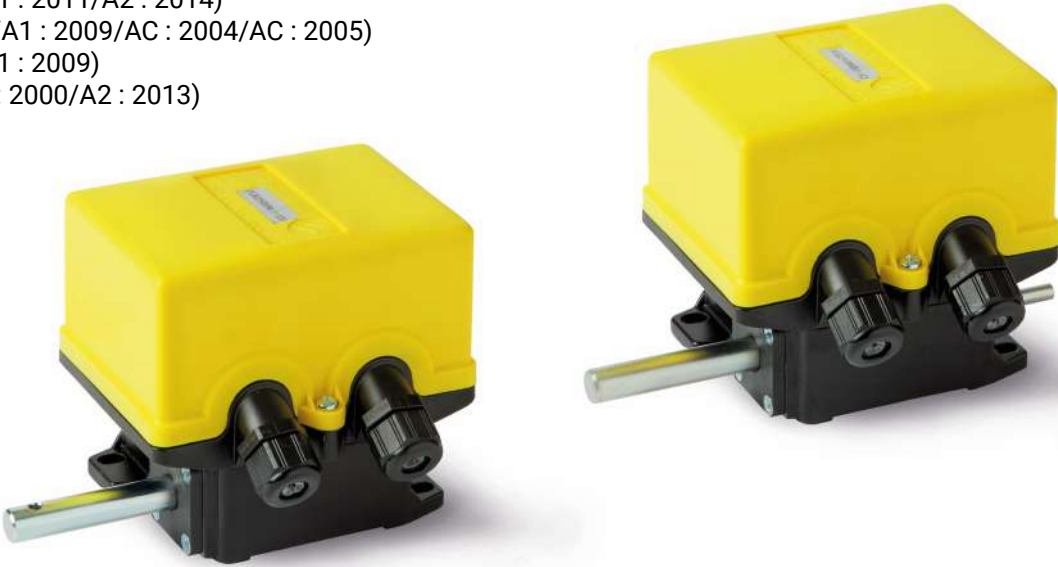


Base Fixing versions

X-ray views

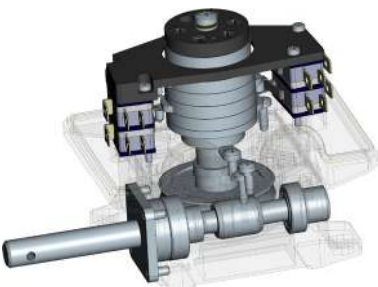

4 microswitches
Direct Ratio

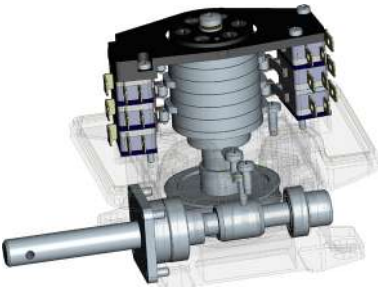


6 microswitches
Direct Ratio



ROTARY LIMIT SWITCHES

Available codes



FGR2
Internal cam pack
4 microswitches



FGR2
Internal cam pack
6 microswitches

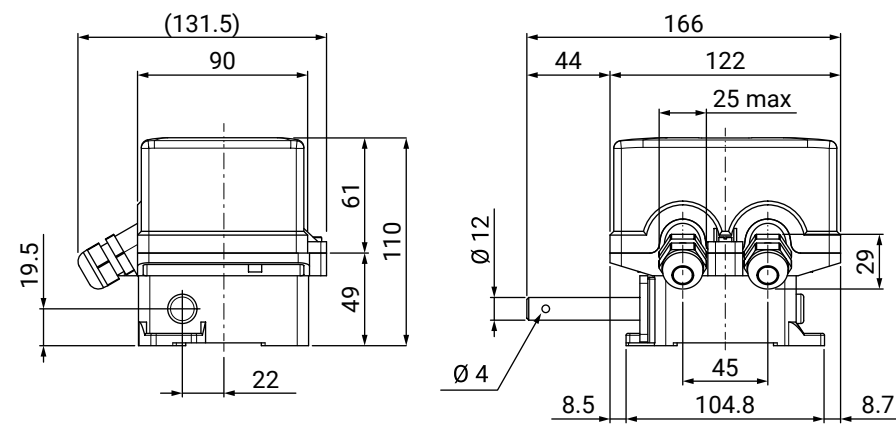


Base fixing
4 or 6 microswitches


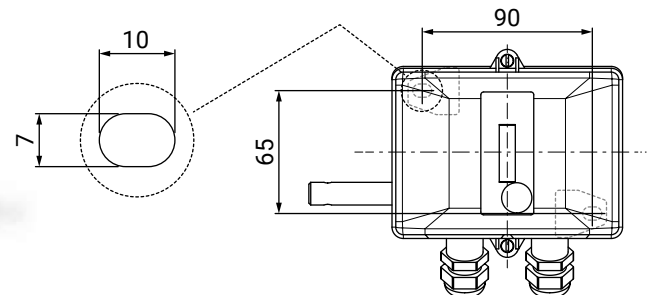


Available codes





FGR2
Internal cam pack
4 microswitches




FGR2
Internal cam pack
6 microswitches

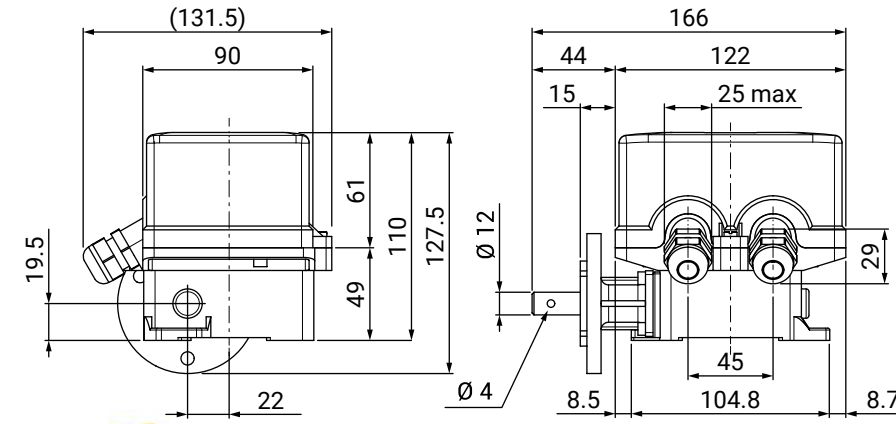



Front fixing
4 or 6 microswitches

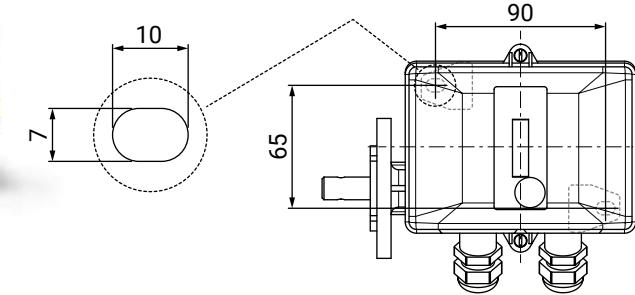

ROTARY LIMIT
SWITCHES

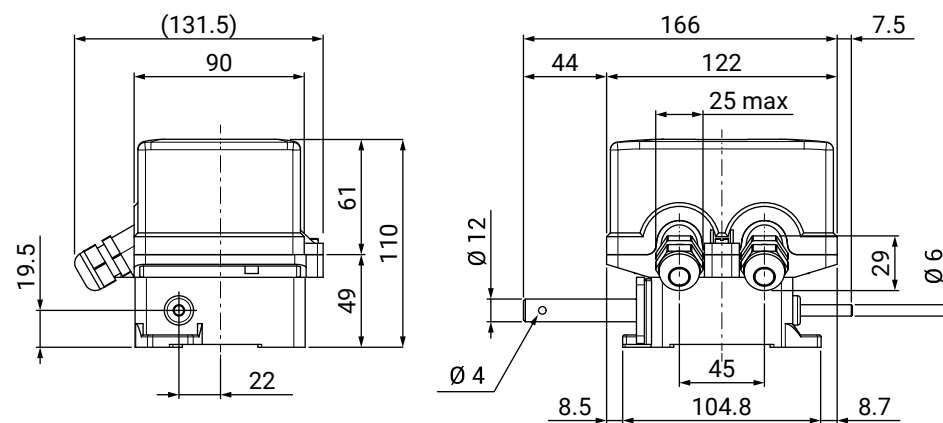

Double overhang shaft
4 or 6 microswitches

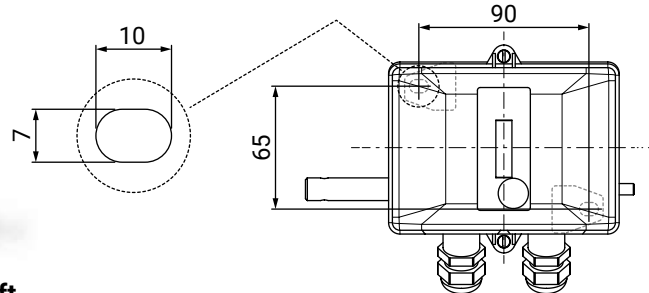

Coding system

The **FGR2** coding system is very clear: each block of digits identifies a specific function. The code provides all the informations that can be used to specify each customization.

FGR2	F	N	006/007/008/009/010	B	6
Series	Flange	Contact type	Identity number	Shaft type	Micro/cams
	Blank = Without F = With flange	MFI.7		Blank = Single shaft B = Double overhang shaft	Blank = Nr. 4 6 = Nr. 6
STANDARD ENCODING					

Available codes

Ratio	Base fixing 4 microswitches	Base fixing 6 microswitches	Double overhang shaft 4 microswitches	Double overhang shaft 6 microswitches
1:12	FGR2N006	FGR2N0066	FGR2N006B	FGR2N006B6
1:33	FGR2N007	FGR2N0076	FGR2N007B	FGR2N007B6
1:50	FGR2N008	FGR2N0086	FGR2N008B	FGR2N008B6
1:100	FGR2N009	FGR2N0096	FGR2N009B	FGR2N009B6
1:200	FGR2N010	FGR2N0106	FGR2N010B	FGR2N010B6

Front fixing 4 or 6 microswitches

(A) Base fixing code plus **FLG** flange sold separately;


B) Front fixing device already assembled to be requested with code **FGRF2..**

AVAILABLE CONTACT TYPES




MFI.7


AVAILABLE CAM SHAPES



11703030
A (30°) - STANDARD



11703031
B (15°)



1173032
C (90°)

Rotary gear limit switch

The **FGR3** is a device used to control and measure the movement of industrial machines by measuring the rotation angle and/or counting the number of revolutions of a shaft. It is suitable for several applications like cranes and wind turbines.

Geneal features


- Different versions available:
 - base fixing;
 - with double overhang shaft;
 - front fixing (on request).
- IP66 protection class.
- Available in different ratios: from 1:8 to 1:3572 (according to the configuration).
- Available on request with pinions.
- Microswitches:
 - device available potentially until 8 microswitches;
 - the working point is adjustable with a calibration screw;
 - each switch has 1NO + 1NC inside;
 - positive opening for NC contacts.

Compliance and certifications


- 2014/35/UE - 2014/33/UE - 2011/65/UE - 2015/863/UE
- EN 60947-1 (2007/A1 : 2011/A2 : 2014)
- EN 60947-5-1 (2004/A1 : 2009/AC : 2004/AC : 2005)
- EN 60204-1 (2006/A1 : 2009)
- EN 60529 (1991/A1 : 2000/A2 : 2013)
- EN 50581 (2012)
- IEC 63000 (2016)

Base Fixing versions

X-ray views


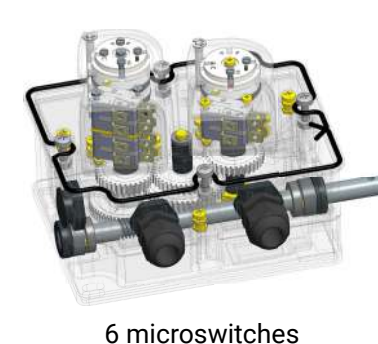


6 microswitches

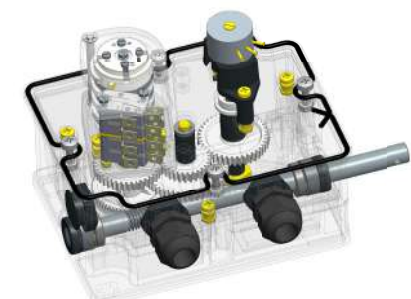

4 microswitches
with potentiometer

Available codes

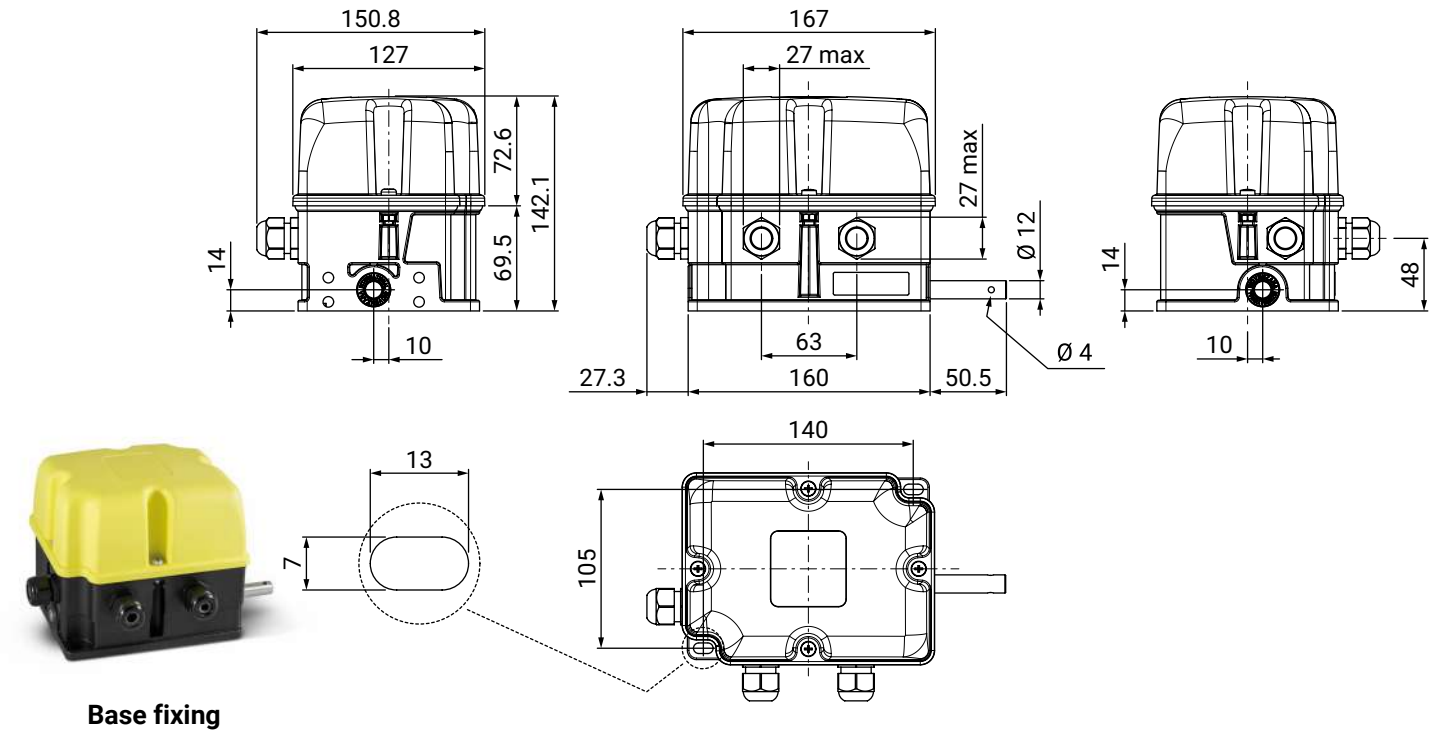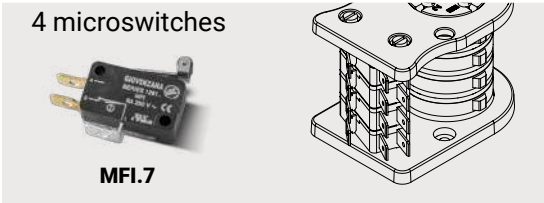

The **FGR3** coding system is very clear: each block of digits identifies a specific function. The code provides all the informations that can be used to specify each customization.

FGR3	0-8	001-999	0-2-3-4	1-2-3-4	-	00-99
Series	Encoder / Potentiometer	Nr. gear ratio	Micro/cams	Shaft type	-	Options
	0 = No sensors 1 = Incremental Encoder D22 2 = Potentiometer 2.5 K Ω 3 = Potentiometer 5 K Ω 4 = Potentiometer 10 K Ω 5 = Absolut Encoder D36 6 = Incremental Encoder P/P 5000 imp. 7 = Absolut/Incremental Encoder D36 8 = Absolut Encoder D58 A ... Z = Custom on request	Between: - shaft and cam pack output; - shaft and sensor output; - both.	0 = None 2 = Nr. 2 3 = Nr. 3 4 = Nr. 4 5 = Nr. 5	1 = Single shaft and reduction in cam output. 2 = Double overhang shaft and reduction in cam output. 3 = Single shaft and reduction in both cam and sensor output. 4 = Double overhang shaft and reduction both in cam output and in sensor output.	-	Progressive versions



Available codes



Available options
















- Can be supplied with front fixing. Available different typologies of flanged accessories, on request.
- Can be equipped with MFI.7 microswitches (standard version) or with MFI.7D micro switches (gold contact blocks - offshore use).
- Can be equipped with incremental or absolut encoder, available also with external encoder mounted.

The **FGR3** series is a totally customizable products.
Create your own devices using the FGR3 coding system!

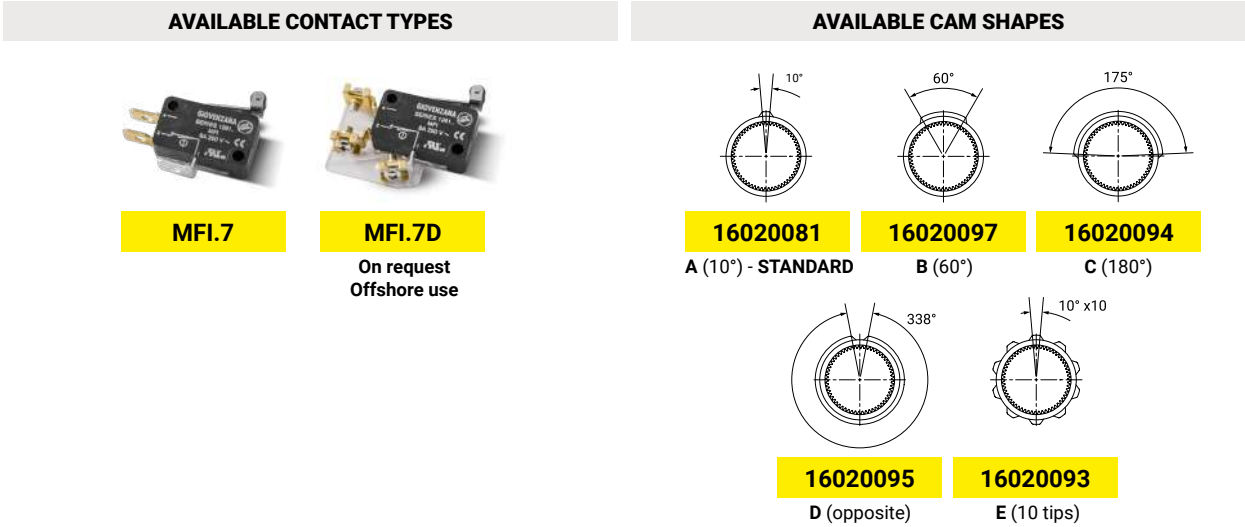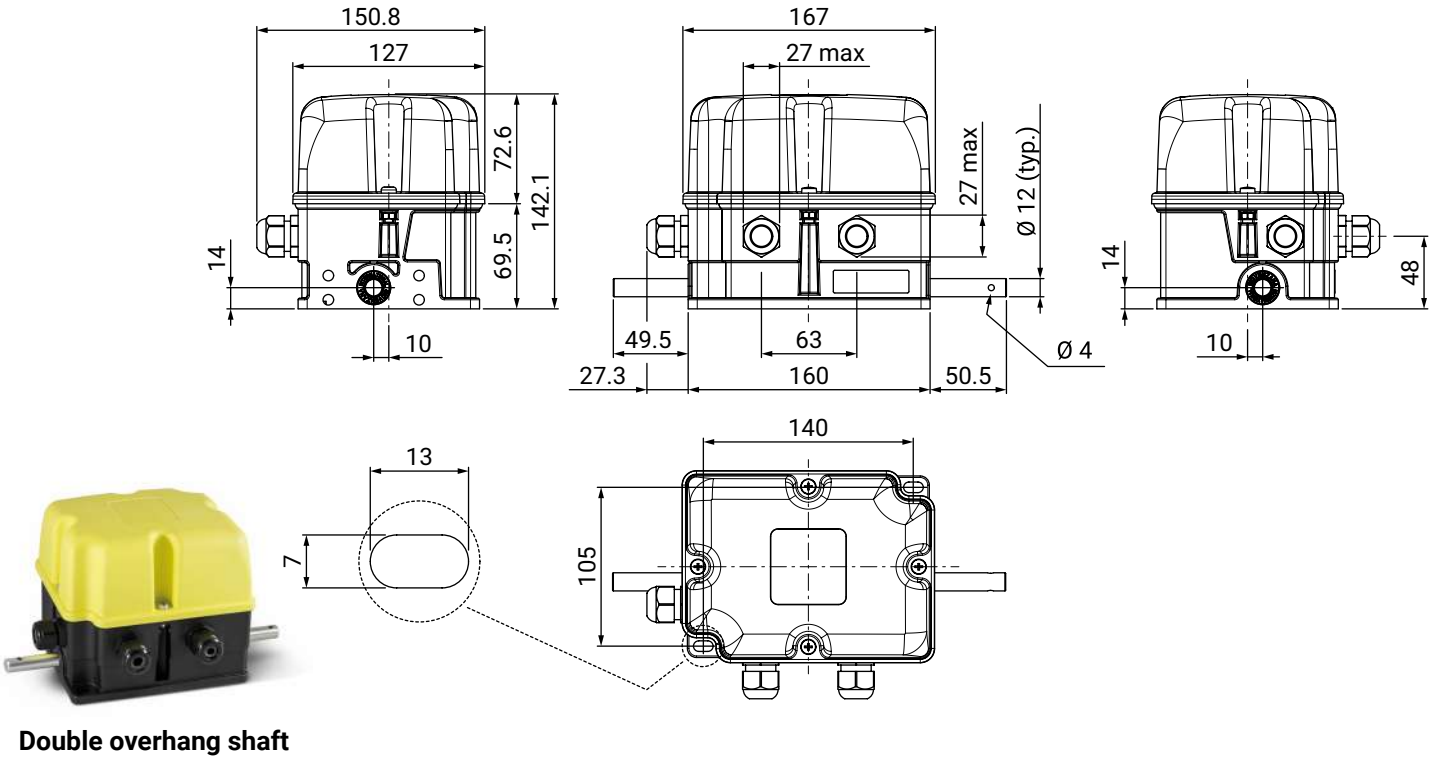


Water jet cut pinions

Our measuring pinions are specially manufactured for use with encoders and geared limit switches.
Pinions thickness = 10 mm.
























 	 	 	 
16020051 M20 - Z12 A = Ø 280 / B = Ø 193.2	16020052 M14 - Z17 A = Ø 266 / B = Ø 205.24	16020053 M22 - Z10 A = Ø 264 / B = Ø 168.52	16020054 M18 - Z12 A = Ø 252 / B = Ø 173.88
 	 	 	 
16020055 M16 - Z13 A = Ø 240 / B = Ø 170.56	16020056 M10 - Z17 A = Ø 190 / B = Ø 146.6	16020057 M6 - Z13 A = Ø 90 / B = Ø 63.96	16020070 M16 - Z19 A = Ø 336 / B = Ø 263.2

Detail C

For all previous pinions.
Finished product measurements.




Injection moulded pinions

 	 	 	 
16020058 M20 - Z8 A = Ø 200 / B = Ø 113.2	16020059 M13 - Z10 A = Ø 192 / B = Ø 122.56	16020060 M12 - Z12 A = Ø 176.4 / B = Ø 121.716	16020061 M14 - Z10 A = Ø 168 / B = Ø 107.24
 	 	 	 
16020062 M12 - Z10 A = Ø 144 / B = Ø 91.92	16020063 M10 - Z12 A = Ø 140 / B = Ø 96.6	16020064 M8 - Z12 A = Ø 112 / B = Ø 77.28	16020065 M6 - Z11 A = Ø 78 / B = Ø 51.96
 	 	 	 
16020066 M5 - Z12 A = Ø 70 / B = Ø 48.3	16020068 M16 - Z20 A = Ø 192 / B = Ø 122.56	16020069 M18 - Z11 A = Ø 234 / B = Ø 155.81	16020071 M16 - Z19 A = Ø 176 / B = Ø 107.285


Detail C

For all previous pinions.



Wheel coupling sleeve for water jet cut pinions

For the installation of the water jet cut pinions, the wheel coupling sleeve (code: 16020050) is required.

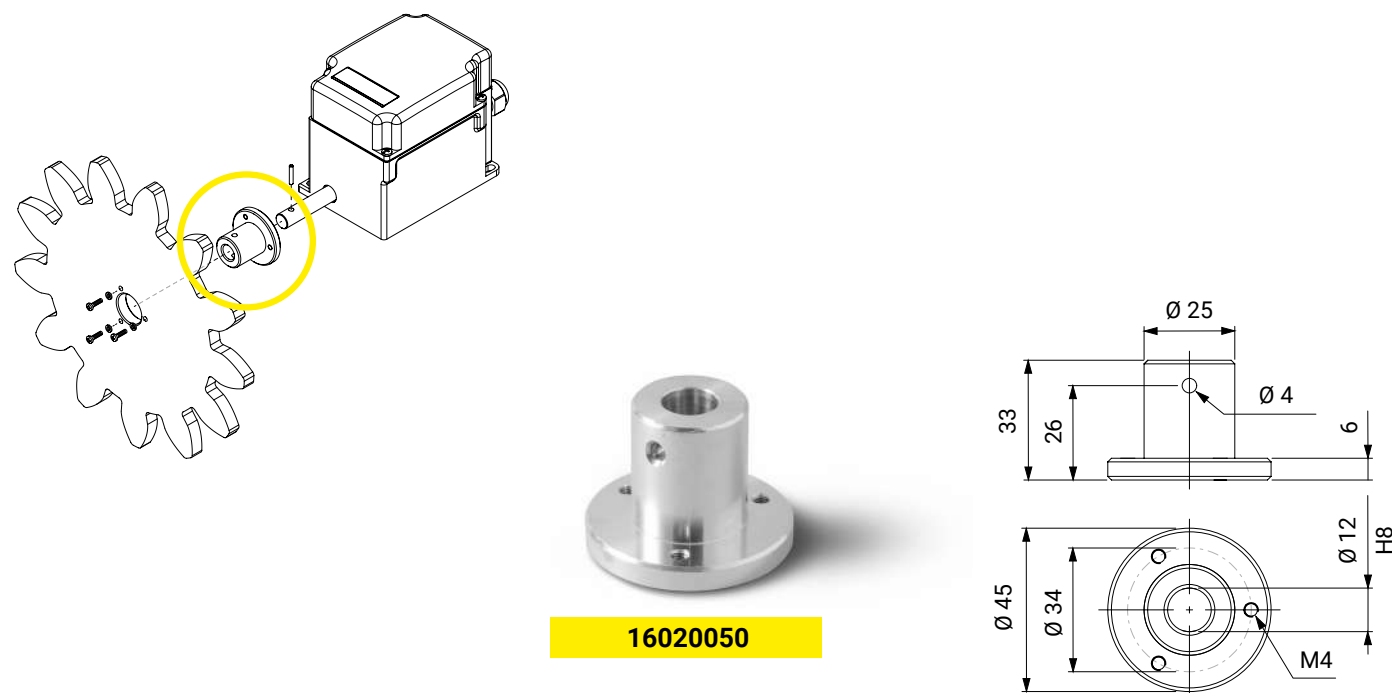


Oldham coupling for FGR1, FGR2, FGR3




- Oldham coupling
- Locking screw 4 x 40
- Spheres Ø 3 mm


The hole on the coupling may not be present

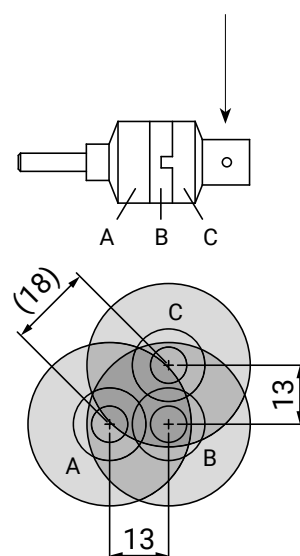

Maximum axial disalignment obtained without locking screw

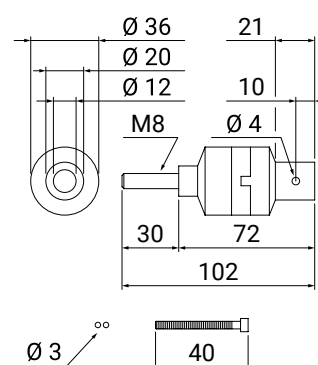


Cam shapes for FGR0, FGR1, FGR3

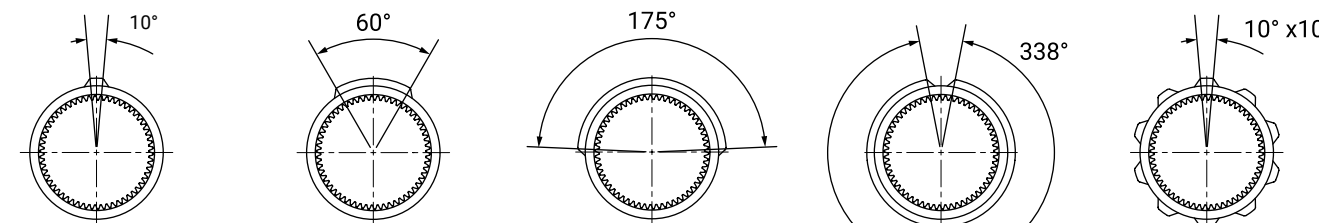

16020081	16020097	16020094	16020095	16020093
A (10°) - STANDARD	B (60°)	C (180°)	D (opposite)	E (10 tips)

Cam shapes for FGR2

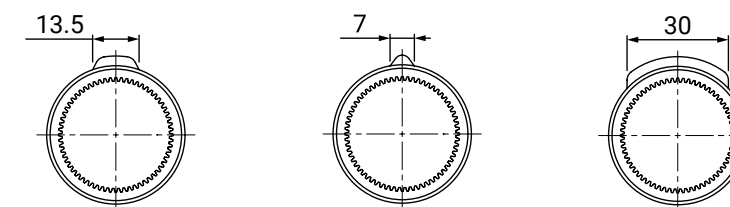

11703030	11703031	11703032
A (30°) - STANDARD	B (15°)	C (90°)

Available customised versions on request.

POSITION LIMIT SWITCHES

Giovenzana offers four different typologies of **position limit switches**, used in particular in industrial and construction lifting plants, in the automation industry, in stage technology, in particular to control hoists, winches and machine tools.

The range of position limit switches includes thermoplastic material limit switches allowing for diversified switch activation types:

- with cross rods;
- with single rod with roller;
- with lever.

Each position limit switches has specific features allowing to choose the limit switch that best suit the specific customers' needs.

All position limit switches are CE marked and they are manufactured in compliance with the directives and standards actually in force.

Furthermore, position limit switches are also EAC and CCC certified, for the Eurasian and Chinese markets, as proof of the importance given to the quality levels required in different countries.

APPLICATIONS


Our **position limit** switches are used to control several handling system:

SOPHISTICATED CRANE SYSTEM

The unit controls power operating system (ex. PLC) and allows the crane to slow-down and/or to stop running.

HOIST

The unit is used to stop the hoist running whenever it reaches a "limit" position.

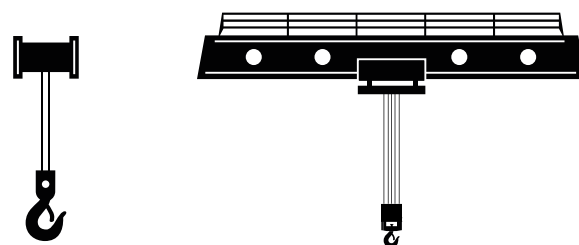

HOIST

CRANE

FEATURES

- Different versions are available for all standard system.
- Every customization is available upon request.

SERIES



FFH



FFH2C-1



FCR



FCP245

BENEFITS

- › Precise, reliable and safe devices
- › Good handling control ensured
- › Guaranteed maximum operating safety
- › Prevention of personal injury and damage to objects



FFH		FCR
GENERAL CHARACTERISTICS		
STANDARDS	IEC /EN 60497/3	IEC /EN 60497/3
CASE	Self extinguishing housing V0 UL94	Self extinguishing housing V0 UL94
PROTECTION CLASS	IP67 - Double insulation	IP65 - Double insulation (IEC / EN 60529)
CABLE ENTRY	M16 / M20	Nr 1 Ø 22.5 mm
VERSIONS	Single or double speed motor configuration. 3, 4 or 4 with mechanical stop positions.	Single or double speed motor configuration. 3, 4 or 4 with mechanical stop positions.
NOTES	Fully adjustable aluminium rods □ 2x200 mm with “0” indicator. Reinforced mechanical stop.	Fully adjustable aluminium rods □ 6x300 mm with “0” indicator. Reinforced mechanical stop.
AMBIENTAL TEMPERATURE	Operating: -25°C ... +55°C Storage: -30°C ... +70°C	Operating: -25°C ... +55°C Storage: -30°C ... +70°C

ELECTRICAL CHARACTERISTICS					
PRODUCT ID	P016 Giovenzana Cam switch line		P016 Giovenzana Cam switch line		
STANDARDS	IEC/EN 60947/3 – UL508		IEC/EN 60947/3 – UL508		
MARKING	CE, IMQ, RINA, EAC, CCC, cULus, cCSAus		CE, IMQ, RINA, EAC, CCC, cULus, cCSAus		
RATED OPERATING VOLTAGE - Ue	690V		690V		
RATED INSULATION VOLTAGE - Ui	690V		690V		
RATHED IMPULSE WITH-STAND VOLTAGE - Uimp	4kV		4kV		
RATHED THERMAL CURRENT - Ith	16A		16A		
ENCLOSED THERMAL CURRENT - Ithe	16A		16A		
RATHED OPERATING CURRENT	AC21A AC22A	16A - 690 V AC	16A - 690 V AC		
	AC23A 3ph 230V	13A - 4 kW	13A - 4 kW		
	AC23A 3ph 400V	13A - 7.5 kW	13A - 7.5 kW		
FREQUENCY	50 / 60 Hz		50 / 60 Hz		
CONTACTS	Double gap positive opening ➞		Double gap positive opening ➞		
BLOCK CALIBER	A3 (EN 60947-1)		A3 (EN 60947-1)		
TERMINAL SCREW	M3.5		M3.5		
TIGHTENING TORQUE	0.8 Nm / 7.2 lbin (EN60947-1) 7.5 lbin / 0.85 Nm (UL508)		0.8 Nm / 7.2 lbin (EN60947-1) 7.5 lbin / 0.85 Nm (UL508)		
CON-NECTABLE SECTION	Flexible conductors	1 x 0.75 / 4 ... 2 x 0.75 / 2.5 mm² 10 ... 18 AWG	1 x 0.75 / 4 ... 2 x 0.75 / 2.5 mm² 10 ... 18 AWG		
	Solid conductors	1 x 0.75 / 4 ... 2 x 0.75 / 2.5 mm² 10 ... 18 AWG	1 x 0.75 / 4 ... 2 x 0.75 / 2.5 mm² 10 ... 18 AWG		

FFH2C-1		FCP245
GENERAL CHARACTERISTICS		
STANDARDS	IEC /EN 60497/3	IEC /EN 60497/3, EN 81-1
CASE	Self extinguishing housing V0 UL94	Self extinguishing housing V0 UL94
PROTECTION CLASS	IP65 - Double insulation (IEC / EN 60529)	IP65 - Double insulation (IEC / EN 60529)
CABLE ENTRY	1 x M16 + 1 x M20	M20 (max 8)
VERSIONS	Single speed motor configuration. Other configurations on request.	Two pole on-off switch. Other configurations on request.
NOTES	Fully adjustable aluminium rod □ 6x120 mm with “0” indicator. Reinforced mechanical stop. Rubber covering wheel.	Reinforced mechanical stop.
AMBIENTAL TEMPERATURE	Operating: -25°C ... +55°C Storage: -30°C ... +70°C	Operating: -25°C ... +55°C Storage: -30°C ... +70°C

ELECTRICAL CHARACTERISTICS					
PRODUCT ID	PX20 Giovenzana Cam switch line		CX40 Giovenzana Cam switch line		
STANDARDS	IEC/EN 60947/3 – UL508		IEC/EN 60947/3 – UL508		
MARKING	CE, IMQ, RINA, EAC, CCC, cULus, cCSAus		CE, IMQ, RINA, EAC, CCC, cULus, cCSAus		
RATED INSULATION VOLTAGE - Ui	690V		690V		
RATED INSULATION VOLTAGE - Ui	690V		690V		
RATHED IMPULSE WITH-STAND VOLTAGE - Uimp	5kV		10kV		
RATHED THERMAL CURRENT - Ith	20A		40A		
ENCLOSED THERMAL CURRENT - Ith	20A		40A		
RATHED OPERATING CURRENT	AC21A AC22A	20A - 690 V AC	40A - 690 V AC		
	AC23A 3ph 230V	16A - 5 kW	35A - 11 kW		
	AC23A 3ph 400V	16A - 9 kW	32A - 18.5 kW		
FREQUENCY	50 / 60 Hz		50 / 60 Hz		
CONTACTS	Double gap positive opening ➞		Double gap positive opening ➞		
BLOCK CALIBER	A3 (EN 60947-1)		A5 (EN 60947-1)		
TERMINAL SCREW	M3.5		M4		
TIGHTENING TORQUE	0.8 Nm / 7.2 lbin (EN60947-1) 7.5 lbin / 0.85 Nm (UL508)		1.2 Nm (EN60947-1) 10.6 lbin (UL508)		
CON-NECTABLE SECTION	Flexible conductors	1 x 0.75 / 4 ... 2 x 0.75 / 2.5 mm² 10 ... 18 AWG	2 x 2.5 / 10 mm² 14 ... 6 AWG		
	Solid conductors	1 x 0.75 / 4 ... 2 x 0.75 / 2.5 mm² 10 ... 18 AWG	2 x 2.5 / 10 mm² 14 ... 6 AWG		

Position limit switch with reduced overall dimensions

The **FFH position limit switch** is used to control several handling systems:


- **Bridge cranes:** the limit switch controls the operating system, for example a PLC, and allows the bridge crane to slow down or stop.
- **Hoists:** the limit switch is used to stop the hoist whenever it reaches a limit position.

Features

- Designed to ensure excellent performances in the most challenging operating conditions.
- Compact design to be adapted in any application need.
- Reduced overall dimensions compared to the historical FCR series.
- Arranged with 4 fixing holes.
- Positive opening NC contacts for safety functions.
- IP67 Protection degree.
- Aluminium rods with 6x6 mm section and enclosure in thermoplastic material.
- Cross rods with 4 maintained positions every 90°.
- Arranged with 2 outputs for cable clamps to reduce installation time and make wiring easier.
- Available different versions, also customizable on request.

Compliance and certifications

- 2014/35/UE - 2011/65/UE - 2015/863/UE
- EN 60947-1 (2007/A1 : 2011/A2 : 2014)
- EN 60947-3 (2009/A1 : 2012/A2 : 2015)
- EN 60204-1 (2006/A1 : 2009)
- EN 60529 (1991/A1 : 2000/A2 : 2013)
- EN 50581 (2012)
- IEC 63000 (2016)

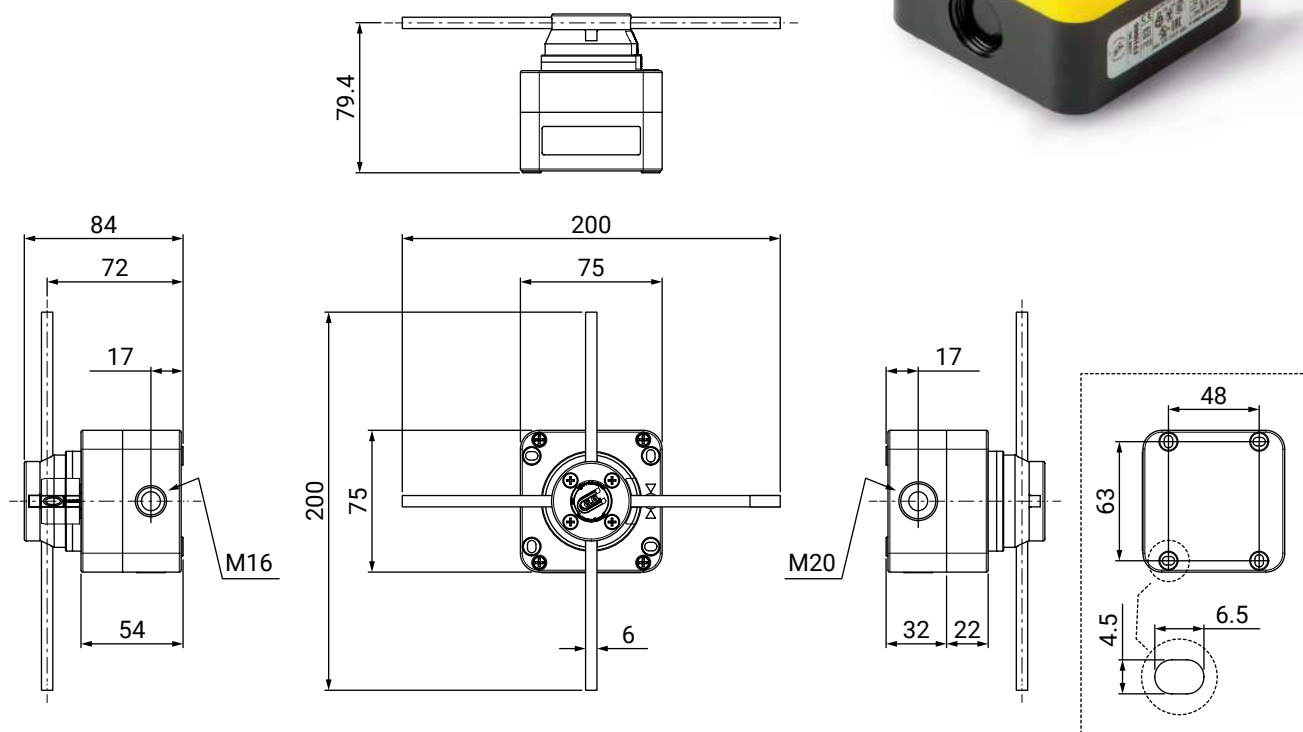

Available codes



cam switch
P016 line



contact open contact close

	FFH001	Single speed 3 positions With mechanical interlock ●	<table><tr><td>contacts</td><td>3 - 4</td><td></td><td></td><td></td></tr><tr><td></td><td>1 - 2</td><td></td><td></td><td></td></tr><tr><td></td><td></td><td>- 90°</td><td>0</td><td>+ 90°</td></tr></table> positions	contacts	3 - 4					1 - 2						- 90°	0	+ 90°															
contacts	3 - 4																																
	1 - 2																																
		- 90°	0	+ 90°																													
	FFH002	Single speed 3 positions With mechanical interlock	<table><tr><td>contacts</td><td>7 - 8</td><td></td><td></td><td></td></tr><tr><td></td><td>5 - 6</td><td></td><td></td><td></td></tr><tr><td></td><td>3 - 4</td><td></td><td></td><td></td></tr><tr><td></td><td>1 - 2</td><td></td><td></td><td></td></tr><tr><td></td><td></td><td>- 90°</td><td>0</td><td>+ 90°</td></tr></table> positions	contacts	7 - 8					5 - 6					3 - 4					1 - 2						- 90°	0	+ 90°					
contacts	7 - 8																																
	5 - 6																																
	3 - 4																																
	1 - 2																																
		- 90°	0	+ 90°																													
	FFH003	Single speed 4 positions Without mechanical interlock	<table><tr><td>contacts</td><td>3 - 4</td><td></td><td></td><td></td></tr><tr><td></td><td>1 - 2</td><td></td><td></td><td></td></tr><tr><td></td><td></td><td>0</td><td>90°</td><td>180°</td></tr></table> positions	contacts	3 - 4					1 - 2						0	90°	180°															
contacts	3 - 4																																
	1 - 2																																
		0	90°	180°																													
	FFH004	Single speed 4 positions Without mechanical interlock	<table><tr><td>contacts</td><td>-</td><td colspan="4">empty</td></tr><tr><td></td><td>5 - 6</td><td></td><td></td><td></td><td></td></tr><tr><td></td><td>-</td><td colspan="4">empty</td></tr><tr><td></td><td>1 - 2</td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td>0</td><td>90°</td><td>180°</td><td>270°</td></tr></table> positions	contacts	-	empty					5 - 6						-	empty					1 - 2							0	90°	180°	270°
contacts	-	empty																															
	5 - 6																																
	-	empty																															
	1 - 2																																
		0	90°	180°	270°																												
	FFH005	Single speed 4 positions Without mechanical interlock	<table><tr><td>contacts</td><td>-</td><td colspan="4">empty</td></tr><tr><td></td><td>5 - 6</td><td></td><td></td><td></td><td></td></tr><tr><td></td><td>-</td><td colspan="4">empty</td></tr><tr><td></td><td>1 - 2</td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td>0</td><td>90°</td><td>180°</td><td>270°</td></tr></table> positions	contacts	-	empty					5 - 6						-	empty					1 - 2							0	90°	180°	270°
contacts	-	empty																															
	5 - 6																																
	-	empty																															
	1 - 2																																
		0	90°	180°	270°																												
	FFH006	Double speed 4 positions With mechanical interlock ●	<table><tr><td>contacts</td><td>7 - 8</td><td></td><td></td><td></td><td></td></tr><tr><td></td><td>5 - 6</td><td></td><td></td><td></td><td></td></tr><tr><td></td><td>3 - 4</td><td></td><td></td><td></td><td></td></tr><tr><td></td><td>1 - 2</td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td>- 180°</td><td>- 90°</td><td>0</td><td>+ 90° + 180°</td></tr></table> positions	contacts	7 - 8						5 - 6						3 - 4						1 - 2							- 180°	- 90°	0	+ 90° + 180°
contacts	7 - 8																																
	5 - 6																																
	3 - 4																																
	1 - 2																																
		- 180°	- 90°	0	+ 90° + 180°																												

Position limit switch

The **FCR position limit switch** is used to control several handling systems:


- **Bridge cranes:** the limit switch controls the operating system, for example a PLC, and allows the bridge crane to slow down or stop.
- **Hoists:** the limit switch is used to stop the hoist whenever it reaches a limit position.

Features

- Designed to guarantee excellent performance in the most challenging operating conditions.
- Arranged with 4 fixing holes.
- Positive opening NC contacts for safety functions.
- IP65 protection degree.
- Aluminium rods with 6x6 mm section and enclosure in thermoplastic material.
- Cross rods with 4 maintained positions every 90°.
- Arranged with 1 output for cable clamps to reduce installation time and make wiring easier.
- Available different versions, also customizable on request.

Compliance and certifications

- 2014/35/UE - 2011/65/UE - 2015/863/UE
- EN 60947-1 (2007/A1 : 2011/A2 : 2014)
- EN 60947-3 (2009/A1 : 2012/A2 : 2015)
- EN 60204-1 (2006/A1 : 2009)
- EN 60529 (1991/A1 : 2000/A2 : 2013)
- EN 50581 (2012)
- IEC 63000 (2016)

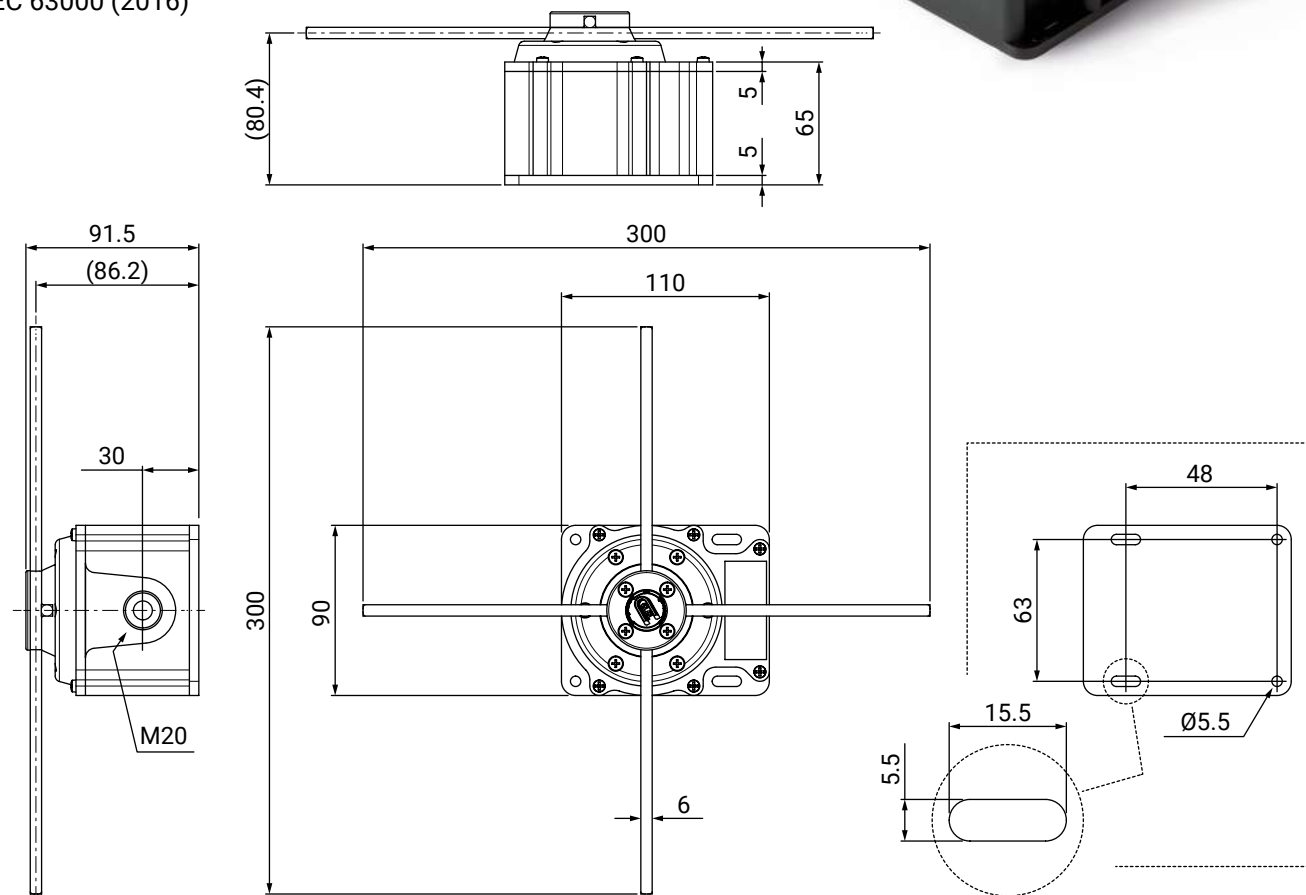

Available codes



cam switch
P016 line



contact open contact close

	FCR001	Single speed 3 positions With mechanical interlock ●	
	FCR002	Single speed 3 positions With mechanical interlock ●	
	FCR003	Single speed 4 positions Without mechanical interlock	
	FCR004	Single speed 4 positions Without mechanical interlock	
	FCR005	Single speed 4 positions Without mechanical interlock	
	FCR006	Double speed 4 positions With mechanical interlock ●	

Position limit switch

The **FFH2C-1 position limit switch** is used to control several handling systems:

- **Bridge cranes:** the limit switch controls the operating system, for example a PLC, and allows the bridge crane to slow down or stop.
- **Hoists:** the limit switch is used to stop the hoist whenever it reaches a limit position.

Features

- Designed to guarantee excellent performance in the most challenging operating conditions.
- Arranged with 4 fixing holes.
- Positive opening NC contacts for safety functions.
- IP65 protection degree.
- Aluminium rod with 6x6 mm section and enclosure in thermoplastic material.
- Equipped with rod with roller with 65° movements and spring return.
- Arranged for 2 outputs for cable clamps to reduce installation time and make wiring easier.

Compliance and certifications

- 2014/35/UE - 2011/65/UE - 2015/863/UE
- EN 60947-1 (2007/A1 : 2011/A2 : 2014)
- EN 60947-3 (2009/A1 : 2012/A2 : 2015)
- EN 60204-1 (2006/A1 : 2009)
- EN 60529 (1991/A1 : 2000/A2 : 2013)
- EN 50581 (2012)
- IEC 63000 (2016)




Available codes




cam switch
PX20 line



contact open contact close

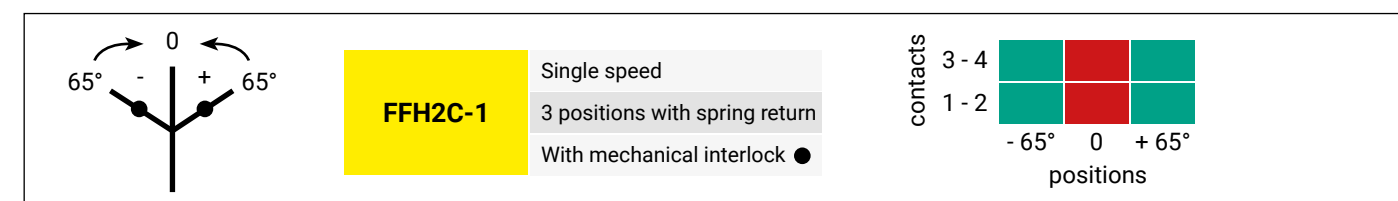

Other configurations on request.

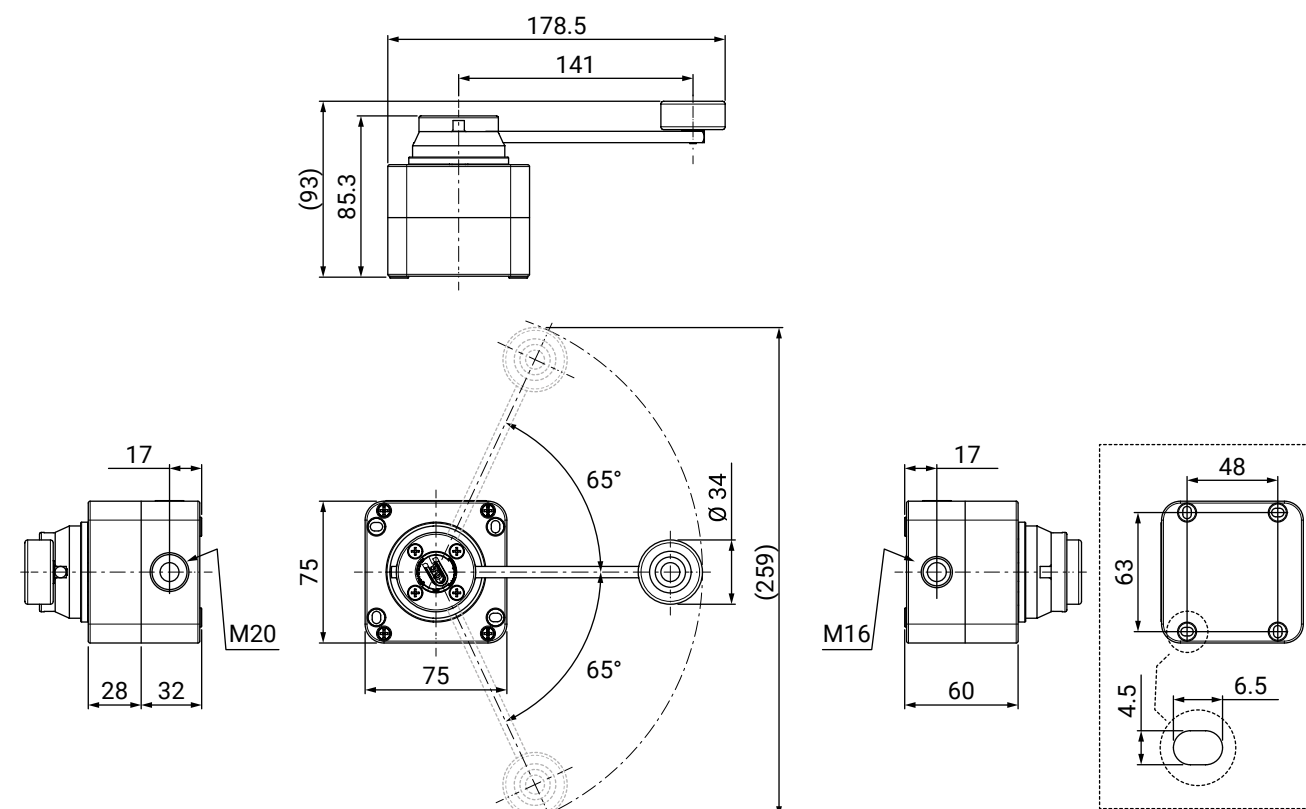

Position limit switch

The **FCP245 position limit switch** is used to control several handling systems:

- **Hoists:** the limit switch is used to stop the hoist whenever it reaches a limit position.

Features

- Designed to guarantee excellent performance in the most challenging operating conditions.
- Arranged with 4 fixing holes.
- Positive opening NC contacts for safety functions.
- IP65 protection degree.
- Aluminium rod and lever, enclosure in thermoplastic material.
- Equipped with lever with 50° movements and spring return.
- Arranged for 2 outputs for cable clamps to reduce installation time and make wiring easier.

Compliance and certifications

- 2014/35/UE - 2011/65/UE - 2015/863/UE
- EN 60947-1 (2007/A1 : 2011/A2 : 2014)
- EN 60947-3 (2009/A1 : 2012/A2 : 2015)
- EN 60204-1 (2006/A1 : 2009)
- EN 60529 (1991/A1 : 2000/A2 : 2013)
- EN 50581 (2012)
- IEC 63000 (2016)




Available codes


cam switch
CX40 line



contact open contact close

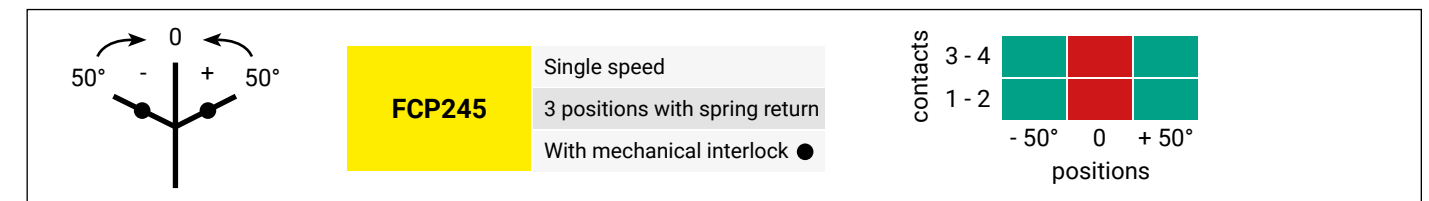


Other configurations on request.

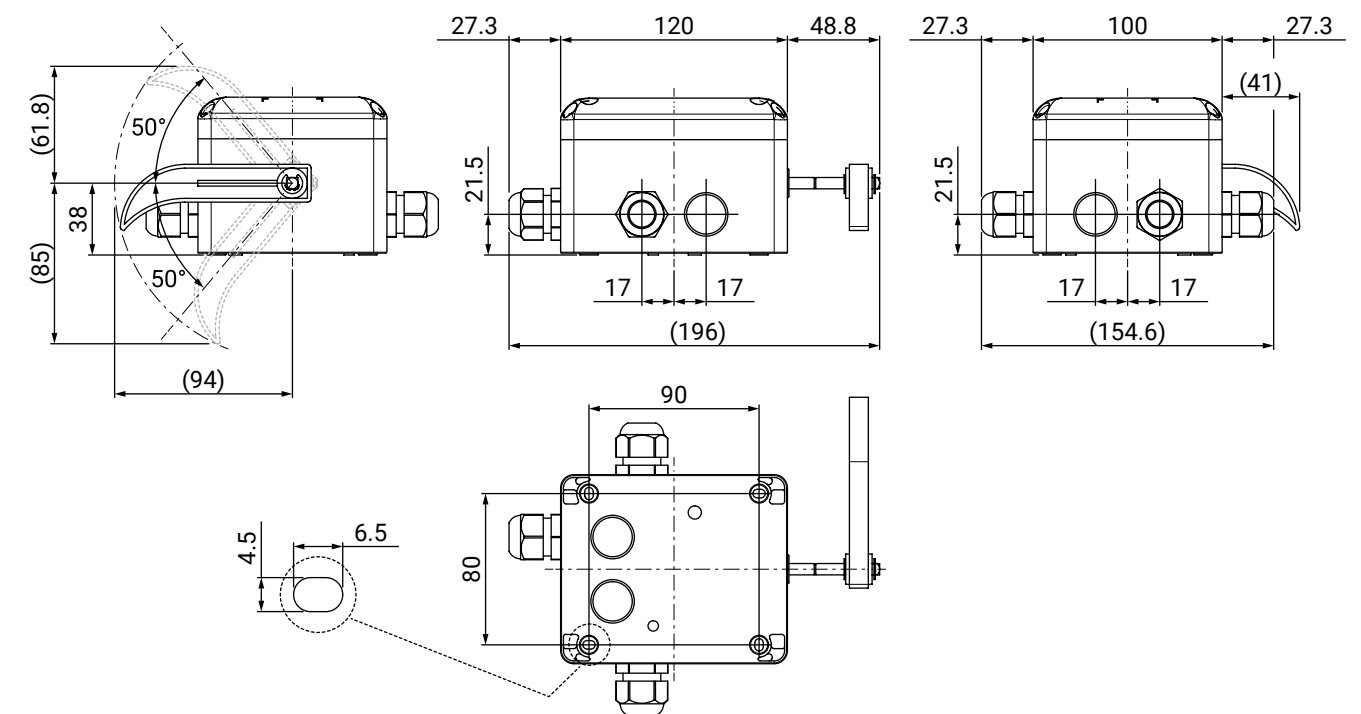



- **OPERATING TIME:** The operating life of a slip ring depends on the rotation speed and the dynamic stability.
- **CURRENT RATING:** Capacity can be increasing by connecting in series or parallel two or more slip rings.
- **SPEED OPERATION:** Max rotation speed 20 turns 1'.

RINGS NR.	CODE	A (HEIGHT)
3	30402091	180
4	30402092	195
5	30402093	210
6	30402094	225
7	30402095	240
8	30402096	255
9	30402097	270
10	30402098	285
11	30402099	300
12	30402100	315
13	30402101	330
14	30402102	345
15	30402103	360

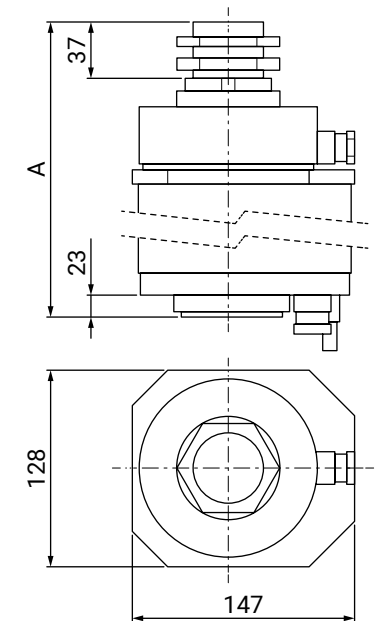

- Rated insulation voltage Ui 690V.
- Rated operating voltage Ue 500Vac.
- Rated operating current 20A.
- Intermittent working 30A.
- IP51 close frame version with protection rated IEC/EN60529.
- Modularity: from 3 up to 15 rings Ø80 mm.
- Copper brushes.
- Shaft Ø42 mm.
- PVC Ø147 mm housing and terminals cover.
- Ambient temperature: +60°C/-30°C.

WARNING HORNS

TECHNICAL DATA

- Continuous operation.
- Frequency: **G75**: 50 Hz - **G100**: 300÷350 Hz.
- Sound-pressure level (at 1 meter): **G75**: 88 dB (A) - **G100**: 93.5 dB (A).
- Wall mounted.
- Protection class (IEC/EN 60529): G75: IP30 - G100: IP65 double insulated.
- Terminal type: **G75**: 3 way terminal (2+T) - **G100**: 2 way terminal.



G75 LINE (Ø 75)			G100 LINE (Ø 100)		
SUPPLY	CONSUMPTION	CODE	SUPPLY	CONSUMPTION	CODE
24 AC	190 mA	G75.24	24 AC	415 mA	G100.24
48 AC	80 mA	G75.48	48 AC	210 mA	G100.48
110 AC	28 mA	G75.110	110 AC	90 mA	G100.110
230 AC	20 mA	G75.230	230 AC	42 mA	G100.230
24 DC	40 mA	G75.24DC			
48 DC	-	G75.48DC			




BOX - G75 LINE

11710009



BOX - G100 LINE

11710010

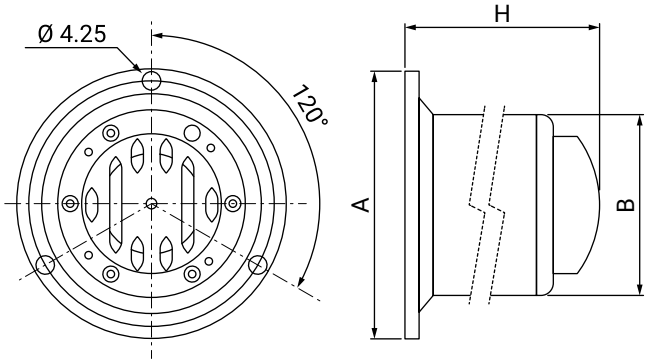

G75 LINE	G100 LINE
A = Ø 95.5	A = Ø 120
B = Ø 76.5	B = Ø 95.5
H = 56	H = 58