




FTNG141...


LIMIT SWITCH WITH Ø50 RUBBER ROLLER LEVER

40 mm thermoplastic limit switches for heavy applications
Head and lid fixed by threaded inserts and metric screws
Horizontal action
Adjustable lever (18° steps)
Adjustable head (90° steps)
Electrically independent contacts (Zb)
Enclosure IP rating: IP67
Compliance: EN 50041, IEC/EN 60947-5-1, UL 508, up to SIL3
Marking: CE, CCC, UL, EAC, UKCA

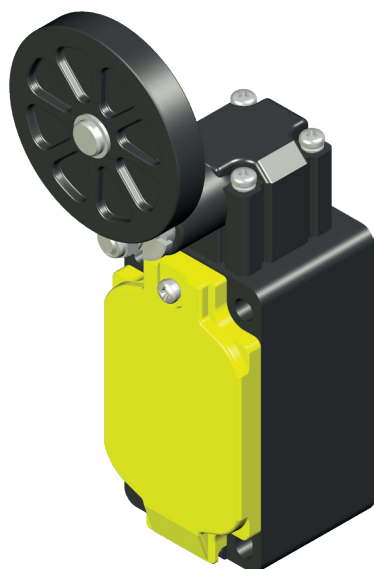


Series

FTNG 40 mm thermoplastic
limit switches for
heavy applications




Type

1 standard




Head and actuator

41 Ø50 rubber
roller lever



Contact type

X11 1NO/1NC slow action Zb
W02 2NC slow action Zb
W20 2NO slow action Zb
Z11 1NO/1NC snap action Zb
Z02 2NC snap action Zb
W12 1NO/2NC slow action Zb
W03 3NC slow action Zb



Lead exit dimension or type






blank M20 (standard)
N 1/2NPT
G3 PG13.5
C male connector

Positive opening operation		NC contact $\ominus$
Minimum current		5 mA - 5 V DC
Thermal current	I _{th}	10 A
Rated insulation voltage	U _i	500 V
Rated impulse withstand voltage	U _{imp}	6 kV
Insulation resistance	min	100 MΩ (DC 500 V)
Contact resistance	max	25 mΩ (initial)
Switching speed	max	250 mm/s
Switching frequency	max	6000 operations per hour
Enclosure material		glass filled PBT (UL approved)
Enclosure IP rating		IP67
Operating temperature		-25 ... +80°C (-13 ... +176°F)
Pollution degree		3
Protection against electric shock		class II (double insulation) $\square$
Mechanical life expectancy	min	1×10 ⁷ cycles
Electrical life expectancy	min	150000 cycles
Vibration	IEC 68-2-6	10-55 ±1 Hz
	excursion	0.35 mm, 1 octave/min
Fixing		4 × M4 screws


FTNG141...

Contact types	Categories *	Ratings **	PT1	PT2 / RP	OF	POT ⊖	POF	TT
X11 1NO 1NC	A600 - Q600	AC15: 400 V - 4 A	33°	45°	6.5 N	45°	8.5 N	80°
W02 2NC			33°	-	6.5 N	45°	8.5 N	
W20 2NO			33°	-	6.5 N	-	-	
Z11 1NO 1NC	B600 - Q600	DC13: 24 V - 6 A	35°	15°	5.5 N	65°	13.2 N	80°
Z02 2NC			35°	15°	5.5 N	65°	13.2 N	
W12 1NO 2NC	A300 - Q300	-	35°	42°	6.5 N	50°	8 N	80°
W03 3NC			35°	-	6.5 N	50°	8 N	


* UL 508 / CSA C22-2 n° 14 ** IEC/EN 60947-1



(*) Not suitable for safety applications.





- PT1 Operating travel
- PT2 Second operating travel (slow action)
- RP Release position (snap action)
- OF Operating force
- POT Positive opening travel ⊖
- POF Positive opening force
- TT Total travel

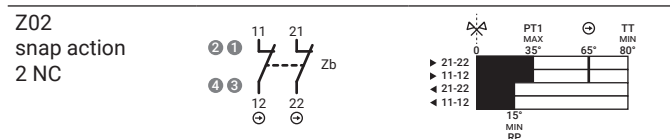

M12 Connector pin arrangement - on request

(1) Mounting holes
(2) Rubber roller

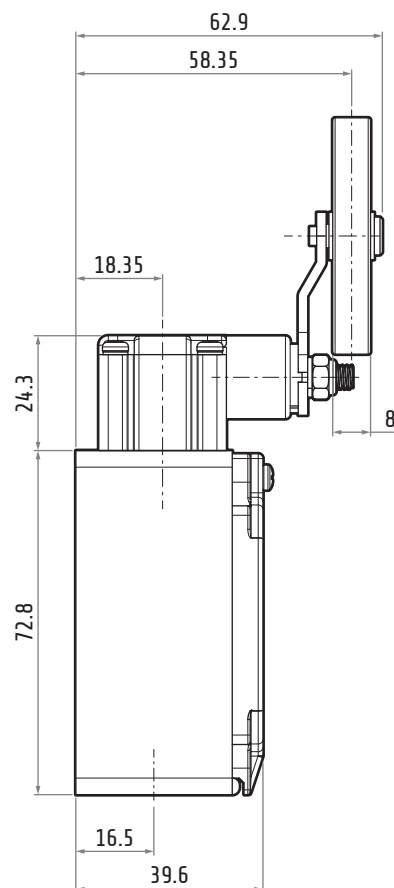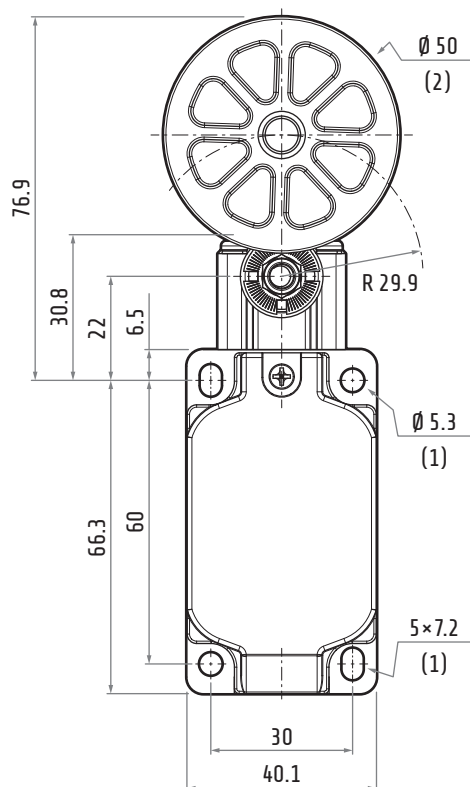

Dimensions in mm / illustrations NOT in scale