


# DOOR CONTACT - EDL SERIES


Enclosure Material	Cast Aluminum Alloy/Stainless Steel/Plastic
Contact Material	Cu-rivets with silver coating
Contact Type	1NC, 2NC
Switching Frequency	30 ops/min
Voltage Ratings	230VDC/240VAC
Current Ratings	2A
Ambient Temperature	-54~+121°C(-65~250°F)
Service Life	100,000 cycles
Degree of Protection	IP20 to IEC/EN60529




**EDL-1**

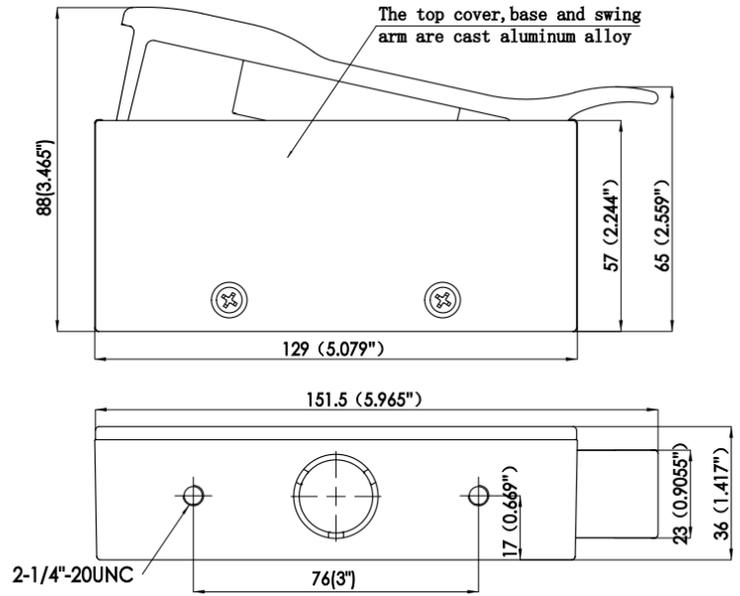


**EDLP-1**

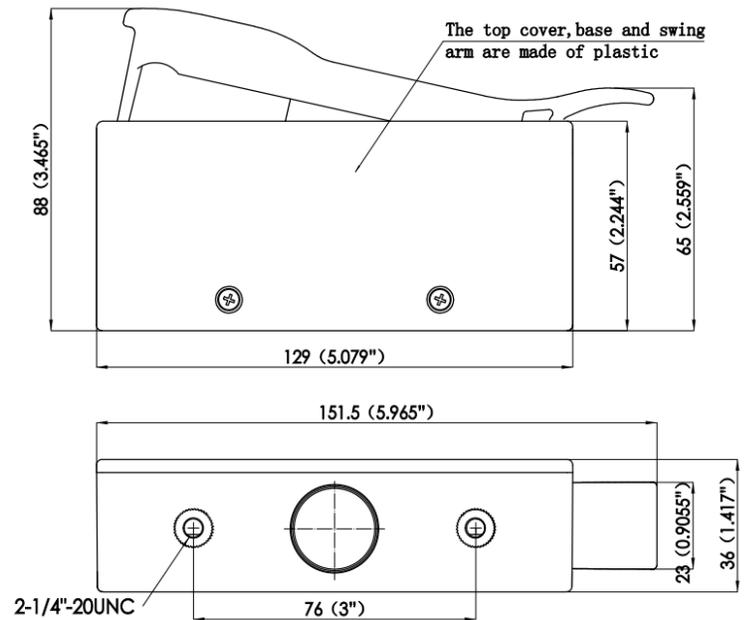


## EDL-2LB

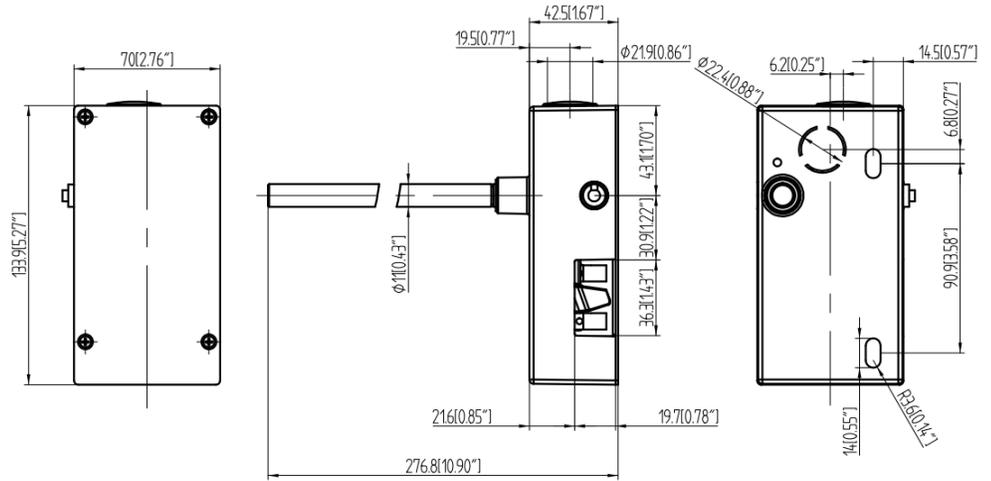


## EDL-2L

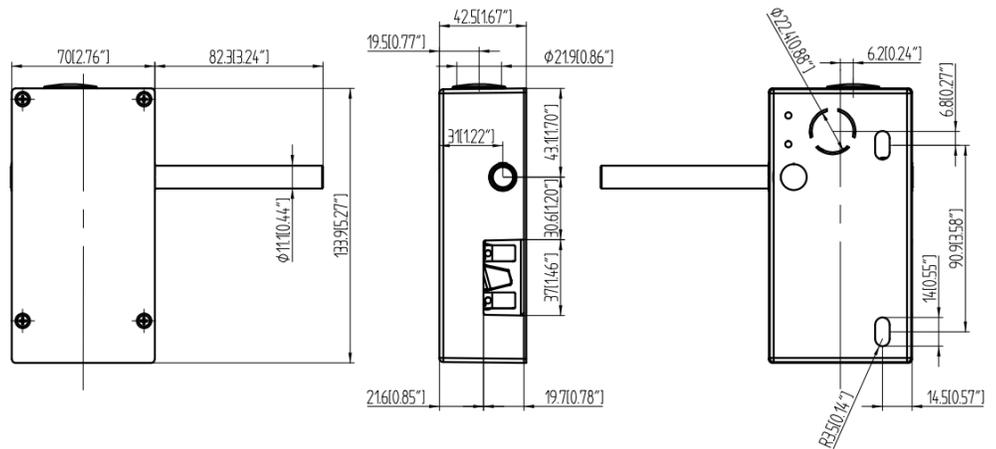


## EDL-3LB

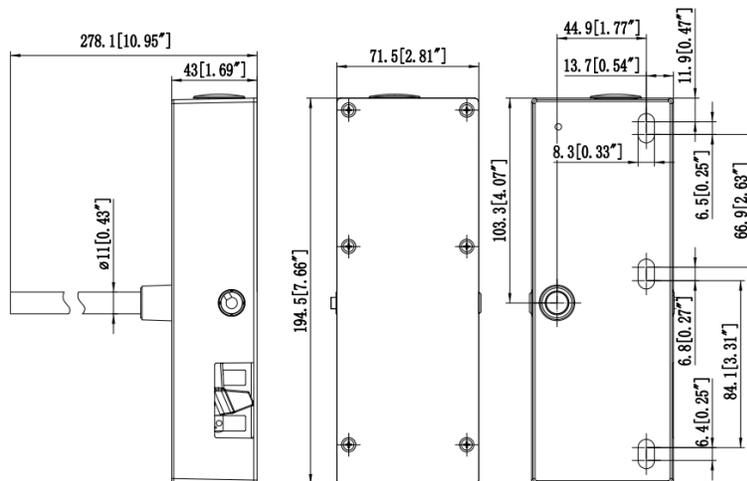


**EDL-3RB**

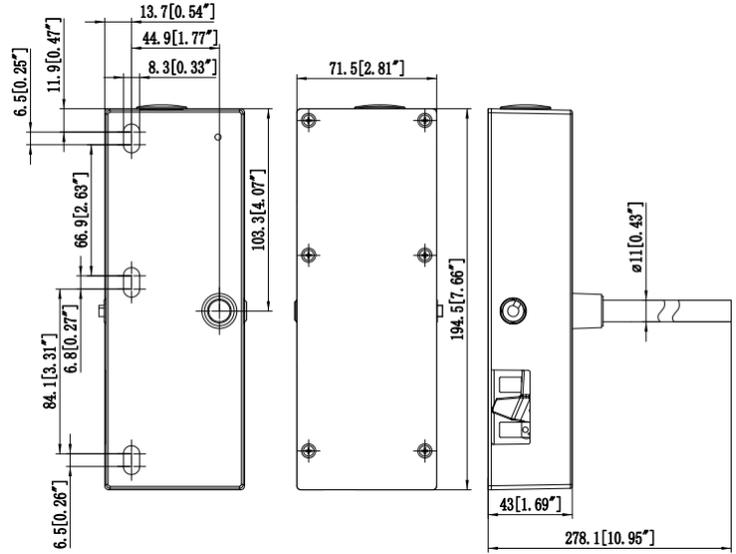

**Lever Options**

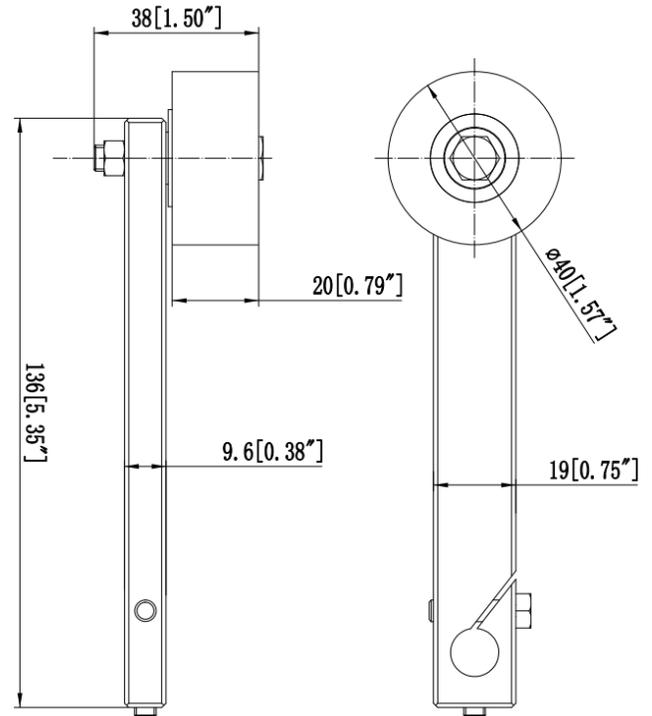

**EDL-3-K1**

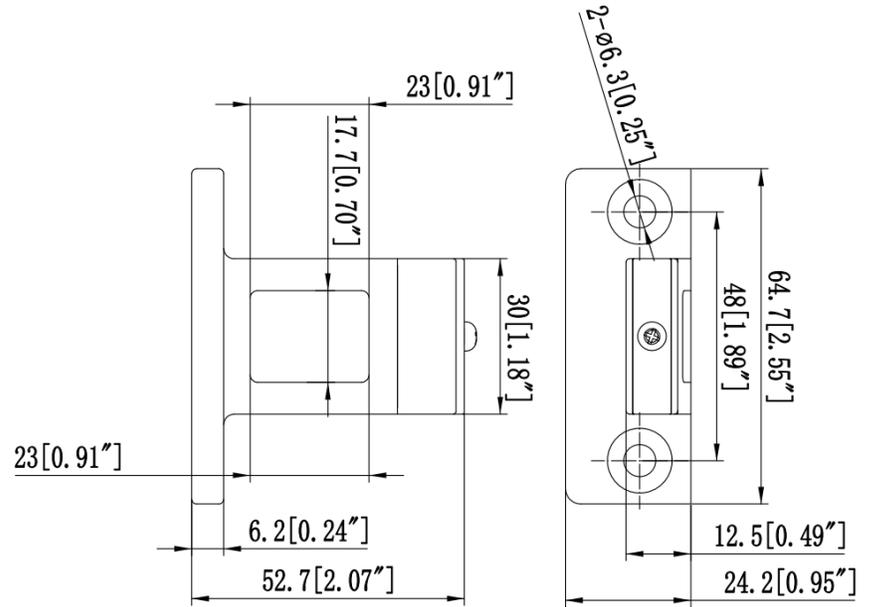

**EDL-3-K3**

